HITACHI

SM00031

C28WF530N
C28WF530N-IRISH
C28WF532N
C28WF535N
C32WF535N
C32WF535N-IRISH
CL28WF530AN
CL28WF535AN
CL32WF535AN

SERVICE MANUAL
MANUEL D'ENTRETIEN
WARTUNGSHANDBUCH

CAUTION:
Before servicing this chassis, it is important that the service technician read the "Safety Precautions" and "Product Safety Notices" in this service manual.

ATTENTION:
Avant d'effectuer l'entretien du châassis, le technicien doit lire les «Précautions de sécurité» et les «Notices de sécurité du produit» présentés dans le présent manuel.

VORSICHT:
Vor Öffnen des Gehäuses hat der Service-Ingenieur die „Sicherheitshinweise" und „Hinweise zur Produktsicherheit" in diesem Wartungshandbuch zu lesen.

Data contained within this Service manual is subject to alteration for improvement.

Les données fournies dans le présent manuel d'entretien peuvent faire l'objet de modifications en vue de perfectionner le produit.

Die in diesem Wartungshandbuch enthaltenen Spezifikationen können sich zwecks Verbesserungen ändern.

SPECIFICATIONS AND PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT

COLOUR TELEVISION
January 2001

A20 service information

POWER SUPPLY

This chassis has two main power supplies.
The first, main constituent parts are I905 (VIPER 20/50), T901, rectifier diode D953, opto isolator I997 and I943.
The second, main constituent parts are I900 (UC3844), Q903 (BUT12AF), Q904 (IRFS530A), T900, rectifier diodes D955, D970, D977 & D925, opto isolator I999 and Q923.

First power supply

At switch on the mains is applied to the bridge rectifier D961, D962, D963, D964 unlike previous chassis's there is not a large reservoir capacitor, it has been replaced by the network consisting of R909, C920, D920, D921, C921, D931, C905, D922, C908, D923 and D924. These components have been added to comply with HARMONIC legislation. The 375V dc output is applied to pin 2 of T901 (the primary winding) via R980 a 1Ω fusible resistor. Pin 7 of T901 is connected to pin 3 of I905.
The IC has an internal current source derived from the high voltage input to start the oscillator, this internal start up path is disconnected the voltage on the V_{DD} pin 2 reaches 11V, this is generated by the secondary winding between pins 4 & 5 of T901 and rectified by D992.
Pin 1has an R-C network connected to it for setting the switching frequency.
Pin 4 is the ground connection.
Pin 5 is the compensation input used to regulate the PWM output.
The main secondary winding (8V) of T901 is connected between pins 9+10 (ground) and 12+13, which is connected to D953, smoothed by C914/C916.
R944 and R945 are used to set a reference level for the gate of I943 a programmable reference device.
The cathode of I943 is connected to pin 2 of I997 (opto isolator). Pin 1 of which is pulled up from the 8V via R943. Pin 3 of I997 is connected to the primary side ground and pin 4 is connected to pin 5 of I905 forming the control circuit.
The output from D953 is then filtered by L911/C959 this is the header voltage for I903 a 5v regulator for the standby 5V used to supply the microprocessor and associated parts.
The MOSFET Q911 is controlled by the +17V generated by the second power supply (which is controlled by the ON/OFF line) switches the 8V to the rest of the chassis to be used by I401, I501 etc. The switched 8V also used as the header voltage for a 5V regulator I904 used by I401, U101 etc.

Caution if test equipment is attached or removed from pin 3 of I905 while the set is powered up I905 will be damaged!

Second power supply

The second power supply is used to generate the +B, +17V, -17V and a floating 14V for use by the DC to DC converter which controls the final +B.
The same bridge rectifier and harmonic suppression circuitry as the first power supply. The 375V is then applied to the collector of Q903 via the primary winding (pins 8 & 2) of T900. Initially the voltage on pin 7 of I900 will rise to approximately 16V via R901, D905 and Q913. This allows the internal circuitry of I900 to generate a sawtooth waveform at pin 4, from which a squarewave output is obtained at pin 6. This output is applied to the gate of Q901, which turns on, and off, this alters the voltage on the emitter of Q903 causing this device to turn on and off, generating the outputs in the secondary windings of T900.
When the 8V from the first power supply has stabilised and the microprocessor I003 has reset and taken control of the ON/OFF line, the second power supply will be turned off and then turned back on in a controlled manner at the correct time.
After initial power up I900 pin 7 is supplied from the bias winding (pin 4) of T900 via D916 for continued operation.
A current sense circuit consisting of R956, R994, R995 and VR904 feeds back a voltage to pin 3 of I900, MAX voltage approximately 0.8V. Should the applied voltage exceed the reference the pulse width is limited from output pin 6. In this way Q903 is offered protection from changes in primary current.
A sense voltage from potential divider R992 and R950, is supplied to pin 2 of I900, this is then compared to an internal reference voltage. If it exceeds the internal reference, the internal error amp will limit the output from pin 6.
R911, R912, Q923 and I999 regulate the secondary voltages of T900. R911 and R912 sample the +B to give a reference voltage to the gate of Q923.
I999 is dependent on the 8V from the first power supply to regulate the second power supply correctly, **if the 8V is missing the +B voltage will rise from approximately 170V to approximately 200V.**
D955 rectifies the +B that is smoothed by C950.
D925 rectifies the audio +17V that is smoothed by C952.
D977 rectifies the audio -17V that is smoothed by C951.

DC to DC converter

The main constituent parts of the DC to DC converter are I902, Q927, L961, Q964 and I964.
NOTE the 0V (pin 5) of I902 is floating connected to the Source of the Mosfet Q927.
The UC3843 (I902) differs from the UC3844 (I900) only in the maximum duty cycle available.

Device	Minimum duty cycle	Maximum duty cycle
UC3843	0%	100%
UC3844	0%	50%

The supply for pin 7 I902 is generated by the T900 winding between pins 12 + 10, when 9V is reached the oscillator pin 4 will produce a sawtooth waveform, and pin 6 will output the PWM waveform for the gate of the Mosfet Q927. The drain of Q927 is supplied by the +B from D955.
R968, R970 and R976 are used to sample the current, which is fed back to pin 3 I902.
L961 and C933 filter the final +B; R927 is used to supply a minimum load to ensure the continued correct operation of the converter. The regulation is carried out by R958, VR964 and R960 sampling the final +B, the slider of VR964 is connected to the gate of the programmable regulator Q964, the anode of which is connected to the main STAR GROUND. The cathode is connected to the opto isolator I964 pin 2, pin 1 is connected to the non switched 8V via R957. Pin 4 I964 is connected to the floating 0V and pin 5 is connected to pin 1 I902, which controls the output PWM at pin 6.
Under extreme picture conditions i.e. very dark or bright pictures, the final +B will be altered slightly automatically by the +B COMP circuit, the base of Q777 is connected to pin 4 T700 (FBT) via R776, R737. R959, R967 and R771 are effectively in parallel with R960 via the collector / emitter of Q777 which dependent on picture content adjusts the voltage on the gate of Q964.
The final +B is protected from excessive current due to a layer short within T700 or on one of it's secondary windings by I902 the duty cycle/pulse width thus limiting the current available, when this happens the frame output supply voltage drops sufficiently to turn off I601. The microprocessor will then turn the set into stand by when no frame pulse is detected.

POWER GOOD

The power good signal supplied to the microprocessor I003 is a mains frequency squarewave of approximately 3V3 amplitude. The base of Q922 is connected to the neutral side of the AC mains input via R902, D933 (56V Zener) and D939. The collector of Q922 is connected to pin 2 of I998 (opto isolator); pin 1 is connected to a 5V-reference voltage generated by I900 at pin 8. I998 pin 3 is connected to STAR GROUND and pin 4 to the power good line via R908. The power good line has a pull up resistor R020 to the 3V3 line generated by I001.

PROTECTION

Pin 21 is the PROT SENSE port on the micro processor I003, it is pulled up to the 3V3 rail via R033, when the PROT SENSE line is pulled low when the rail being protected fails the set will go into stand by.
Standard signal diodes are connected with their anodes to the prot sense line and their cathodes to the individual supply voltages.

Diode CRN	Supply rail protected
D601	14V I601
D622	200V CRT base
D645	45V I601
D745	20V CRT base
D984	+17V audio
D995	+5V

For EHT over voltage protection, the potential divider R718/R749 & R719 samples the 200V supply for the CRT base. The sampled voltage passes to the 36V Zener diode Z713, when the EHT rises sufficiently so that Z713 conducts the high is applied to the gate of Q702 via R716 the SCR turns on pulling the prot sense line low, putting the set into stand by.
The +B over current protection is described in the DC to DC converter section.

HORIZONTAL DEFLECTION

The horizontal drive signal is generated within I501by an internal Voltage Controlled Oscillator running at a frequency of 25 MHz. This oscillator is stabilised to that frequency by using the 12MHz frequency of the crystal oscillator as a reference. The horizontal output signal is generated by means of a second loop that compares the phase of the internal oscillator signal with the phase of the incoming flyback pulse.

To obtain a smooth switch-on and switch-off behaviour of the horizontal output stage the horizontal drive signal is switched-on and off via the soft-start/soft-stop procedure.
This function is realised by means of a variation of the TON of the horizontal drive pulse. When the soft-start procedure is completed the horizontal output is gated with the flyback pulse so that the horizontal output transistor cannot be switched-on during the flyback time.
Over voltage conditions (X-ray protection) can be detected via the EHT tracking pin.
The horizontal drive output pin 40 of I501 has an external pull up resistor to the 8V supply R533. The output is applied to the base of Q701 via R707. The collector is supplied from the +B via R705 and the primary of the drive transformer T702. The secondary of T702 drives the base of the line output transistor Q751. The collector is supplied from the +B via R735, L700 and the primary of the flyback Transformer.
The horizontal feed back to I501 pin 41 is taken from the collector of Q751 by capacitive divider C748/C769 & C708, passed through the R/C network of R724 & C724/C723 to the 5V6 Zener diode Z704, which is then clamped by diodes D713 & D714. It then passes through R765 to the base of Q711, the emitter of which as a pull up resistor to the 8V R769, this output is the applied to pin 41 I501 via R768.
A sandcastle pulse is visible at pin 41 is internally generated by I501.
Pin 50 (EHTO) I501 is used in 2 ways the first for EHT compensation, and is connected to the ACL pin 4 of T700 via R737 and R605. This is used to alter the frame amplitude when extremes of picture content are reached (bright or dark) to reduce the visible breathing.
Secondly it is used by the microprocessor I003 pin 1 to turn off the horizontal drive at mains off, standby and under fault conditions. A high is output from pin 1 (shutdown), applied to the base of Q 605 via R667. Q605 turns on pulling the base of Q606 low, which turns on applying a high voltage to pin 50 I501 via R616 and D603.

The horizontal drive will be stopped when pin 50 I501 exceeds 3.9V

VERTICAL DEFLECTION

The vertical deflection output IC I601 (TDA8358J) is a differential current amplifier. I501 generates the vertical drive pluses; C518 the vertical sawtooth capacitor is connected to pin 51 (VCS). The drive pulses are output from I501 pins 46 (VDRB) and 47 (VDRA), to I601 pins 2 & 1 respectfully via R608 and R607.
The supply voltage to pin 3 is generated by the FBT, is output from pin 5 rectified by D708 and smoothed by C726.
The flyback pulse generator supply voltage also comes from the FBT, from pin 8 is rectified by D604 and smoothed by C616.

Pin	Description
1	Vertical input (positive)
2	Vertical input (negative)
3	Supply voltage
4	Vertical output voltage B
5	East-West input voltage (not used)
6	Vertical ground
7	East-West ground
8	East-West output voltage (not used)
9	Flyback supply voltage
10	Vertical output voltage A
11	Guard output voltage (not used)
12	Input measuring resistor
13	Input compensation current

The East-West amplifier within the TDA8358 is not used in this application.

EAST-WEST CORRECTION

The East-West correction parabola is output from pin 45 of I501 this is applied to the gate of Q631. The source is connected to ground, and the drain is connected to the centre of the diode modulator (D706, D707 and D711) via R741 and the East-West injection coil L751.

Microcontroller Section on the A20 Chassis

Introduction:

The main microcontroller on the A20 chassis is located at I003 (SDA555xfl). This is a 52-pin shrink-DIP package. This device controls many of the other integrated circuits via dedicated input/output lines or the I2C bus. This device also generates the RGB signals for the on-screen display (OSD) menus and the teletext. The device acquires, decodes and displays teletext signals. This microcontroller has internal program for storage of software code. The television stores all the necessary customer preferences and operating settings in an on-board EEPROM (E2). This device can hold 2Kb of information for storing the programme information (frequency, name, AV setting, etc.), factory alignment settings (geometry, white balance, tuner AFC/AGC, etc.), service diagnostic errors and customer control settings (volume, brightness, contrast, etc.). This device communicates with the main microcontroller via the I2C bus.

Main Microcontroller (I003)

Introduction

The SDA555xfl is a microcontroller based on the 8051 core from Infineon. It is capable of displaying menus and teletext for 50Hz and 100Hz televisions. This device can acquire/decode and display pages of teletext information in FLOF (FastText) and TOP (only in Germany/Switzerland/Austria) modes. The device operates from a single 6MHz crystal and +3.3V and +2.5V supplies.

Description

Ground Connections

Pins 29 and 43 (VSS) are the ground connections for the digital parts of the device.
Pins 14 and 36 (VSSA) are the ground connections for the analogue parts of the device.

Supply Connections

Pins 11, 30 and 44 (VDD3.3) are the +3.3V supply for the microcontroller peripheral parts. The 3V3 supply is derived from the +5Vstandby supply by I001.
Pins 9 and 42 (VDD2.5) are the +2.5V supply for microprocessor core. The 2.5V supply is derived from the 3V3 supply D011.
Pins 13 and 37 (VDDA2.5) are the +2.5V analogue supply voltage pins for the ADC of the microcontroller. This supply comes from the same supply as the 2.5V core supply, through L003.

Crystal Oscillator Connections

Pins 34 and 35 are the 6MHz crystal oscillator connections for the microcontroller.

Reset Connection

Pin 33 is the active low RESET input of the microcontroller. This input is normally high under operating conditions, but changes state when the standby +3.3V power supply is below a threshold. In this circumstance, the reset IC (I007) pulls pin 33 low until the input of it is above this threshold. The diode (D015) ensures that the capacitor (C020) discharges quickly when the standby supply falls, so that the reset operates quickly. The capacitor (C020) charges up slowly when the standby supply is restored, ensuring that there is a reset delay.

Infra-red (IR) Receiver Input

Pin 24 is the IR receiver's filtered output. This input from the IR receiver (IR01) consists of PWM pulses between 0V and +3.3V. These pulses are decoded by the microcontroller. The Red LED on the front of the TV will briefly flash when a valid command has been received and decoded.

Horizontal and Vertical Synchronisation Connections

Pin 20 is the vertical synchronisation input from the deflection stage. This input is used for OSD vertical synchronisation. When the TV is in the standby state, this input is normally low. The vertical input is triggered on the rising edge (positive polarity). A failure of the signal at this input when the TV is powered up will cause the TV to go to standby and fault code 0004 to be set.
Pin 19 is the horizontal synchronisation input from the deflection stage. This input is used for OSD horizontal synchronisation. When the TV is in the standby state, this input is normally low. The horizontal input is triggered on the rising edge (positive polarity). A failure of the signal at this input when the TV is powered up will cause the TV to go to standby and fault code 0003 to be set.

General Input Connections

Headphone Input

Pin 26 is used to detect if the headphone has been inserted into its socket. This input is normally high unless the headphone has been inserted; in which case it is near 0V. When the headphone is inserted, the loudspeakers (and internal sub-woofer if available) in the television are automatically muted.

Protection Input

Pin 21 is used to determine if a protection fault has occurred on the chassis. This line is connected to various sensing points in the power supply and deflection stages. This line is normally high unless a fault has occurred; in which case it is near ground potential.

Power-Good Input

Pin 23 is used to indicate if the power has been removed from the TV. This input normally has a mains frequency square wave, which is monitored by the software in the microcontroller. If a failure of this signal occurs when the TV is powered up, the audio power amplifiers are muted and the television begins to power-down into standby. If a brief interruption of the mains supply occurs, the TV will enter the standby condition temporarily before powering back up a few seconds later.

DTT Fan Fail Input

Pin 25 is used only on an IDTV model fitted with a DTT module. It is used to indicate if a fault in the fan on the DTT unit has occurred. This input is normally HIGH unless a fault condition has been detected (0V).

Front Panel Buttons and SAV3 Socket Inputs

Pins 15 and 16 are 2 of the 4 ADC inputs of the microcontroller.
Pin 16 is connected to the Volume +/- buttons and the SAV3 (Hi-8) socket on the front panel of the TV. When the voltage on this pin is changed to a value in a certain window, the microcontroller will interpret it as either a volume up, volume down and/or an SVHS Hi-8 connector was inserted into the Hi-8 socket.
Pin 15 is connected to the Programme +/- and Menu buttons on the front panel of the TV. When the voltage on this pin is changed to a value in a certain window, the microcontroller will interpret it as either a programme change or the menu button was pressed.

Analog Inputs

Pin 17 (ADC2) is the analogue input shared between the tuner AGC feedback voltage input and the scart 4 pin 8 voltage input. The selection of input is made by I304 controlled by the ADC_SEL pin (I003 pin 2).
Pin 18 (ADC3) is the analogue input shared between the tuner scart 1 pin 8 voltage input and the scart 2 pin 8 voltage input. The selection of input is made by I304 controlled by the ADC_SEL pin (I003 pin 2).

General Output Connections

ADC select Output (ADC_SEL)

Pin 2 of the microcontroller is connected to the analogue switch I304. When this line is HIGH, the tuner AGC voltage is connected to ADC2, AV1.SW (scart pin 8 input) is connected to ADC3.
When this line is LOW, AV4.SW (scart pin 8 input) is connected to ADC2; AV2.SW (scart pin 8 input) is connected to ADC3.

Storage-Register Clock Output (RCLK)

Pin 50 of the microcontroller is connected to the rising edge (positive triggered) input (pin 12) of I004. This line is normally low when not communicating with the device or when shifting data into it. Once the full 8-bits have been shifted in, this line rises in order to latch the data to the device's outputs.

EEPROM Write Enable Output

Pin 32 is the E2 write enable output line, which is connected to pin 7 of the EEPROM (I006). When this output is HIGH, the E2 cannot be written to (write disable) but data from the device can be read. When this output is LOW, then data can be written to the E2. This hardware line helps to protect the E2 from inadvertent write operations, which could occur under abnormal circumstances.

Scart VideoLink Output

Pin 7 is used to apply an 8Volt signal on pin 8 of SCART1 on DTT models. This is to allow a VideoLink enabled VCR to record a programme from the DTT module timer.

Mute Output

Pin 3 is the mute output for the on-board audio amplifiers. This output is HIGH when the amplifiers are in the mute condition (e.g. Standby). When powering down, this output will quickly rise to mute the speakers, to prevent any unwanted 'popping' noises from being heard.

Compress Output

Pin 46 is the output for the compress relay control (where fitted). This output is HIGH to turn the compress relay on.

Rotation Output

Pin 45 is the output for the tube rotation control (where fitted). The output is a PWM signal, which is converted, to an analogue voltage level by the external low pass filter circuit.

VM On/Off Output Connection

Pin 6 is used to turn On (LOW) or Off (HIGH) the VM (velocity modulation) circuit of some high-end chassis. This improves the transition from black to white (and vice versa) areas of the picture to sharpen them up. This is particularly noticeable at the outer areas of the CRT.

Green LED Output

Pin 5 is the green LED output, which is only used on models fitted with a DTT module. This output is high when the green led is ON. When the DTT module is in the partial standby state or when recording a digital terrestrial programme, then this LED will be ON and will be mixed with the red LED to produce an amber colour. When the DTT module is connected via the telephone line and receives mail, then this LED will flash periodically to indicate this condition.

Red LED Output

Pin 4 is the red LED output, which is used to indicate the standby state and when an IR command has been successfully received and decoded. When the TV is in the standby state, this output will be HIGH to ensure that the red LED is brightly lit. When the TV is not in standby, then this output will be low, but the

red LED will remain dimly lit through resistor R066. When an IR command has been successfully received, then the LED will flash briefly, to inform the user that the button on the handset was pressed correctly.

I^2C Connections

Pin 49 is the I2C bus data input/output for transferring data between I2C devices that are always powered up. This line is connected to the EEPROM (I005) and the shift register (I004). This line is constantly active when the TV is powered up and normally changes state between HIGH and LOW.
Pin 48 is the I2C bus clock output for clocking the data to I2C devices that are always powered up. This line oscillates at a frequency around 30KHz
Pin 52 is the I2C bus data input/output for transferring data between all other I2C devices. This line is constantly active when the TV is powered up and normally changes state between HIGH and LOW. The circuit around Q002 performs conversion between the 3V3 levels of the micro and the 5V levels of the external circuits.
Pin 51 is the I2C bus clock output for clocking the data to all other I2C peripherals/devices. This line oscillates at a frequency around 30KHz. The circuit around Q005 performs conversion between the 3V3 levels of the micro and the 5V levels of the external circuits.

AVLink/diagnostic Connections

Pin 8 is the Avlink/diagnostics transmit line from the microcontroller to the avlink interface. It is connected to the base of Q004, used to drive the AVLink line low when transmitting.
Pin 22 is the Avlink/diagnostics receive line from the avlink interface. Diode D001 converts the +5V avlink levels to the 3.3-volt supply of the micro.

DTT RS232 Connections

Pin 47 is the RS232 transmit line from the microcontroller to the DTT module. It is connected to pin 3 of connector P005 for the DTT module.
Pin 28 is the RS232 receive line from the DTT module to the microcontroller. It is connected to pin 4 of connector P005 for the DTT module.

DTT Reset Output Connection

Pin 31 is connected to pin 1 of the DTT connector (P005) and switches low to reset the DTT module.

Shutdown Connection

Pin 1 is used to switch off the deflection stage and mute the amplifiers when a power failure occurs. This line is normally LOW but switches HIGH when power fails. This causes a voltage to be applied to the EHT feedback input (pin 50) of I501, simulating an over voltage condition and causing I501 to begin the standby procedure.

RGB Connections

Pin 41 is the OSD/Teletext RGB blanking signal necessary for allowing insertion of the OSD/Teletext onto the picture. When this output is high, then the RGB signal will be superimposed onto the current picture.
Pin 40 is the OSD blue signal necessary for displaying BLUE colours for the OSD and Teletext.
Pin 39 is the OSD green signal necessary for displaying GREEN colours for the OSD and Teletext.
Pin 38 is the OSD red signal necessary for displaying RED colours for the OSD and Teletext.

CVBS Connections

Pin 12 is the Composite Video signal input for Teletext, VPS and WSS slicing. It is normally AC coupled and internally clamped to ensure reliable operation. VPS (video programming system) is necessary when auto-sorting programmes in Germany/Austria/Switzerland. WSS (wide-screen signalling) is used to indicate the aspect ratio of the incoming signal. The TV can then use this information to display the picture in the correct format.

EEPROM (I006)

Introduction

The 24C16 EEPROM (E2) is a 16Kbit (2Kbyte) device that holds non-volatile data such as the 100 programmes, name, frequency, standard, AV setting, speaker language setting and teletext favourite pages. The EEPROM also holds diagnostic fault codes used to help identify previous faults with the chassis. The E2 also holds factory aligned parameters, such as the geometry, white balance, tuner AFC/AGC, model type, cathode level, etc. The E2 also holds the user's preferential settings, such as the volume, balance, contrast, brightness, etc. Data is written to and read from the device using the standard I2C protocols.

Description

Supply/Ground Connections

Pins 8 and 4 are the +3.3V supply and ground connections respectively. The EEPROM is powered from the +3.3V standby rail so that it always has power to it, even when the TV is in standby.

I2C Connections

Pin 5 is the I2C data line used to transfer serial data between the microcontroller and itself. Data is changed when the clock line is low and latched on the rising edge of the I2C clock.
Pin 6 is the I2C clock line needed to synchronise the I2C data transfer. The I2C master clock originates from the microcontroller.

Address Connections

Pins 1 to 3 are the address lines used to select the I2C slave address of the device. On the 24C16 device, these lines must be connected to ground in order to access the device properly.

Write Disable Connection

Pin 7 is the I2C write enable/disable input. When this input is HIGH, all I2C writes to the device are inhibited. When the pin is pulled low by the microcontroller, data can be written to the device. This prevents inadvertent write operations.

74HC595 Shift Register (I004)

Introduction

The 74HC595 is a 16-pin high-speed CMOS 8-bit shift register used for additional output port capability on the A20 chassis. Data is serially shifted into the device and then latched to the outputs when required.

Description

Supply/Ground Connections

Pins 16 and 8 are the +5V supply and 0V ground connections respectively. This device has +5V supplied to it, even when the TV is in the standby state. Capacitor C013 is used to de-couple the supply.

On/Off Output

Pin 6 is the On/Off line, which is set LOW to turn on the secondary supplies (+B, audio rails, +8V and +5V). The standby rails are unaffected when this output is HIGH (TV in the standby state). Under normal operating conditions, this output will be low when the TV is NOT in the standby condition.

On/Off 2 Output

Pin 7 is the On/Off 2 line, which is set LOW to turn on the DTT/ASW sub-power supply, if fitted.

MSP Reset Output Connection

Pin 5 is the MSP3410D reset line that is low when the MSP is being reset. This line is normally HIGH when the TV is operating correctly, and is set LOW to reset the MSP.

S2/S4 Output Connection

Pin 4 is used to select the CVBS, RGB and blanking signals from either AV2 (when HIGH) or AV4 (when LOW) to go to I501. Analogue switches I302, I303 and I304 make the selection of these signals.

S1/AV3 Output Connection

Pin 3 is used to select the CVBS/Y, and chrominance signals from either AV1 (when HIGH) or AV3 (when LOW) to go to I501. Analogue switch I302 makes the selection of these signals.

External Blanking Output Connection

Pin 2 is the external RGB blanking output, needed to switch the external blanking input (pin 29) of the I501 into full-screen blanking mode. This mode is activated when the user selects RGB mode for the current AV input. In this instance, the line is HIGH causing the RGB signals on pins 30 to 32 of I501 to have precedence over the picture.

L' Output Connection

Pin 1 is the L' output needed to switch SAW filters for L' operation. This line is normally HIGH and goes LOW when system L is selected and the frequency is within the range for L' operation.

BG Output Connection

Pin 15 is the BG output needed to switch sound traps filters for BG operation. This line is normally LOW and goes HIGH when system BG is selected.

Shift Register Clear Input (SCLR)

Pin 10 is an active low input necessary for clearing the shift register's data on power-up.

Shift Register Clock Input (SCK)

Pin 11 is the shift register clock input necessary for clocking the data into the device. Each bit of data is latched into the device, on the rising edge of the clock. This clock originates from SCL I^2C line.

Register Clock Input (RCK)

Pin 12 is the register clock input necessary for latching the data to the output pins. On the rising edge of this pin, all 8 latched bits are transferred to the output pins.

Output Enable Input (G)

Pin 13 is an active low input necessary for enabling the output ports. This pin is always connected to ground to enable the outputs.

Shift Data Input

Pin 14 is the shift data input necessary for transferring the 8 data bits into the device. The state of this line is latched into the device on the rising edge of SCK.

DIAGNOSTIC FAULT CODES.

Below is a summary of supported fault codes on the A20 chassis.

Code	Name	Likely Cause
0000	Watchdog reset	The microprocessor was reset due to the internal watchdog. Most likely caused by electrical disturbance.
0001	Power good line fault	Power good line going inactive for 3 cycles when the TV is not in standby and subsequently going active within 500mS.
0002	Protection line fault	Protection line going low for >100mS while the TV is not in standby.
0003	Horizontal stage failure	Missing horizontal sync pulse at micro input for > 2 line periods.
0004	Vertical stage failure	Missing vertical sync pulse at micro input for > 2 frame periods.
0005	Black Current failure	Black current not stabilised for >12 seconds. (Detected by TDA8879.)
0006	I2C timeout	A short circuit to ground was detected on either SDA or SCL line for > 40mS
0007	Failure to power up 3 times	This will be set by other faults.
000c	DTT fan failure	(digital models only) Fan failure line held low for >5S
000f	Menu data EEPROM corruption detected.	An EEPROM menu data value was outside of limits. Caused by EEPROM data corruption.
0010	Failure of second PSU	The second power supply failed to start up after 10 seconds on power up.
013a	MAS3528 I2C failure	(Dolby Digital models only) MAS3528 fails to acknowledge I2C communications. This code is set after 3 attempts and power good and protection lines are normal.
0180	DPL4519 I2C failure	(Dolby Digital models only) DPL4519 fails to acknowledge I2C communications. This code is set after 3 attempts and power good and protection lines are normal.
0184	MSP3410/MSP4450 I2C failure	MSP3410/MSP4450 fails to acknowledge I2C communications. This code is set after 3 attempts and power good and protection lines are normal.
018A	TDA8879 I2C failure	TDA8879 fails to acknowledge I2C communications. This code is set after 3 attempts and power good and protection lines are normal.
01c0	Tuner module failed to respond on I2C	Tuner fails to acknowledge I2C communications. This code is set after 3 attempts and power good and protection lines are normal.
023a	Power on reset detected for MAS3528	(Dolby Digital models only) A reset was detected for the MAS3528 device. This code is set after 3 attempts and power good and protection lines are normal.
0280	Power on reset detected for DPL4519	(Dolby Digital models only) A reset was detected for the DPL4519 device. This code is set after 3 attempts and power good and protection lines are normal.
0284	Power on reset detected for MSP3410/MSP4450	A reset was detected for the MSP3410/MSP4450 device. This code is set after 3 attempts and power good and protection lines are normal.
028A	Power on reset detected for TDA8879	POR bit of TDA8879 device set in normal operation. This code is set after 3 attempts and power good and protection lines are normal.
0300	DTT module general failure	(DTT models only) Failure of DTT communications for 3 minutes.
0301-030F	DTT module faults	(DTT models only) As reported by DTT module

SERVICE MENUS.

Below is a table of the service mode menu abbreviations and meanings.

SVC		
TUN	Selects tuner menu.	
VER	Selects vertical menu.	
HOR	Selects horizontal menu.	
WHI	Selects white point menu.	
OPT	Selects general options menu.	
HOT	Selects hotel options menu.	
E2	Selects E2 setup menu.	
TUN		
ADC	Displayed reading of tuner AGC voltage. Used during AGC takeover adjustment.	
OPT	General options for tuner. These are	
	Bit	Meaning
	7	1=VHF operation enabled, 0=UHF only
	6	1=System I operation only, 0=System BG, L, DK, I supported.
	5	Not used
	4	Not used
	3	Not used
	2	Not used
	1	Not used
	0	Not used
AGC	Setting for AGC takeover point.	
VER		
SBL	Service blanking on/off control. Used for setting VSL.	
FLG	Flags for aspect ratio setting. Refer to alignment spec for correct values.	
VSL	Vertical Slope control.	
AMP	Vertical Amplitude Control. This is different for each ratio.	
SC	S Correction Control. This is different for each ratio.	
VSH	Vertical Shift Control.	
VZM	Vertical Zoom Control. This is different for each ratio.	
VSC	Vertical Scroll Control. This is different for each ratio.	
HOR		
HSH	Horizontal Shift Control. This is different for each ratio.	
WID	Horizontal width Control. This is different for each ratio.	
PAR	Horizontal Parabola Control. This is different for each ratio.	
TRA	Horizontal Trapezium Control.	
PLL	Horizontal Parallelogram Control.	
UCC	Upper Corner Correction Control. This is different for each ratio.	
LCC	Lower Corner Correction Control. This is different for each ratio.	
BOW	Horizontal Bow Control.	
WHI		
WPR	White Point Red gain setting.	
WPG	White Point Green gain setting.	
WPB	White Point Blue gain setting.	
CTH	Cathode voltage setting. Range is 0 (55V) to 15 (95V)	
OPT		
MN	Model name entry.	
OB0	Option Byte 0 (General options for TV). These bits are	
	Bit	Meaning
	7	1 = DTT module is fitted
	6	1 = Multi Language TV (country and language options are shown)
	5	1 = VPS station identification is enabled.
	4	1 = TOP text is enabled.

	3	1 = Scart 4 is fitted.
	2	1 = Rotation control is enabled
	1	1 = compress relay is fitted
	0	1 = Use alternate OSD colours (adjust to ensure correct OSD colours)
OB1	Option byte 1. These bits are	
	Bit	Meaning
	7	1 = inhibit PWM function (used on 32 inch models)
	6	1 = inhibit decoding of WSS signal
	5-0	Not used at present
RGB	Horizontal shift offset in RGB mode. (A value of 16 is no offset.)	
OSH	OSD horizontal position control.	
OSV	OSD vertical position control.	
HOT		
OPT	Hotel Option Byte. The bits of this are	
	Bit	Meaning
	7	1 = Hotel mode on. When zero, none of the other bits has any effect.
	6	1 = No standby. TV always powers up when mains is first connected.
	5	1 = User cannot access any of the menus.
	4	1 = Maximum volume control is active.
	3	1 = TV powers up to the program number given by PRG.
	2	Not used
	1	Not used
	0	Not used
VOL	Maximum volume in hotel mode (enabled by bit 4 of OPT byte).	
PRG	Initial programme in hotel mode (enabled by bit 3 of OPT byte).	
E2		
E2R	EEPROM reset. Resets all EEPROM data to the initial settings.	
E2F	EEPROM factory setting. Resets programmes and user settings.	
E2S	EEPROM shipping. Resets programmes and user settings, sets installation flag and exits service mode.	
CLF	Clear Faults. Resets all fault information to zero.	
EXS	Exit service mode.	

TUNER AND VIDEO IF STAGE

The tuner U101, is a frequency synthesis type with a balanced I.F. output of 38.9MHz. Power is supplied from the +5V rail to pin 7 of the tuner. The +33V tuning voltage (pin 9) is provided from the +48V frame flyback pulse generator via R725 stabilised by Z205 then through R259.
Direct frequency access, channel selection, AGC and AFC functions are controlled via the I^2C bus. Pin 1 is the AGC input and is connected to pin 54 of I501, (Video/Chroma Input Processor) via R282 and R265. AGC and Band Switching controls may be selected by entering the service menu and selecting the 'TUN' option; AFC is set automatically. The AGC voltage at pin 1 is also fed to an ADC input of the micro (pin 17), via I304 input at pin 1 and output at pin 15, and is displayed in 'ADC' in 'TUN' of the service menu. Pins 2 & 8 are not connected, pin 3 is the I^2C address select, which is grounded via R261. Pin 6 is tied to the +5V supply, NC. Pin 4 is the I^2C Clock and pin 5 is the I^2C Data line. Pins 10 & 11 are the balanced IF outputs fed to pins 1 & 2 of X219, the vision SAW filter, while 1 and 3 of T200, sound IF transformer, or via a screened lead to R271.
The outputs from pins 4 & 5 of X219 are applied to pins 48 and 49 of I501, the vision IF inputs. The IF signal is then demodulated in I501 and the composite video signal is output at pin 6, 2Vp-p, which is applied to the base of Q505 via R560. CL models use a SECAM signal, I501 is switched for positive modulation via the I^2C bus. This is selected in the manual tuning option the install menu.

EXTERNAL VIDEO INPUTS / OUTPUTS

The TV processor I501 has one input for internal CVBS signal and two inputs for external CVBS or Y signals, however it only has one chroma input so it is not possible to apply two separate Y/C inputs.

Video switching functions are carried out in IC501 which is controlled by the I^2C bus and in analogue multiplexes I302, I303 and I304, controlled by pins 3 and 4 of I003, (the Microcontroller).
The CVBS at the emitter of Q505 is applied to a 5.5MHz sound trap (CL model only), F501, via R541 which in turn is applied to the base of Q507. The CVBS at the emitter of Q507 is output at pin 19 of SCART 1 and applied to pin 13 of I501 via R539 and C581. The video signal at SCART 1 is derived from the signal received by the tuner and is independent of the picture displayed.
SCART 1 has CVBS input and output and luminance & chrominance inputs. The video signal at pin 20 of SCART 1 is applied to pin 11 of I501 via analogue switch I302, pins 1 and 15, which is switched when pin 10 is high, (3.3V). Luminance and chrominance signals are input at pins 20 and 15 of SCART 1 respectively. The luminance signal is applied to pin 11 of I501 as above and the chrominance is applied to pin 10 of I501 via analogue switch I302, pins 13 and 14, which is switched when pin 11 is high.
SCART 2 has CVBS inputs, output and RGB input. CVBS input at pin 20 of SCART 2 is applied to pin 17 of I501 via analogue switch I302, pins 3 and 4, which is switched when pin 9 is high. The CVBS output at pin 19 of SCART 2 is provided from pin 38 of I501 via R546 and Q508; this is switched by the I^2C bus and is identical to the picture on screen. RGB inputs on pins 15, 11 and 7 respectively of SCART 2 are switched by analogue switch I303. This device switches the RGB inputs to pins 32, 30 and 31 respectively, of I501, between SCART 2 and SCART 4; or SCART 2 and the DDT module on DDT models. When pins 9, 10 and 11 of I303 are high, the RGB signals are applied from SCART 2; else they are applied from SCART 4/DDT. RGB Blanking is switched between SCART 2 and SCART 4/DDT by I304, pins 3, 4 and 5. When pin 9 of I304 is high SCART 2 is selected, else SCART 4 is selected.
SCART 4 has a CVBS input but no CVBS output, and RGB inputs. The RGB input functions in the same way as SCART 2, as described above. The CVBS input at pin 20 of SCART 4 is applied to 17 of I501 via analogue switch I302, pins 4 and 5, switched when pin 9 is low.
Note, for DDT models SCART 4 is not fitted and the CVBS signal from DDT module is applied to pin 5 of I302.
SCART 3, front AV3, is used for S-VHS input having separate luminance & chrominance signals and CVBS. Analogue switch I302 switches the source of the luminance & chrominance signals to I501 pins 11 and 10, from SCART 1 to AV3. This happens when pin 10 and 11 of I302 are low. The CVBS input at front AV3 phono socket is applied to pin 11 of I501 via I302, pins 2 and 15, switched when pins 10 and 11 of I302 are low.
The DDT module has two CVBS outputs and one RGB output, some of which have been discussed. The R, G and B outputs are used for picture content and CVBS OUT1, applied at pin 3 of lead header PL2, is used for sync purposes. CVBS DT2 is applied to pin 5 of LP2 and in turn pin 5 of I302, only when material viewed by the digital module is not right protected. Thus, protected material is not output at SCART 2.

The CVBS output at pin 38 of I501 is also input at pin 12 of I003, (Microcontroller,) for Teletext, VPS and WSS slicing, via Q509. Pins 23, 24 and 25 are the RGB inputs of I501 used for OSD and teletext display.
The final video signal is output from I501 as RGB on pins 21, 20 and 19 respectively. These signals are applied to the CRT base via R534, R535 and R536.

Video/Chroma TV Input Processor - Philips TDA8879

The TDA8879 is a multi-standard I^2C bus controlled TV processor. It contains integrated sound trap circuits, switchable group delay correction, multi-standard colour decoder with switchable colour filters and delay line and various picture improvement features including:
Video dependent coring. The coring can be activated only in the low-light parts of the screen. This effectively reduces noise while having maximum peaking in the bright parts of the picture.
Colour Transient Improvement (CTI). This circuit improves the rise and fall times of colour difference signals. The function is realised by using delay cells with a length of 300ns.
Black-stretch. This circuit corrects the black level for incoming video signals that have a deviation between the black level and blanking level. The time constant for the black stretcher is realised internally.
Blue-stretch. This circuit is intended to shift colour near 'white' with sufficient contrast values towards more blue to obtain a brighter impression of the picture.
White-stretch. This function adapts the transfer characteristic of the luminance amplifier in a non-linear way dependent on the picture content. The system operates such that maximum stretching is obtained when signals with a low video level are received. For brighter a picture the stretching is not active.
Dynamic Skin Tone control (DST). This function is realised on the YUV signals by detecting the colours near to skin tone. The correction angle is controlled via the I^2C bus.
Video dependent coring and peaking, CTI, Black-Stretch and DST can be turned on and off by selecting the 'more' option in the 'picture' menu. Video dependent coring and peaking is listed as 'noise reduction'. White-stretch is pertinently turned on and Blue-stretch is turned off. In addition to these features, picture 'tint' can be altered in the 'more' option of the 'picture' menu. This adjusts the gain offsets of the red, green and blue amplifiers to produce a cooler or warmer picture.

CRT BASE

Output Amplifier

One chip RGB amplifier (IC801) device is used for RGB output stage in CRT base. The RGB signals are fed into pin 1,2,3 of IC801. And the pins 7,8,9 are output for cathode. The gain of the RGB amplifier is defined as 50 times. The pin 5 of IC801 feed back into pin 18 of I501. And pin 6 of IC801 is connected to 200V power supply.
The RGB input signals of I801 have amplitude of around 2V black-to-white at nominal settings. The RGB output from I801 have amplitude of around 2*50=100V black to white at nominal settings. The required white point setting of the picture tube is implemented by 3 separate gain settings for the RGB channels. To obtain an accurate biasing of the tube, a continuous cathode calibration circuit is implemented by means of a two-point black level stabilisation circuit. By inserting 2 test levels for each gun and comparing the resulting cathode currents with two different reference currents the influence of the picture tube parameters like the spread in cut-off voltage can be eliminated.

Scan Velocity Modulation.

During transmission, the signal suffers from degradation and due to the frequency characteristics of the television circuitry. This normally results in a gentle rise or fall in the luminance change areas when black-to-white-to-black patterns are received.
The picture sharpness quality can be assessed by how steep the leading and trailing edges are. The scan velocity modulation circuit has been designed to improve picture quality, i.e. make the video signal edges steeper, by controlling the horizontal scanning velocity of the electron beam in the CRT.
The velocity modulation circuit produces a compensation signal by adding the RGB components then differentiating. The compensation signal is given some current gain, applied to the auxiliary coil (connector E805) on the neck of the cathode ray tube (CRT).
The VM circuit is located on the bottom side of the CRT base along with the final RGB amplifiers. The RGB signals derive from P802 pins 2-4 and into emitter of Q861, through the differentiator C865, R892 arriving at the base of Q865 for voltage amplification and latter stages, power gain. Final VM pulses arrive at E806 to VM coil around tube neck

Audio Circuit

The output from the Tuner U101 is fed to Sound IF stage in one of two ways: -
1) Using a shielded lead, with one side of the balanced output used
Or
2) Using a surface mount transformer (T200) to make the balanced output single ended
Either way the signal is passed via a gain and buffer stage formed by Q216 and Q217 to the Saw Filter X200. The saw filter has two separate characteristics depending on which of the two inputs (on pin 1 and 2 of the Saw Filter) the signal is applied to. Selection is achieved by the combination of Q212 and Q213. For most standards, pin 2 is selected. However, when an L' Signal has been selected, the micro (I003) takes pin 1 of I004 low. When this happens Q212 switches off thus taking pin 1 high and switching Q213 on. This means that the collector of Q213 goes low switching D209 off.
The signal on Pin 2 is thus removed and is instead applied to pin 1 via D208, which is now conducting. To return to other broadcast standards, pin 1 of I004 is obviously returned to the high condition.
The output of the Saw is applied to pins 56 and 55 of I501. Here the Signal is transformed from the 1st IF (30 – 40 MHz depending on transmission standard) to the sound IF (5.5 to 6.5 MHz depending on the transmission standard).
I501 also provides AM demodulation for the L' and L standards. The demodulated signal appears on the Sound IF on pin 15 where, after some low pass filtering it is applied to pin 55 of I401.
The sound IF appears at pin 2 of I501. The signal passes through an amplifier and buffer stage formed by Q401and Q402 after which some high pass filtering is applied by C458 and R494 before the sound IF is applied to pin 60 of I401 via C457.
I401 is The MSP3410D. This IC provides Nicam, FM Mono and FM Stereo Demodulation as well as matrixing of the scart / digital receiver signals (If Fitted).
The AV1 input is applied on pins 52 and 53, the AV2 input on pins 49 and 50, the AV3 input on pins 46 and 47. The AV4 signals (or the Digital input on DTT Models) are applied to pins 43 and 44. In Each case a 100R resistor and 330n capacitor is used.
The Scart outputs on I401 use the following protocol.

Scart Output	Output Signal	
	Non Digital Models	DTT Models
AV1	RF	Digital
AV2	Monitor*	Monitor*
AV3	No Output	No Output
AV4	No Output	Not Fitted

* Monitor means that the output at AV2 follows the audio of the source being watched.

The device is I2C Controlled via pins 9 and 10 and receives a reset from the micro at power up on pin 24.The clock is provided by X412 on pins 62 and 63. The device has three supply rails, 5V Digital (Pin 18), 5v Analogue (Pin 57), and 8v Analogue (Pin 39).

Op-amp stage

Depending on the Type of model Stereo, Dolby Virtual, DolbyPro-Logic and Dolby Digital.
The audio outputs from the I401 are given gain by two Op-amps, I402 and I403. These are four way and two-way devices respectfully. These allow a number of options. In all case's, the signal from the MSP (Or Dolby Digital Sub-board) has some filtering applied by a 1nf capacitor to ground before being passed to the Op-amp by a 100R resistor. The gain is set by a feedback circuit consisting of two resistors.
The signals are then passed to a pnp emitter follower stage before being AC coupled and having some filtering applied. The signals then appear at the phono socket(s) Phono1 / phono2
Muting of the phono outputs is possible by taking the GMUTE line from the Micro I003 (via transistor Q011) High, and thus pulling the outputs low via the NPN transistor situated at all 6 possible phono output paths.

Stereo/Dolby Virtual Models

Here either an MSP3410 (stereo) or an MSP3411 (Dolby Virtual) is fitted. In the case of the Dolby virtual model, when Dolby Virtual is selected using the special key on the remote control, the centre and surround channel is extracted from the incoming signal within the MSP3411and encoded onto the left and right channels using a special algorithm
The operation of the virtualiser is of course dependent on a suitable Dolby Surround encoded source, be it via an AV socket, Nicam, or A2 stereo signal being selected.

A single 2 way Op-amp is fitted in position I403 and gives approximately 3 dB gain to each of the channels. Two emitter followers for the left and right channels are fitted, QS61 and QS44, along with a 2 way Phono socket in position Phono2
Muting is performed via the mute line 'Gmute' and QS60 and QS40

Dolby Pro Logic Models

Here the MSP3410/MSP3411 is replaced with the MSP3412. This is a Dolby Pro Logic Decoding IC.
Its function is similar to that of the MSP3411 except for the following outputs, and the availability of Pro-Logic mode:-
Pin 30 Centre
Pin 32 Surround
In place of Dolby virtual mode, Hitachi 3DS is made available. This can be selected by pressing a special key on the handset.
Dolby Pro logic is selected using the on screen menus.
At the Op Amp stage, I403 is removed and a single 4 way device is fitted in position I402 and gives approximately 3 dB gain to each of the four channels.
Two extra emitter followers for the centre/surround channels are also fitted, QS51 and QS17, along with a 4 way Phono socket in position Phono2
Muting of the extra audio channels is carried out as before with two additional transistors QS52 and QS11.

Digital Audio Sub-board

The Digital Audio sub-board takes the form of a horizontal assembly that plugs into the I401 position.
The assembly contains the MSP4450 (I3, a 48KHz version of the MSP3410) , a DPL4519G (I2, a Dolby pro-logic decoding device) and the MAS3528E (I1,the Dolby Digital decoding device.)
The first two devices are in the PQFP style package, while the last is in the PLCC.
X1 on the circuit diagram represents the Original MSP position.
The signals that appear at the MSP position unique to this board are:-

Pin 2 Spdif1
Pin 8 Spdif2
Pin 21 Sub-woofer
Pin 30 Surround Left
Pin 31 Surround Right
Pin 32 centre
The Scart I/O and Reset etc. are exactly the same as described in the previous section, except the signals are routed to the respective pins of the MSP4450.
A single 18.432 MHz Crystal is used to generate all the clocks on the board. It starts on pins 71 and 72 of I3 before being buffered and outputted on pin 74. Here it passes through a coupling capacitor and EMI filter before reaching pin 71 of I2. Here the signal is buffered again and appears at pin 74, where it passes via an EMI filter and coupling capacitor before being applied to pin 9 of I1.
In **Stereo** mode the majority of the chipset is redundant, and all the signal processing takes place within the MSP4450.
In **Dolby Pro-logic** mode the signal is first passed from the MSP in I2S format on pins 4, 5, and 6 to the MAS3528E (pins 19 to 21). This is then passed straight through to the DPL4519G where, if selected, Dolby Pro logic decoding takes place. This device then carries out D to A
Conversion on the Centre channel, which emerges on pin 25 of the device, and also on the mono surround channel which then appears on both pins27 and 28 of the device.
The left and right channels are passed in I2S format via pin 6 to pin 22 of the MSP. The MSP then carries out D to A conversion and they appear at pins 27 and 28
In **Dolby Digital** 5.1 Mode the Digital bitstream is sourced via the main boards SPDIF input situated on Phono2 called 'Digital in'. This is carried via a shielded lead to the plug P400 adjacent to the MSP socket on the main board. It is then carried to the sub board via pin 2 of the MSP position where it finally reaches pin 38 of the MAS3528E. The MAS then carries out Dolby decoding. The decoded channels then appear as an I2S signal on pins 25 to 27 (Clock, Word strobe and data respectfully) before reaching pins 19,20 and 22 of the DPL4519G. This then outputs the surround and centre channels as described before but for the exception of the surround channels carrying 'independent' information (as opposed to being mono with Pro Logic)
The subwoofer channel appears at pin 24.
The left and Right channels are then passed to the MSP for D to A conversion as before.
In the case of Dolby Digital models both Op Amps are fitted, as well as all 6 emitter followers
Both sockets Phono1 and Phono2 are also fitted.

AUDIO AMPLIFIERS

The audio amplifier used on this chassis is a stereo class D unit; it requires both positive and negative power supply rails. The outputs from pins 3 & 23 are square waves with a frequency of approximately 200kHz which are pulse width modulated, these are then filtered by LA04 /CA16 and LA02/CA03. The switching fundamental frequency is not completely removed by the filters but is comparatively small and of a high enough frequency not to be heard.

PIN	FUNCTION	PIN	FUNCTION
1	Negative signal/substrate supply	14	Current setting resistor
2	Negative power supply left	15	Triangular waveform right
3	PWM output left	16	Internal -5V decoupling
4	Positive power supply left	17	Feedback right pin 1
5	Bootstrap left	18	Right signal input
6	Mute/stand by	19	Feedback right pin 2
7	Feedback left pin 1	20	Not connected
8	Oscillator setting pin	21	Bootstrap right
9	Feedback left pin 2	22	Positive power supply right
10	Left signal input	23	PWM output right
11	Triangular waveform left	24	Negative power supply right
12	Internal +5V decoupling	25	Internal 10V regulator
13	Signal ground		

Pin 6 the stand by / Mute line is controlled by the micro-processor I003 via QA01 during power up and power down. When a plug is inserted into the headphone socket HS01 the 17V looped through the headphone socket (pin 9 in, pin 8 out) is removed from pin 8 causing pin 26 of I003 to fall. When I003 sees this low on pin 26 it commands I401 (MSP3410 audio processor) via the I^2C to output a high level from pin 4 which is then applied to the base of QA01 via RA01 and DA03.
The same control path is used when the software option to mute the internal speakers is selected.

Pin 6 function	Voltage range
Stand by range	0 to 0.7V
Mute range	1.7 to 2.5V
Play range	4 to 5V

The headphone output uses it's own amplifier IA04, which is a two channel power amplifier, it does not have a separate volume control or any mute circuits.

Pin	Function	Pin	Function
1	Right output	5	Left input –ve
2	Power supply	6	Left input +ve
3	Left output	7	Right input +ve
4	Ground	8	Right input –ve

The signals for the main amplifier and headphone amplifier are taken from the same right and left outputs of the op-amp stage as the phono outputs.

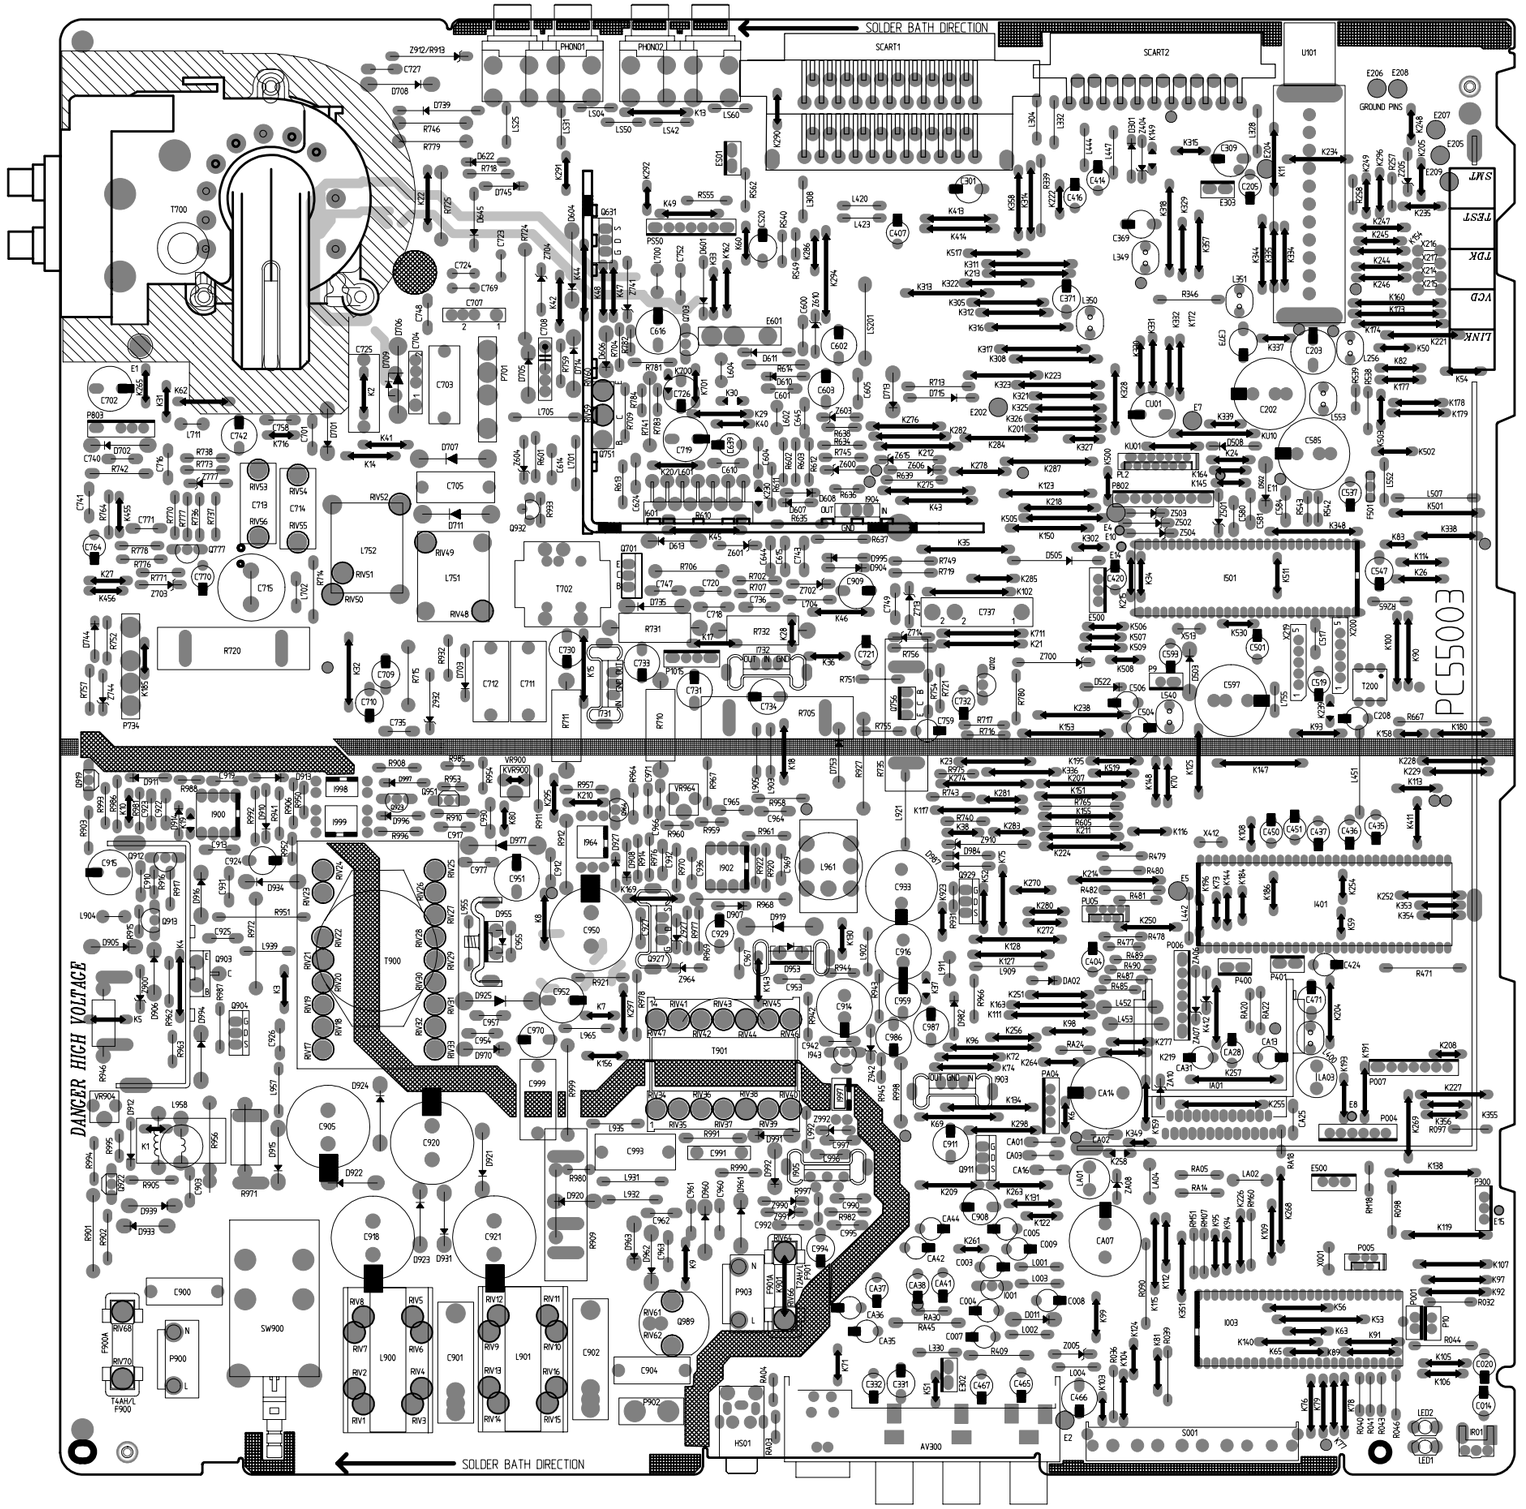

SM00031	A20 MAIN BOARD (COMPONENT SIDE)	HITACHI

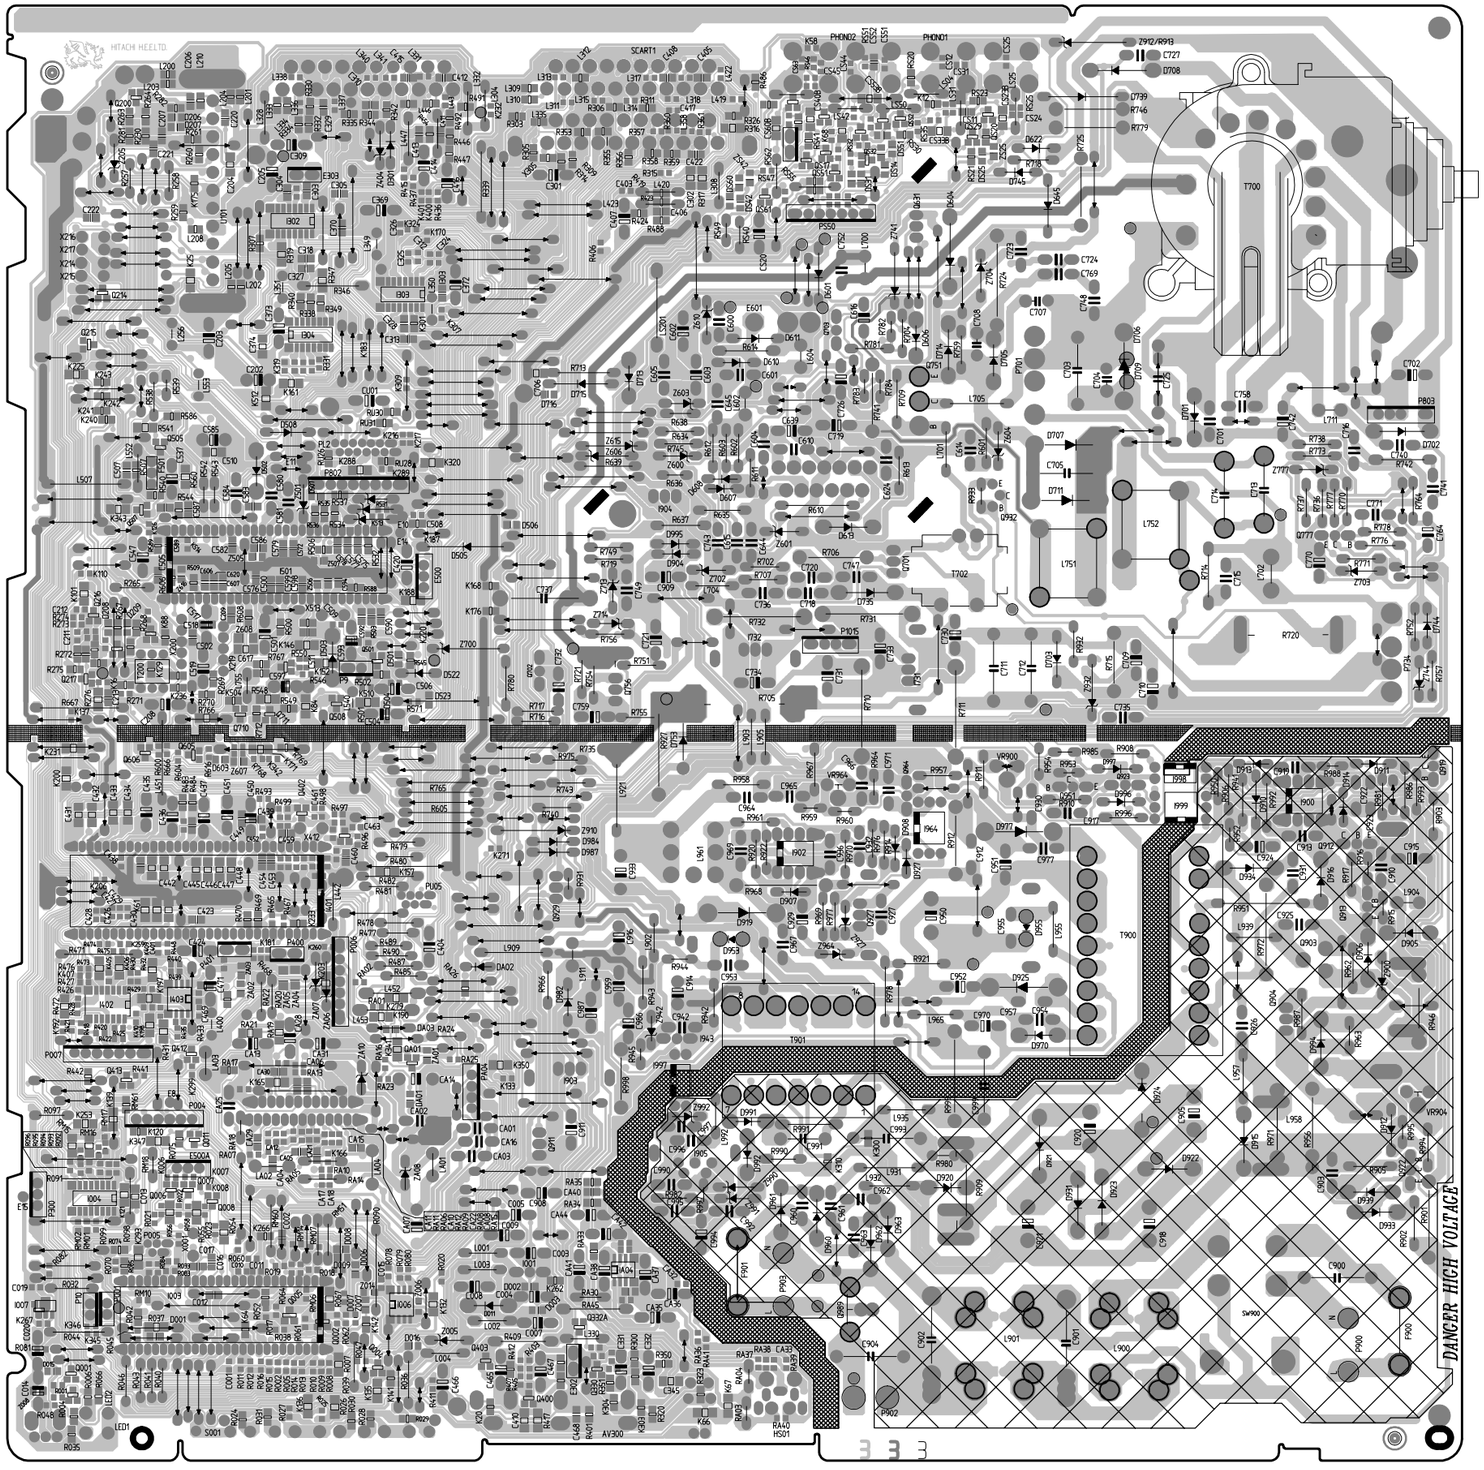

SM00031	A20 MAIN BOARD (SOLDER SIDE)	HITACHI

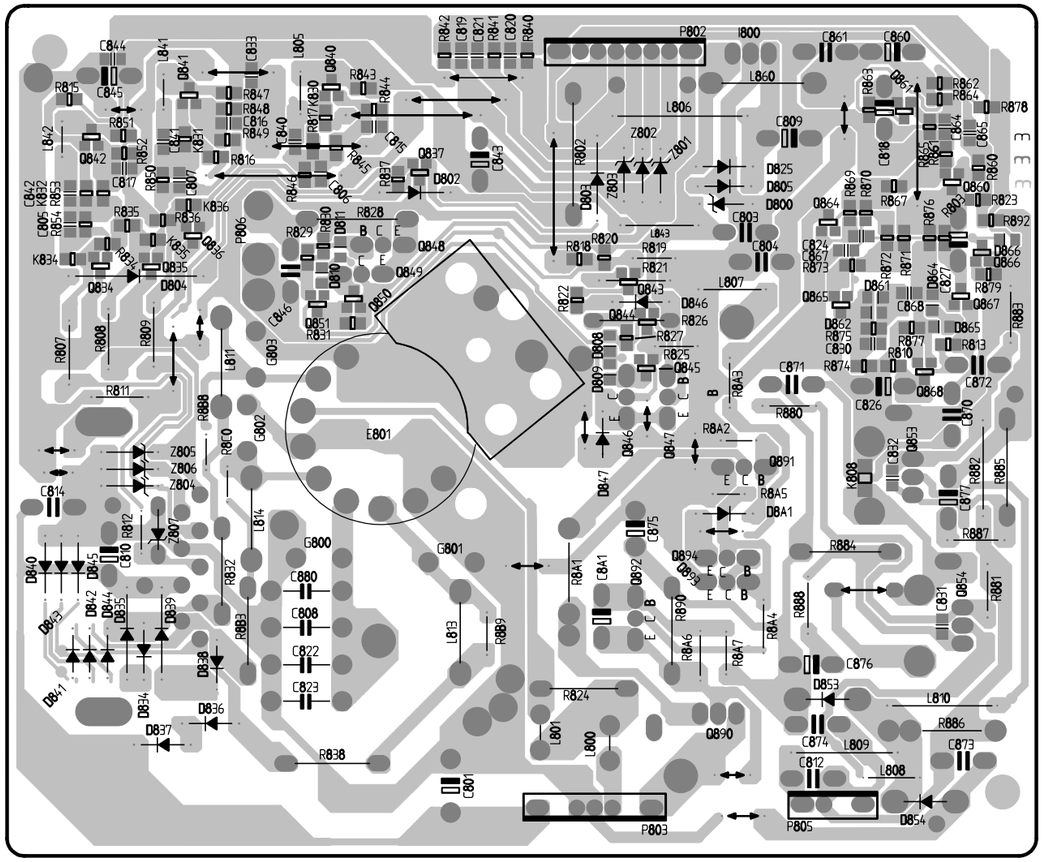

Solder Side

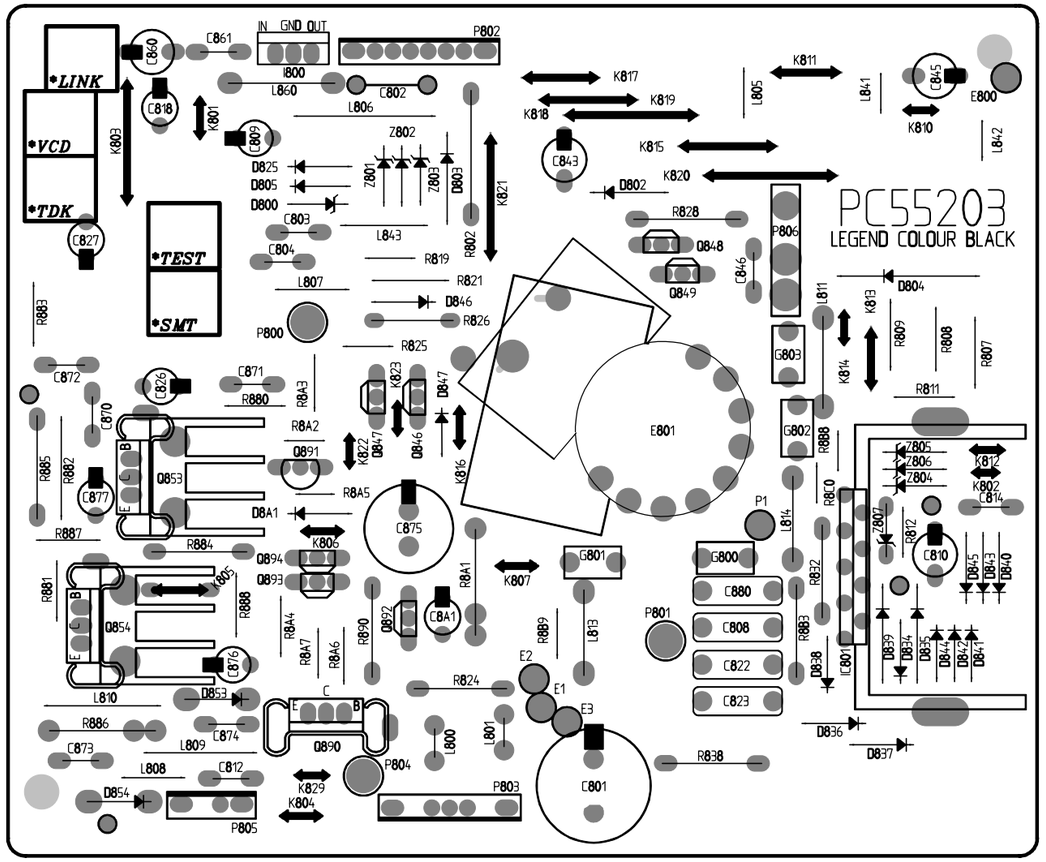

Component Side

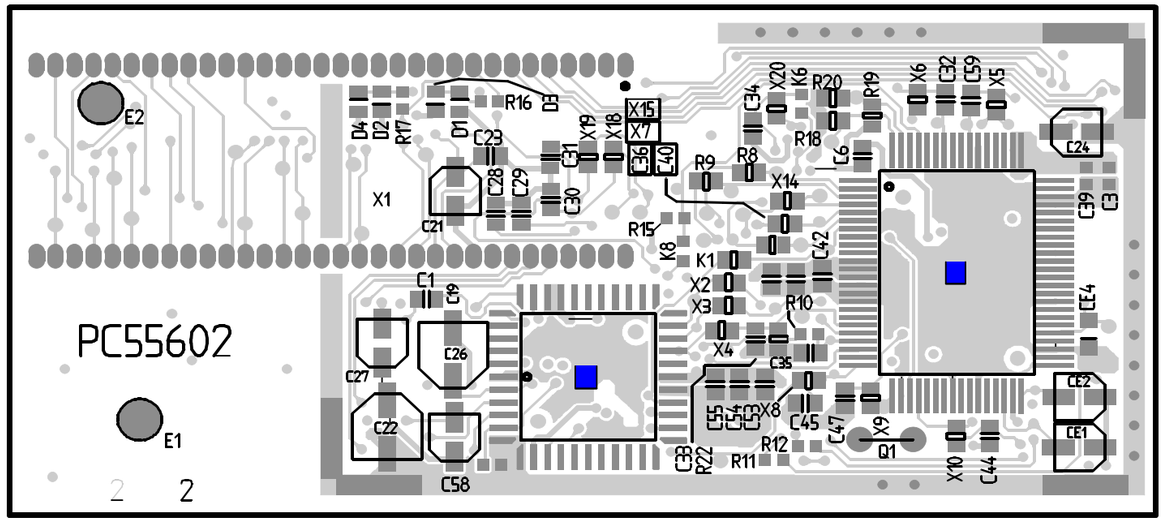

Solder Side

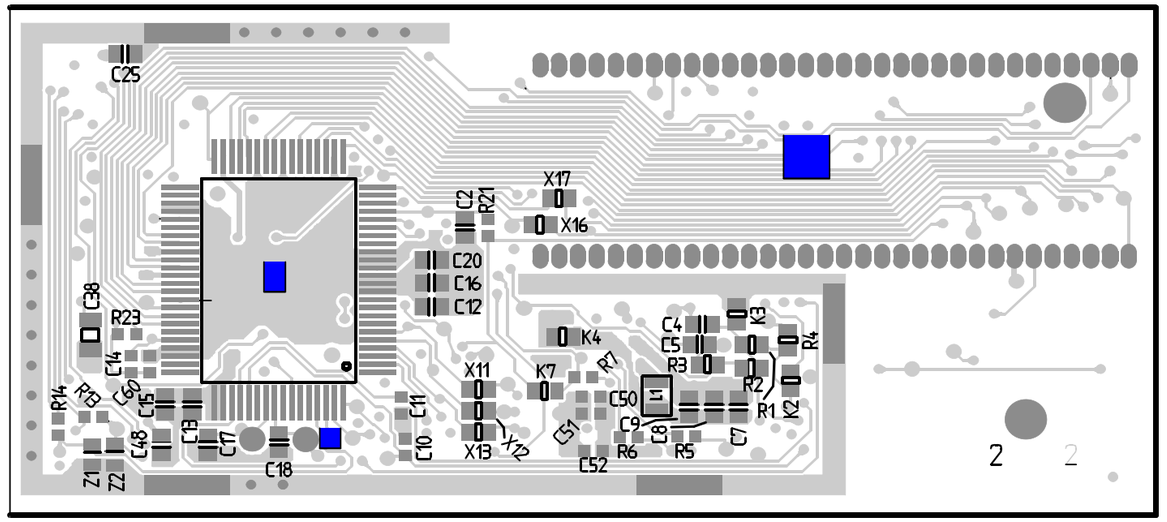

Component Side

SM00031	A20 MSP BOARD	HITACHI

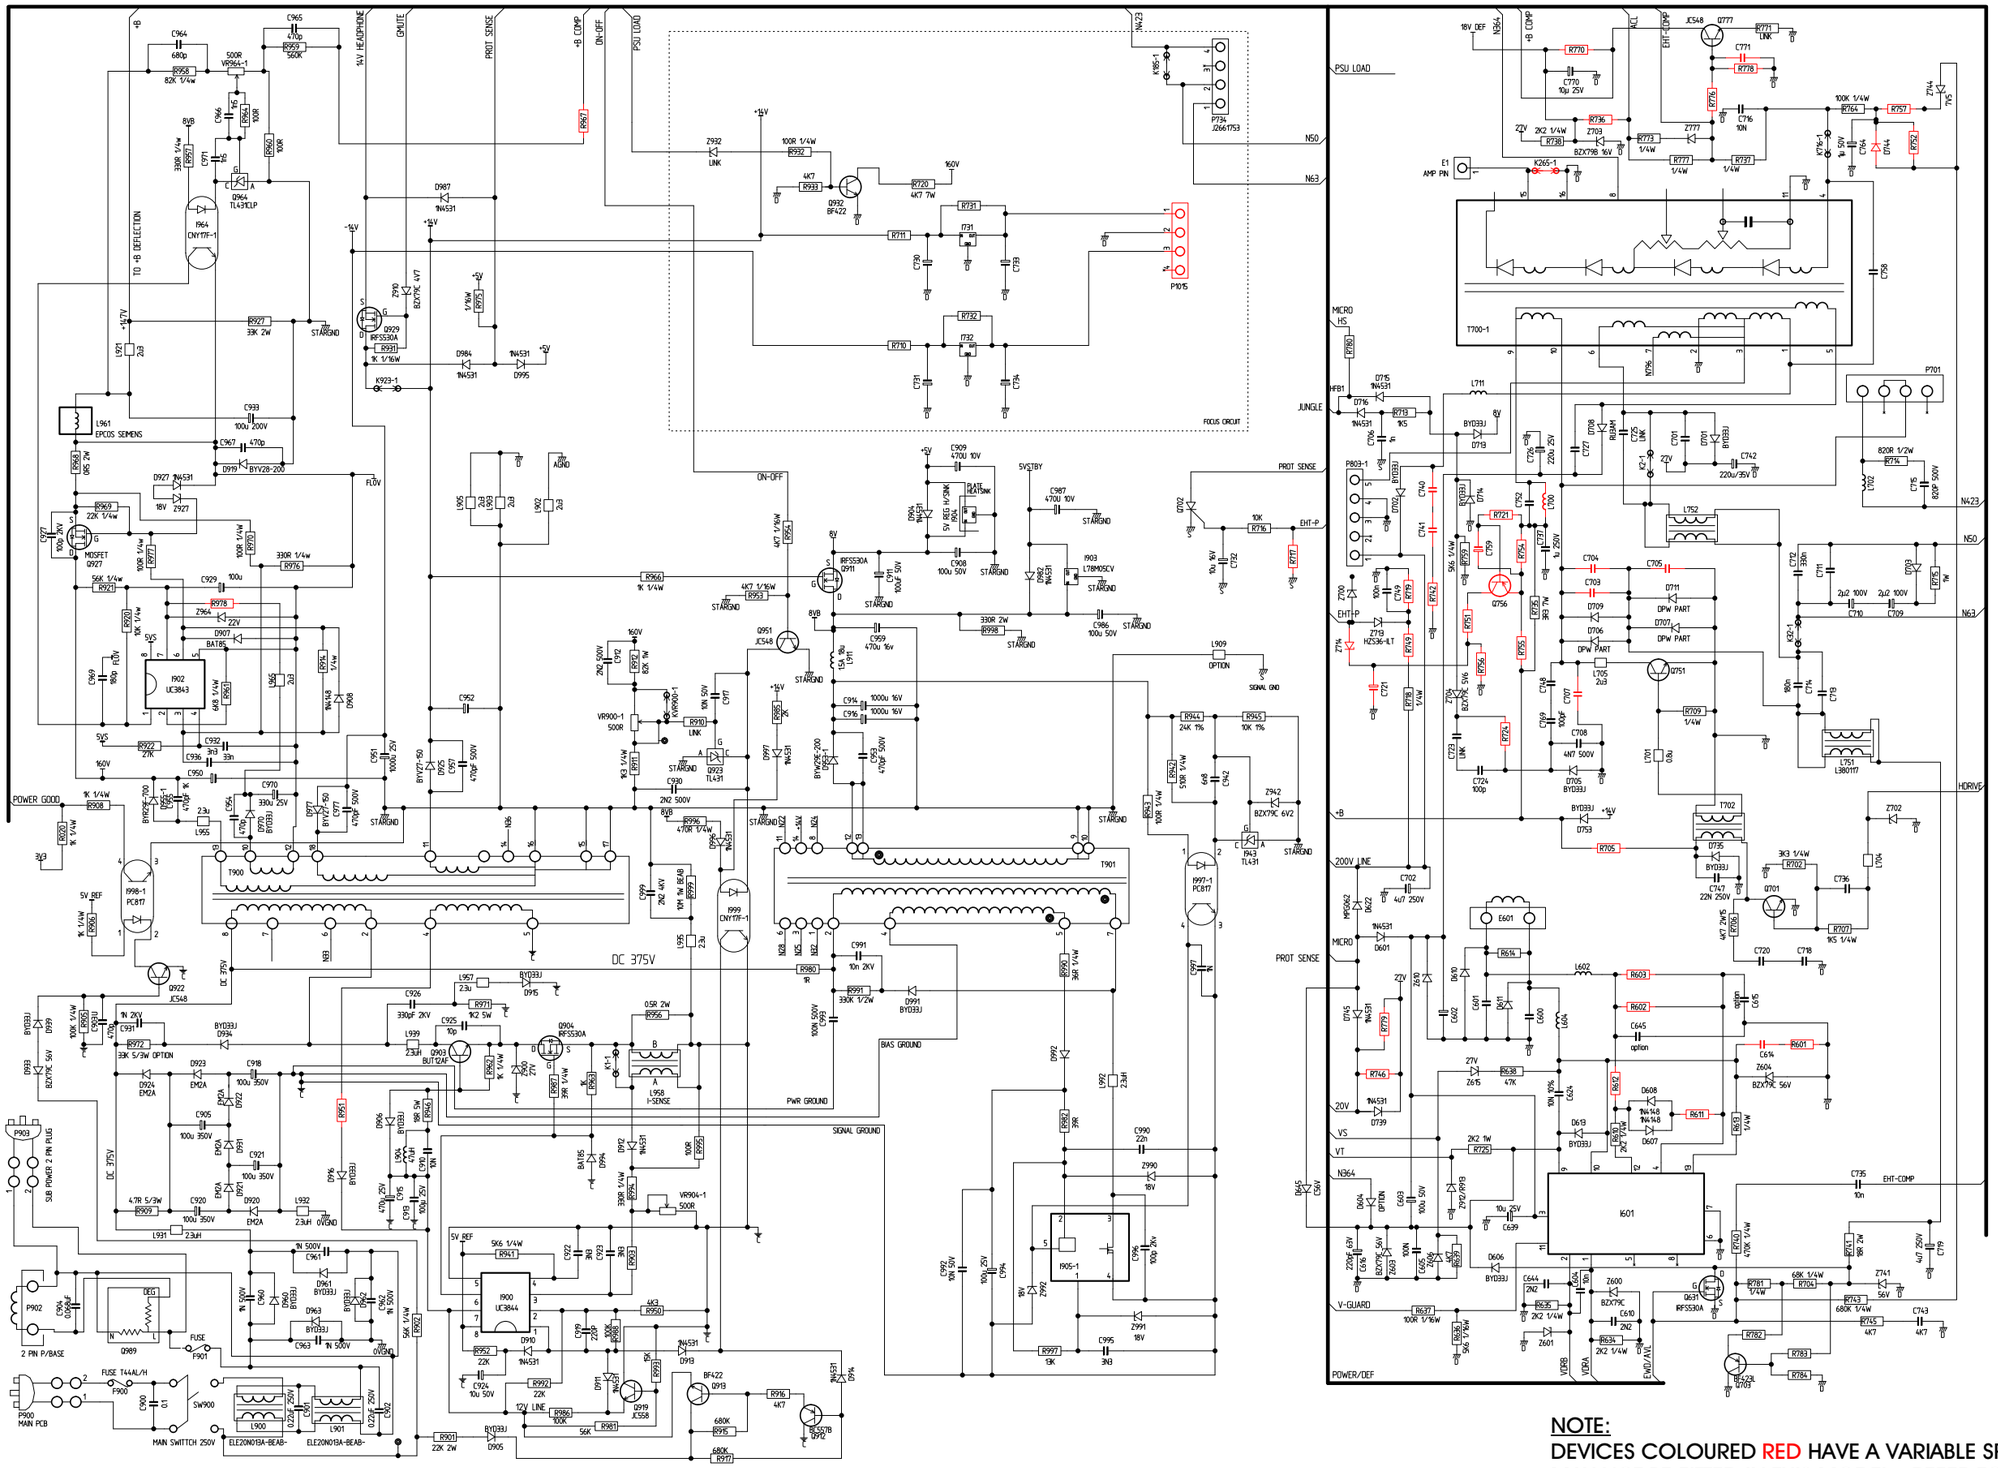

NOTE:
DEVICES COLOURED RED HAVE A VARIABLE SPEC. AND
MAY NOT BE FITTED IN THIS MODEL - REFER TO THE PARTS LIST

SM00031	A20 MAIN BOARD POWER / DEFLECTION CIRCUIT	HITACHI

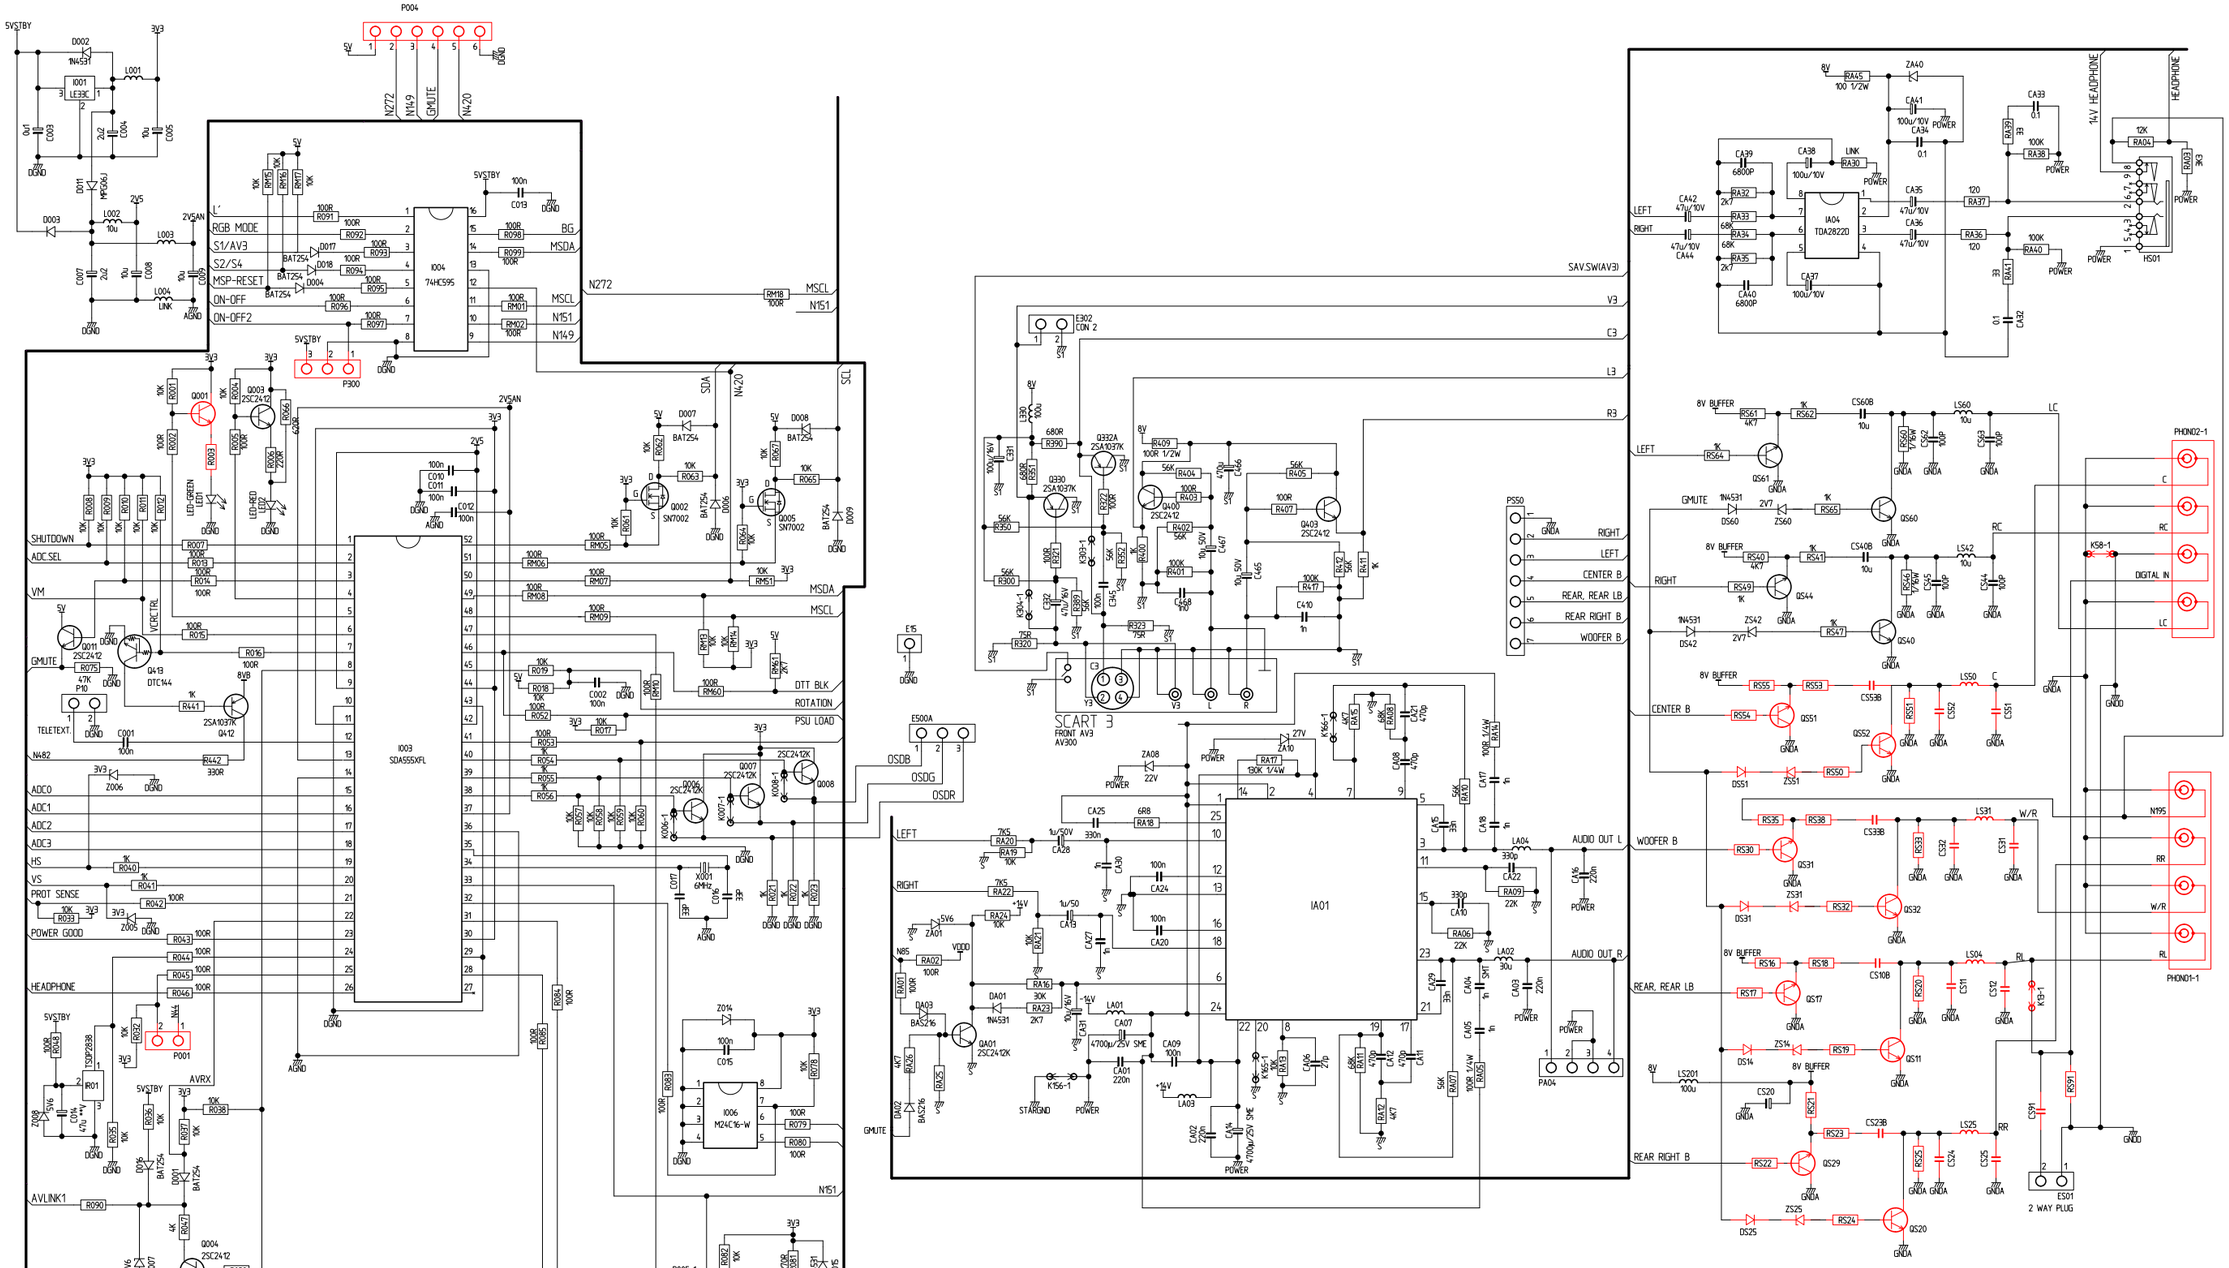

NOTE:
DEVICES COLOURED RED HAVE A VARIABLE SPEC. AND
MAY NOT BE FITTED IN THIS MODEL - REFER TO THE PARTS LIST

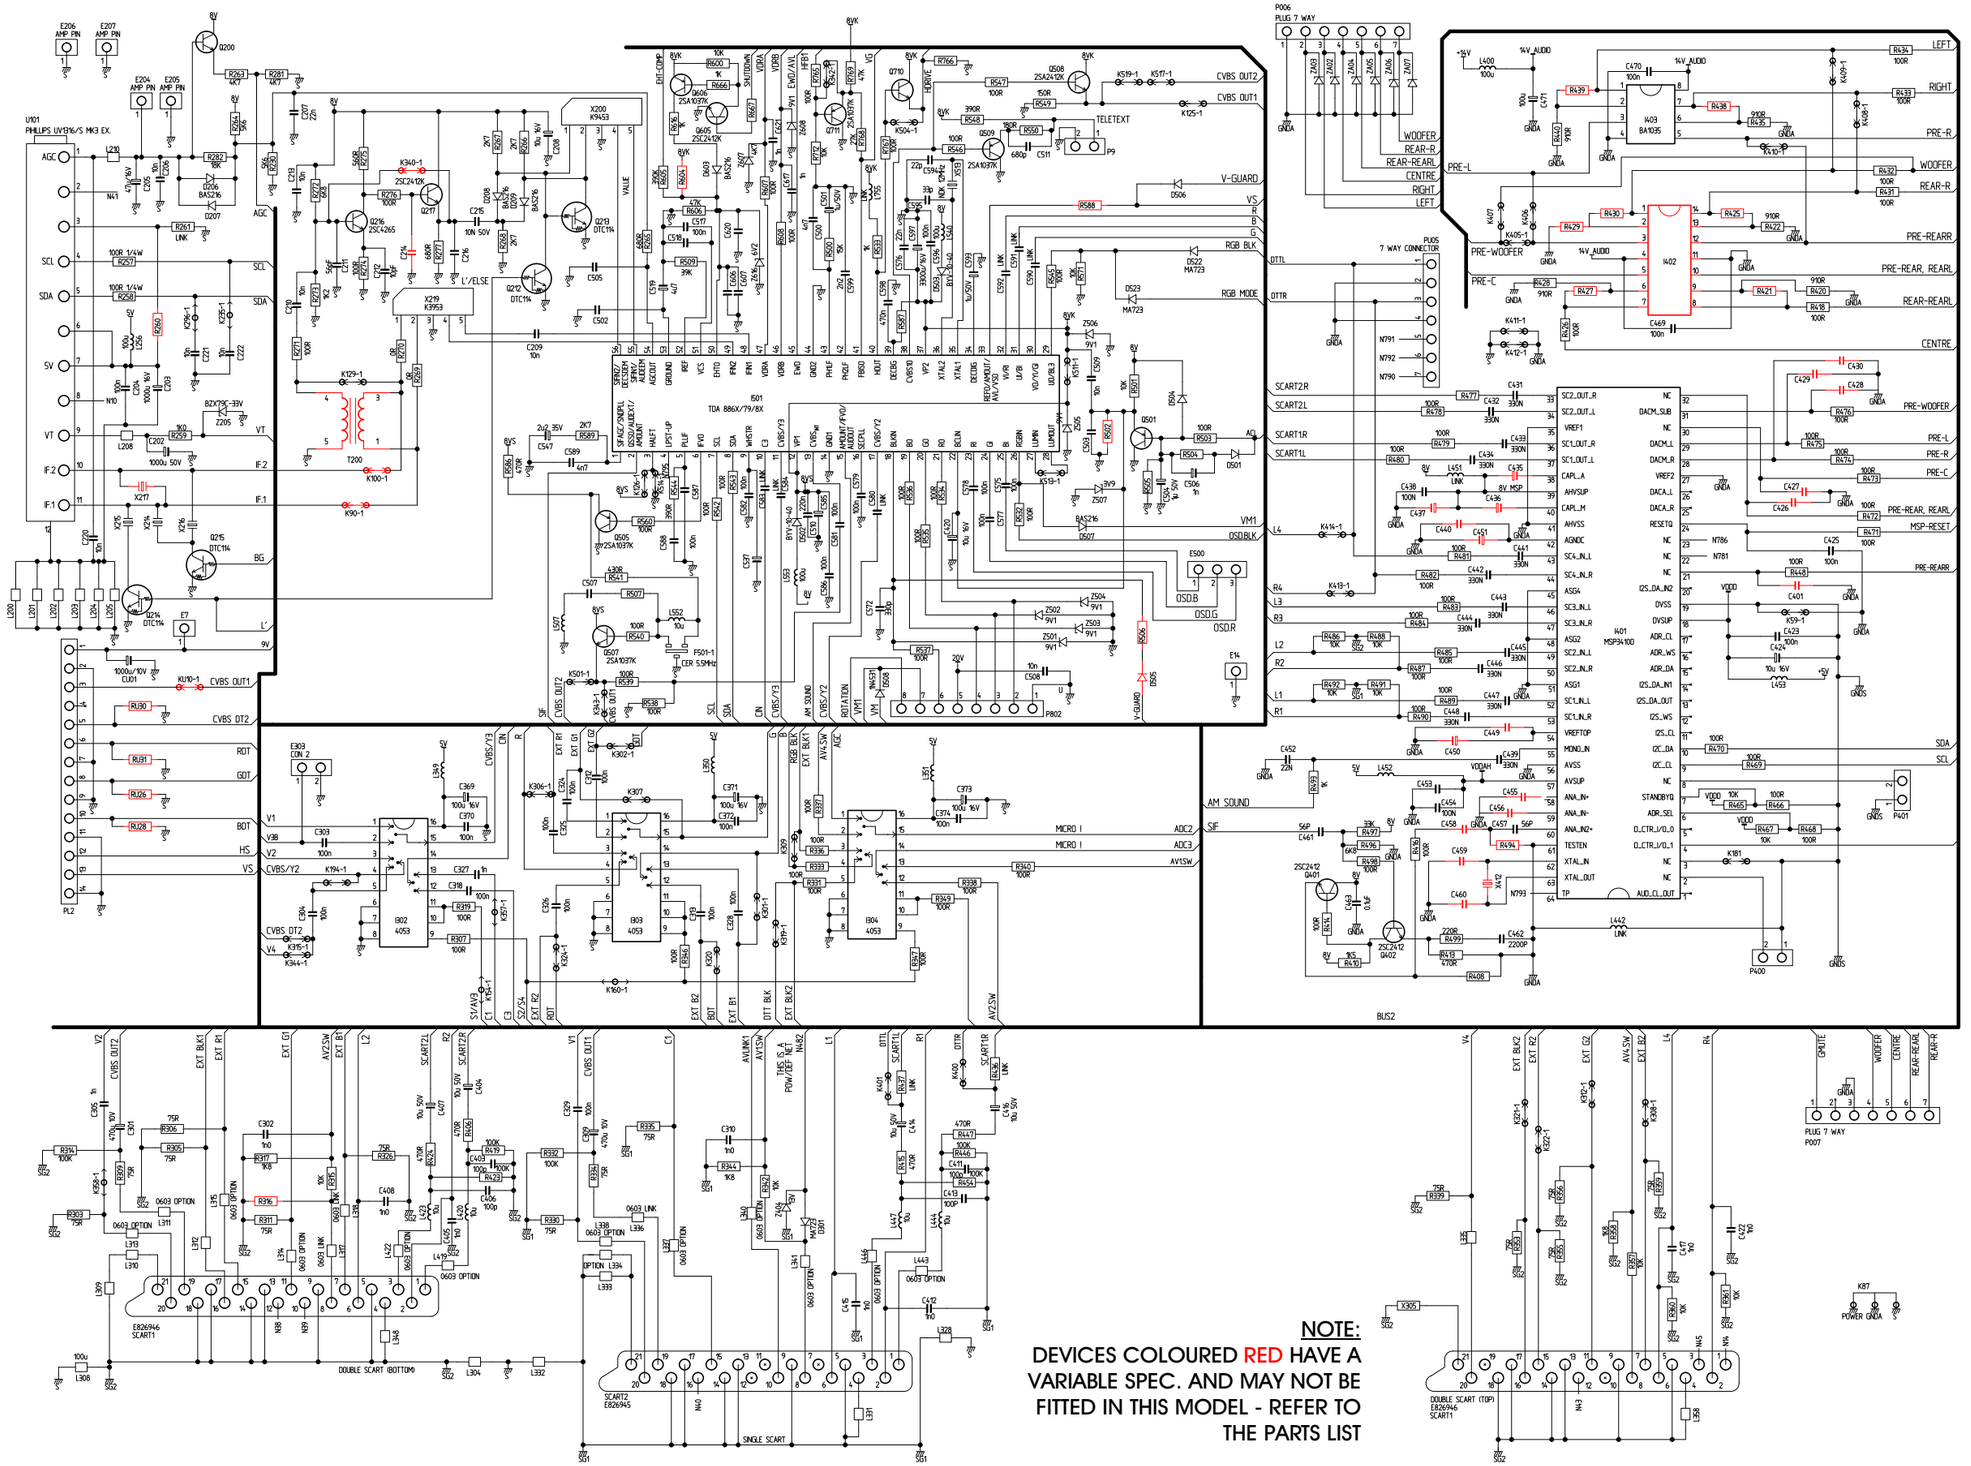

NOTE:
DEVICES COLOURED RED HAVE A VARIABLE SPEC. AND MAY NOT BE FITTED IN THIS MODEL - REFER TO THE PARTS LIST

SM00031	A20 MAIN BOARD SIGNAL CIRCUIT	HITACHI

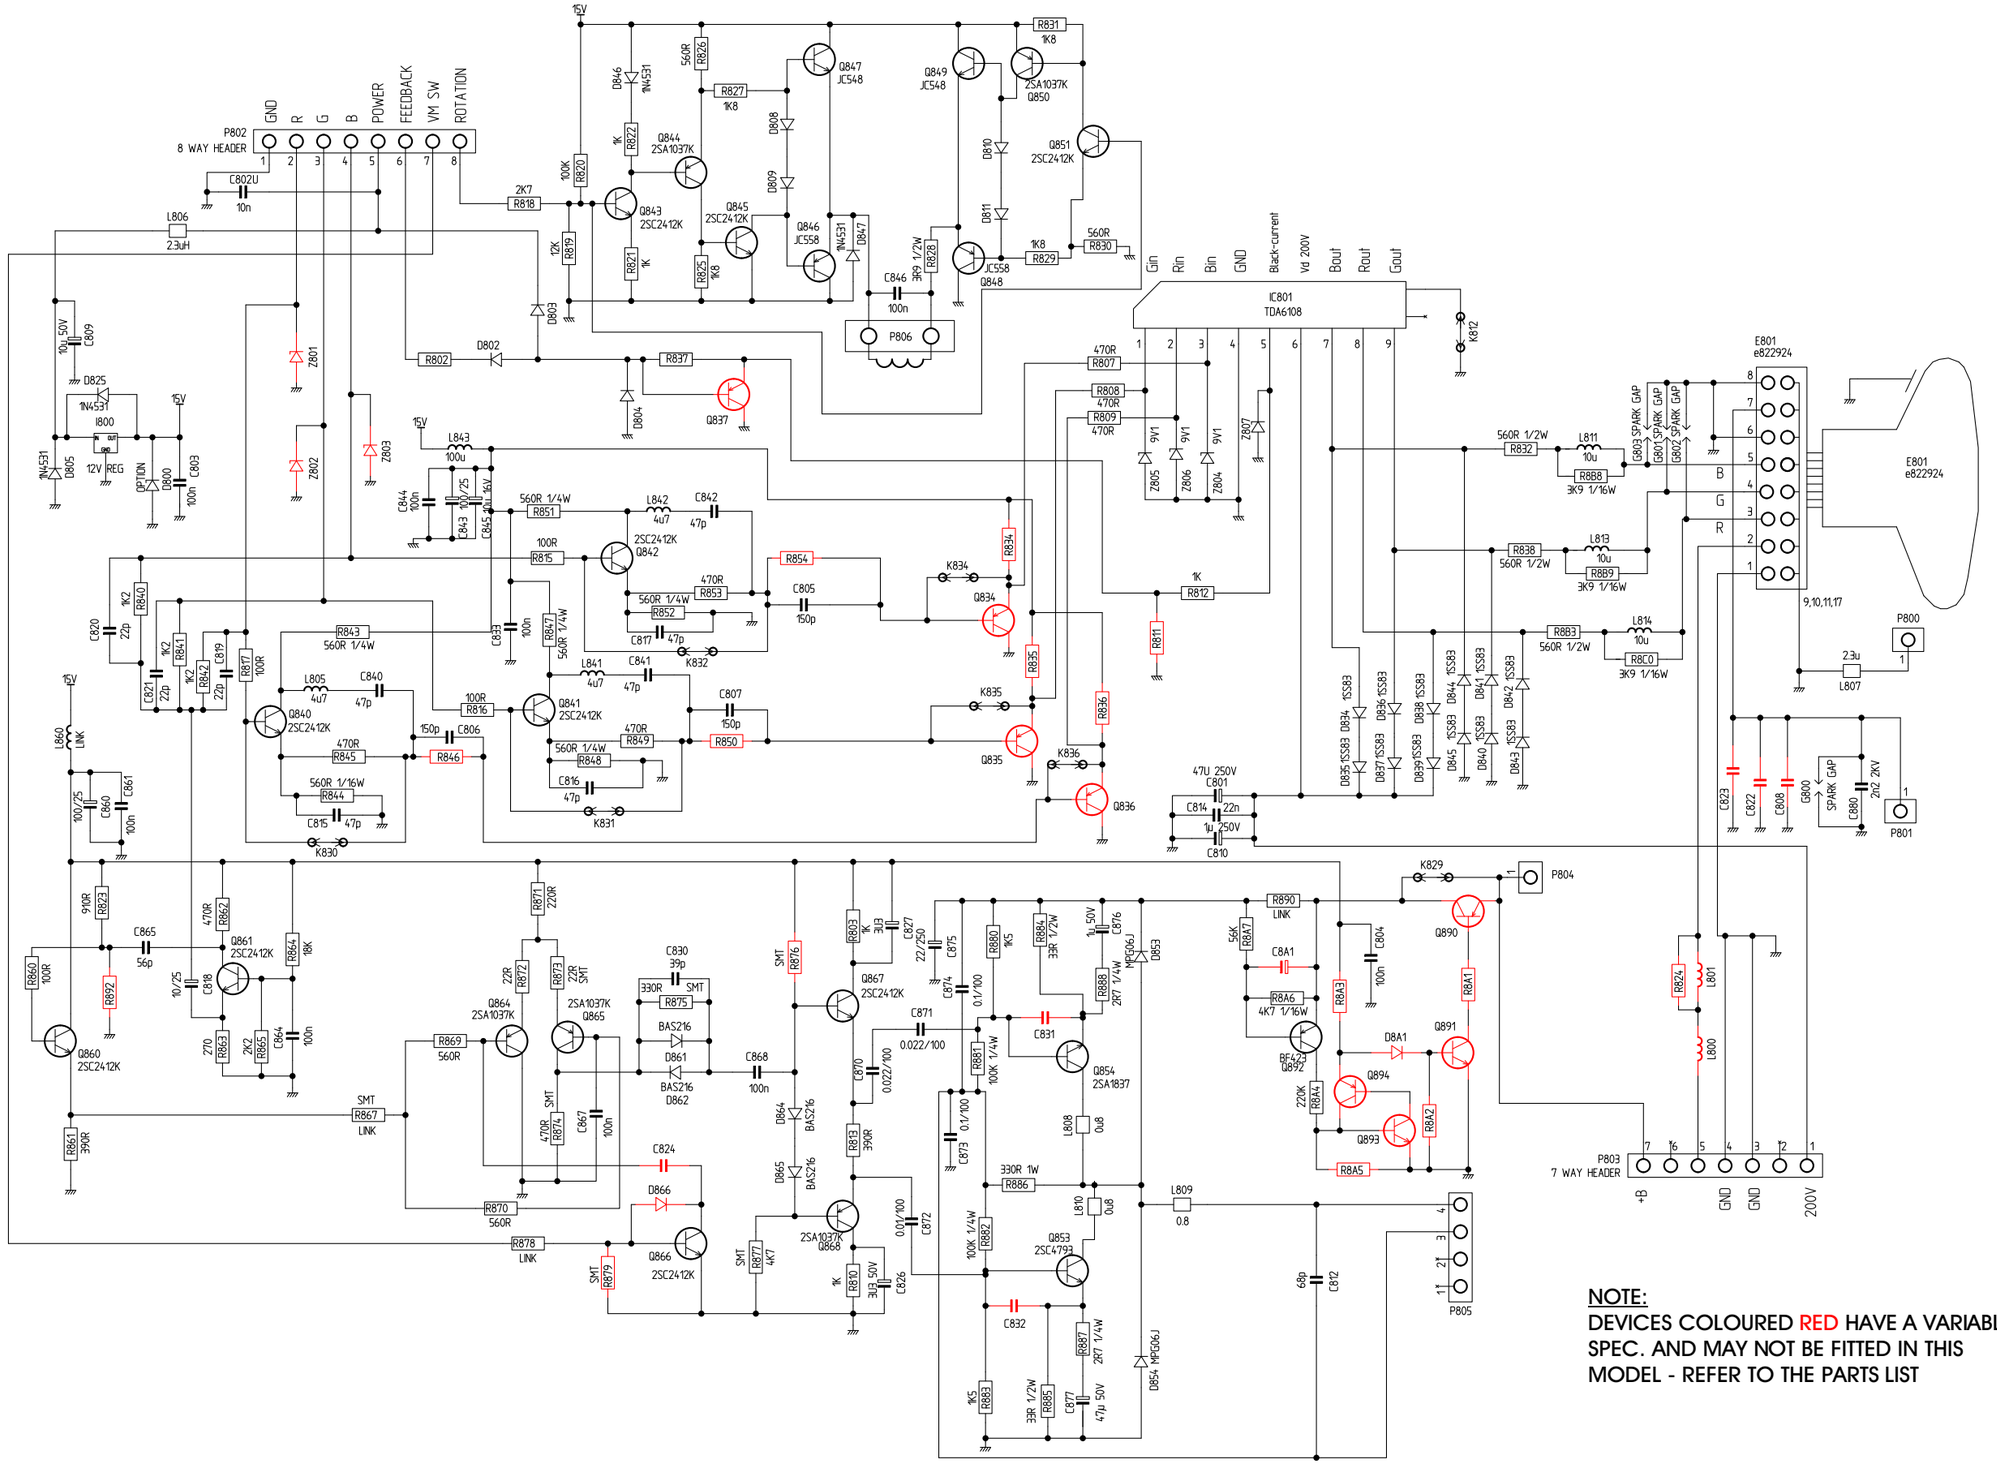

NOTE:
DEVICES COLOURED RED HAVE A VARIABLE SPEC. AND MAY NOT BE FITTED IN THIS MODEL - REFER TO THE PARTS LIST

SM00031	A20 CRT BASE CIRCUIT	HITACHI

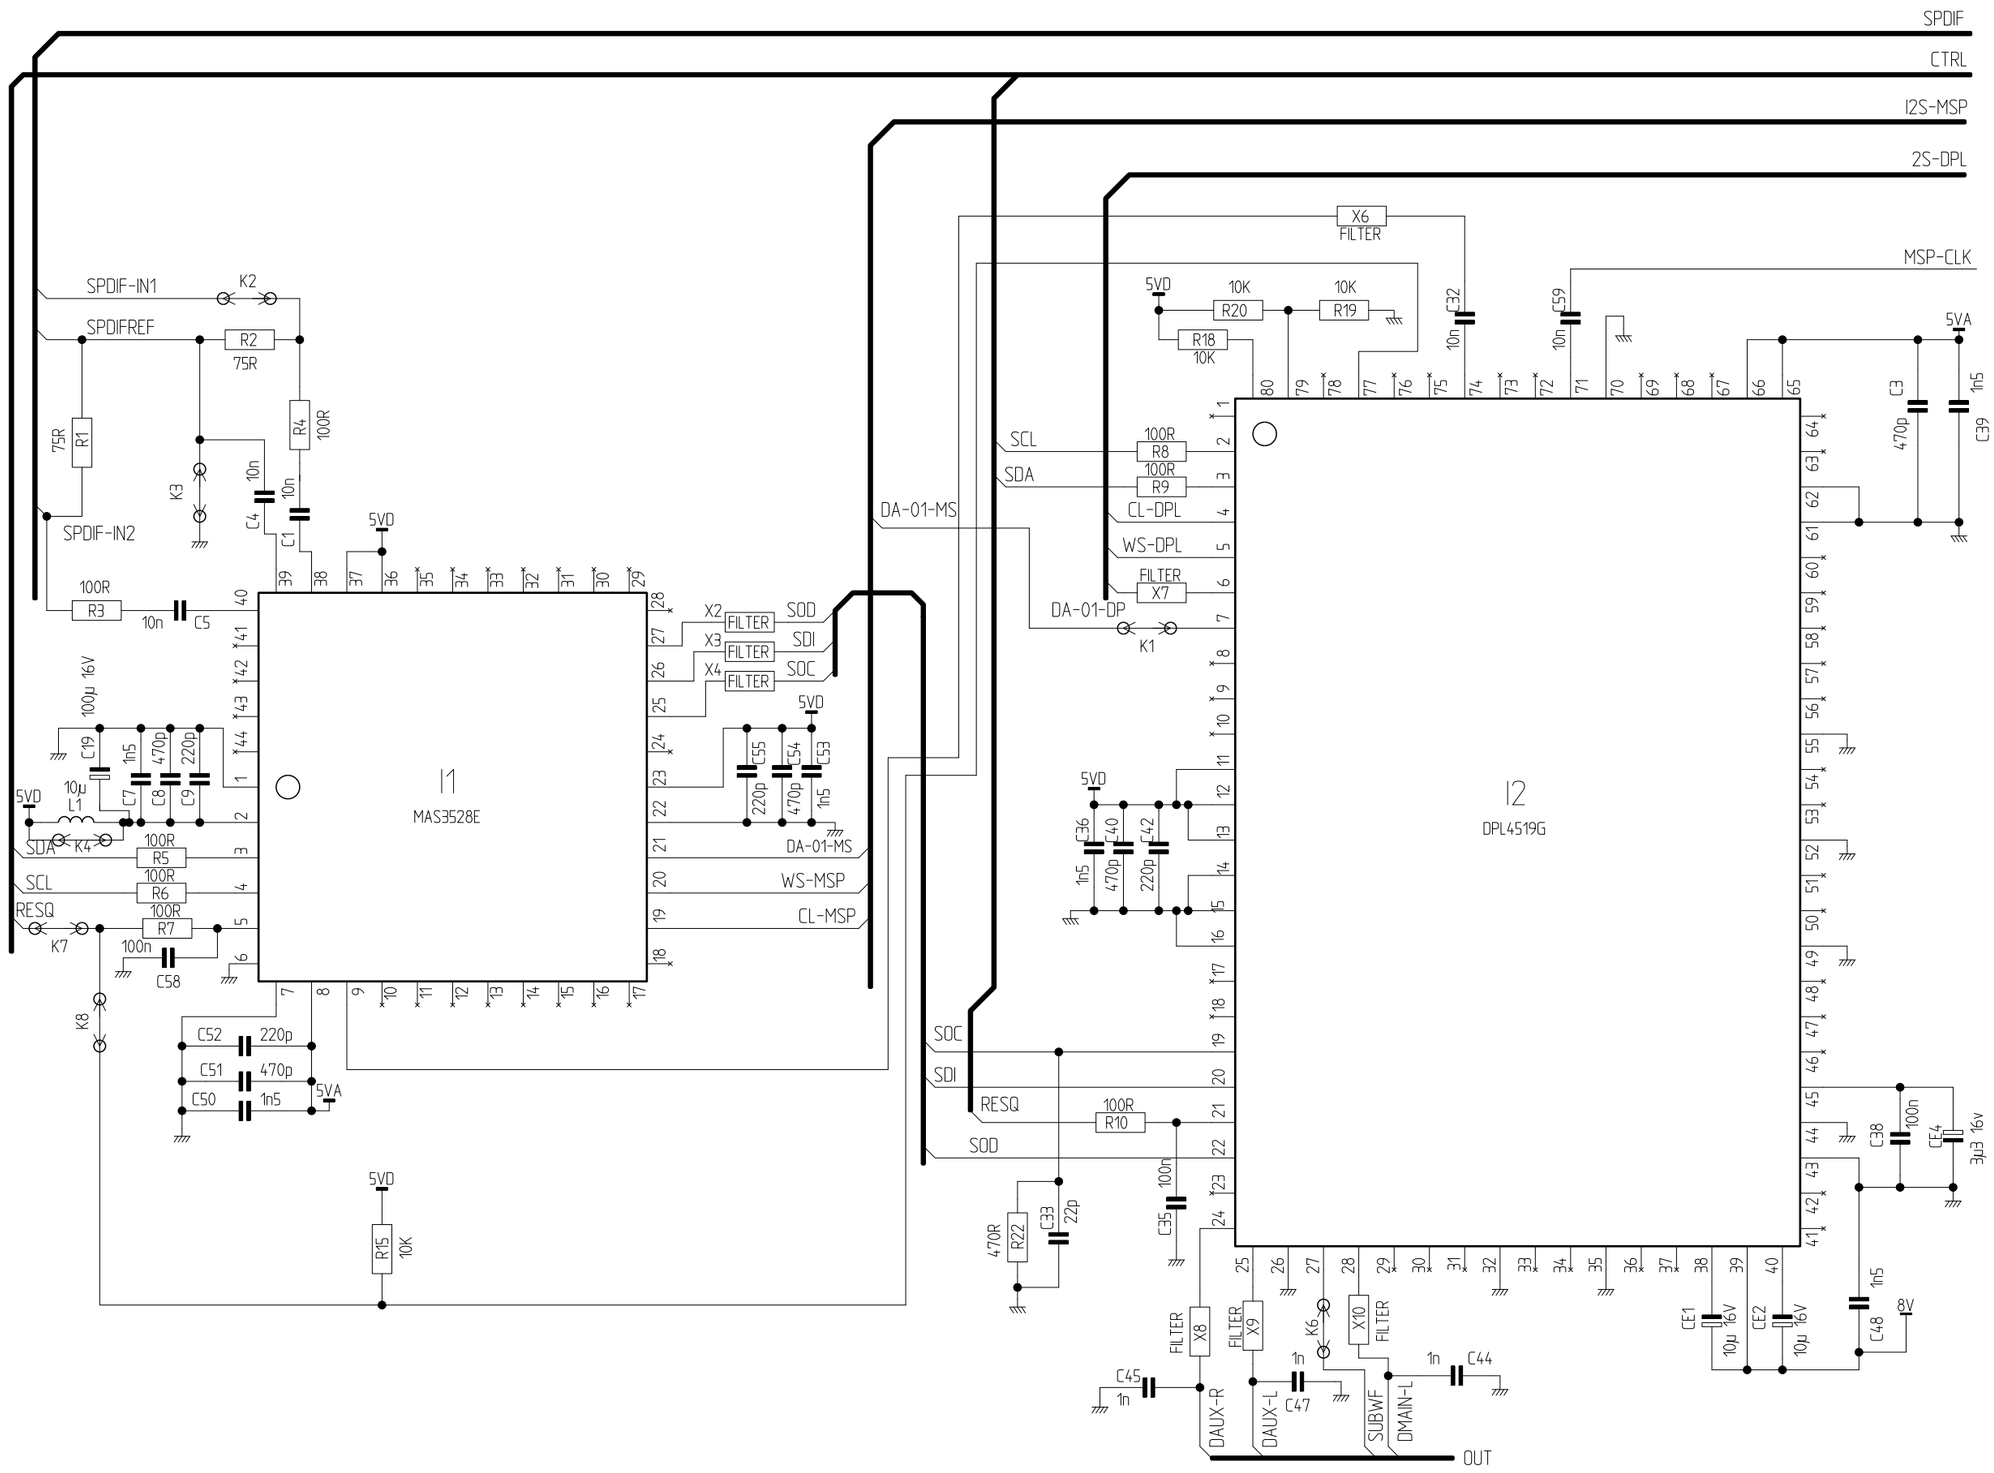

SM00031	A20 MSP CIRCUIT - Sheet 1	HITACHI

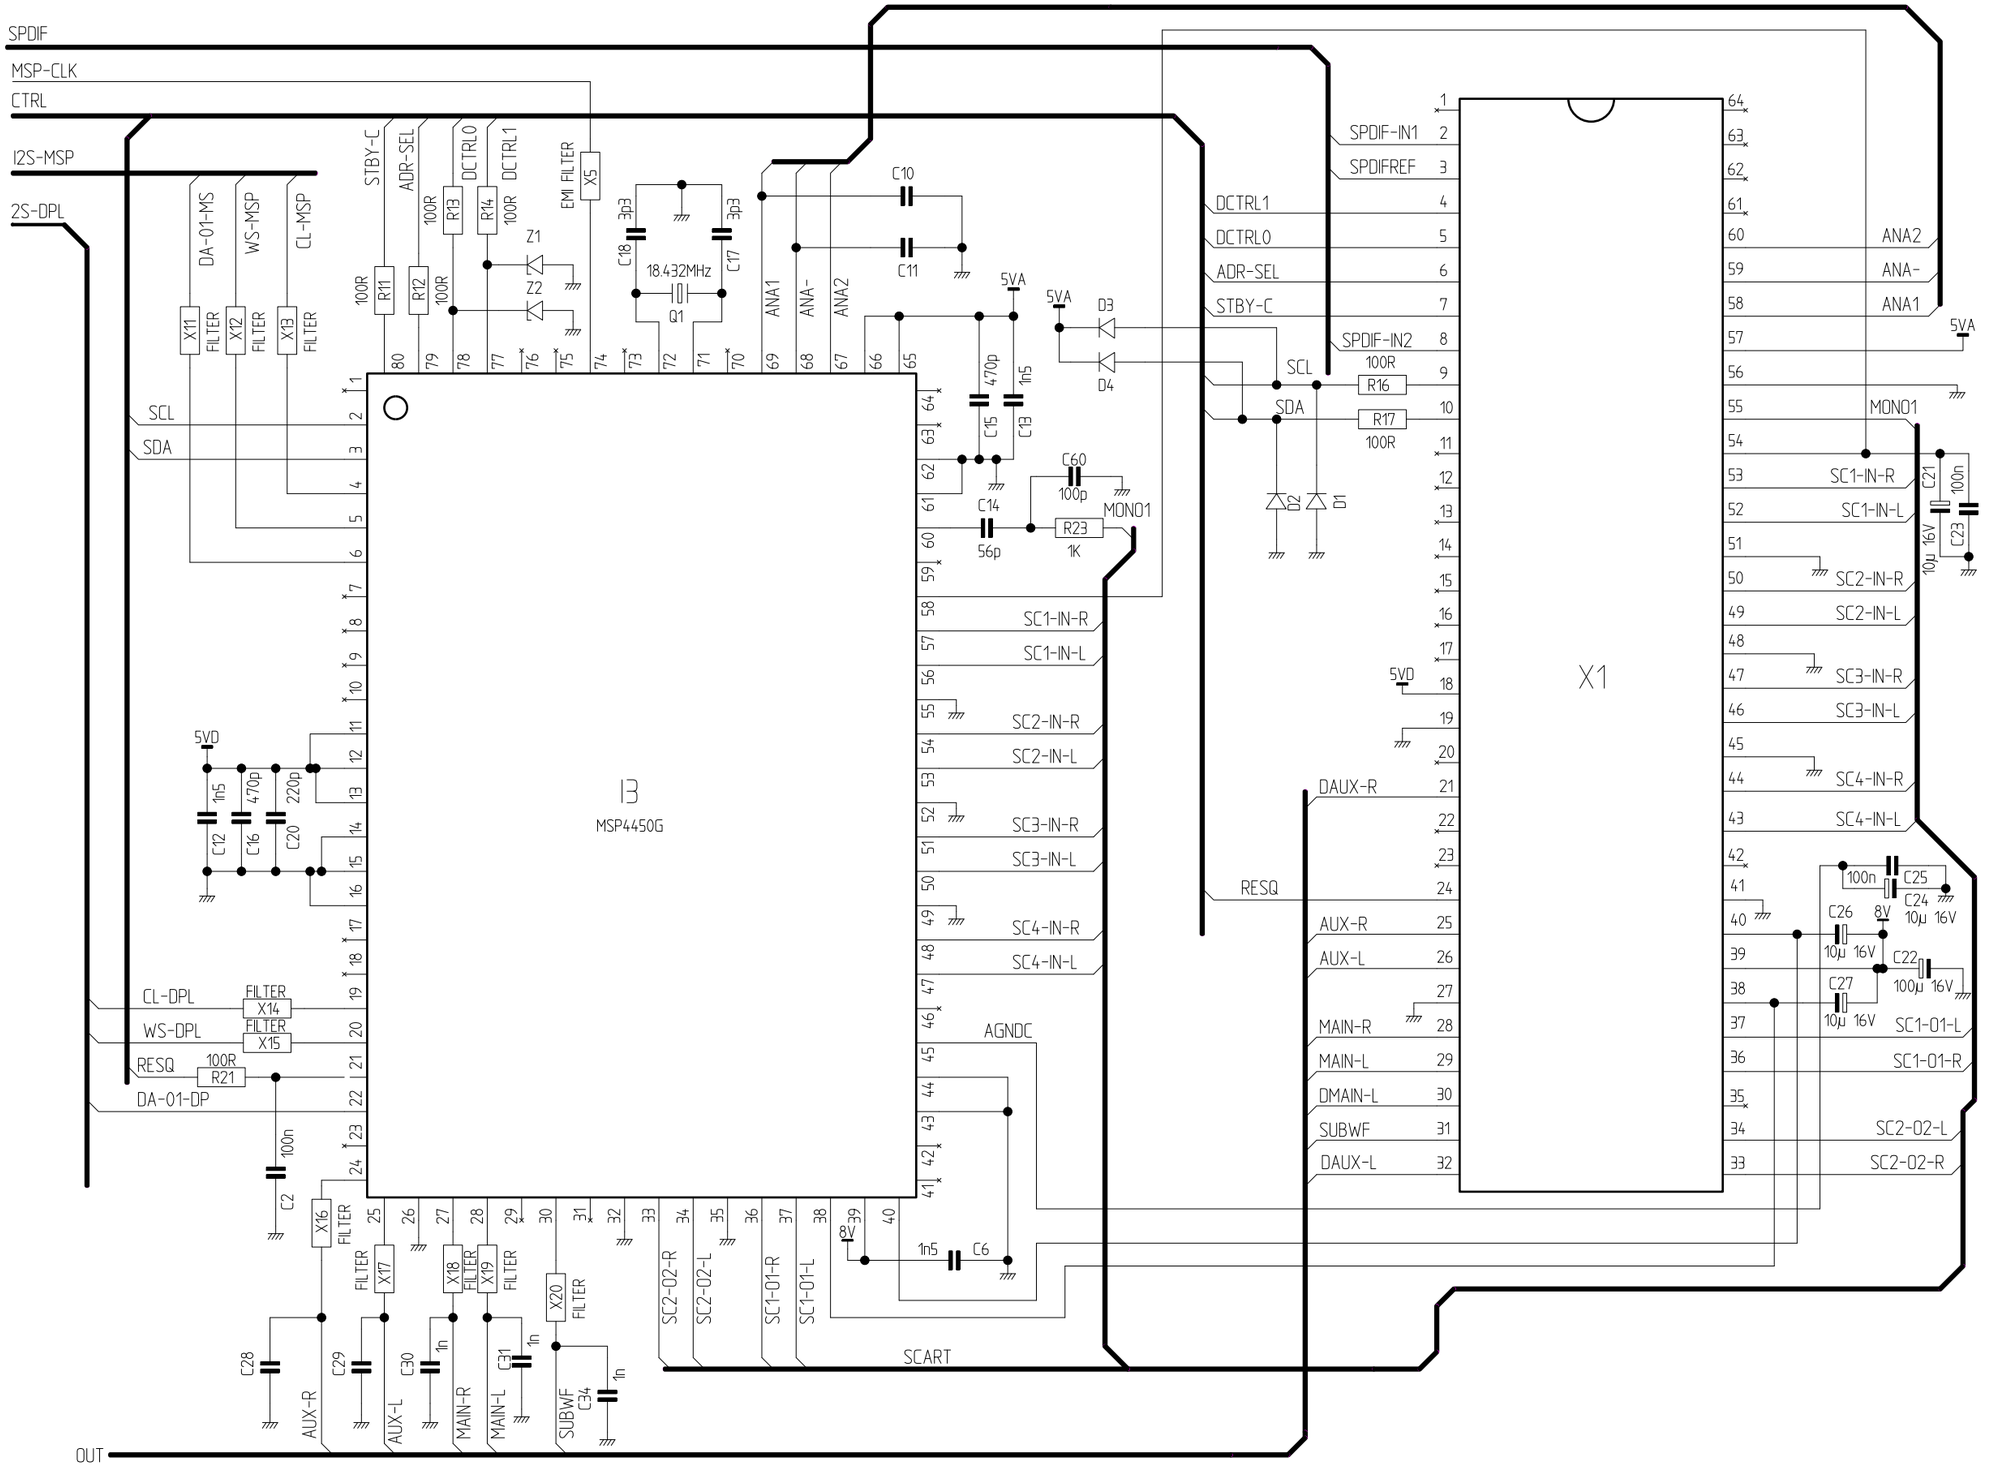

SM00031	A20 MSP CIRCUIT - Sheet 2	HITACHI

	Relevant Parts Lists											
Model Number	a529050	a529070	a529270	a529280	a529290	a529350	a529360	a529370	a529445	a529448	a529449	a529450
C28WF530N				✓		✓						
C28WF530N-IRISH						✓						✓
C28WF532N						✓					✓	
C28WF535N						✓		✓	✓			
C32WF535N		✓	✓						✓			
C32WF535N-IRISH		✓							✓	✓		
CL28WF530AN					✓	✓						
CL28WF535AN						✓	✓		✓			
CL32WF535AN	✓	✓							✓			

A529050 PARTS LIST

I.D.	Part No.	Description
#200	J3731082	PURSE LOCK
#27	L350016	FERRITE CORE
#270	J2123462M	FERRITE BEADS TYPE B2.3UH
#40	E573018	FERRITE CLAMP CORE
#4069	J3731082	PURSE LOCK
#4070	G864006	CABLE TIE T18R
#500	E573018	FERRITE CLAMP CORE
#5000	N937053	CHASSIS FRAME
#5071	G291311	3X12 BT SCREW (BLACK)
#5072	G291311	3X12 BT SCREW (BLACK)
#5073	G291311	3X12 BT SCREW (BLACK)
#5075	N332067	SPACER
#5076	G291311	3X12 BT SCREW (BLACK)
#67	J3731082	PURSE LOCK
#68	J3731082	PURSE LOCK
#802	G864006	CABLE TIE T18R
#E802	JBM00041	FERRITE CORES BP53RB
AV300	JEU00581	PHONO-S/VHS CONNECTOR
B001	PC55002	A20 MAIN PCB BEAB
C001	J0893179R	CKM-104K160B-CNT1608
C002	J0893027R	CKM-104K250B-CNT2125
C003	J0800271R	ELECT CAP 0.1UF 50V SMG
C004	J0800282R	CAP ELECTRO 2.2UF-M 50V
C005	J0800291R	CAP ELEC 10uF 16V SMG
C007	J0800282R	CAP ELECTRO 2.2UF-M 50V
C008	J0800291R	CAP ELEC 10uF 16V SMG
C009	J0800291R	CAP ELEC 10uF 16V SMG
C010	J0893179R	CKM-104K160B-CNT1608
C011	J0893179R	CKM-104K160B-CNT1608
C012	J0893027R	CKM-104K250B-CNT2125
C013	J0227219R	CK73B1H104KR 100N 1206
C014	J0800317R	CP ELECTRO 47UF SMG 16
C015	J0893179R	CKM-104K160B-CNT1608
C016	J0228042R	CC73SCH1H330JR
C017	J0228042R	CC73SCH1H330JR
C019	J0893222R	CKM-103K500B-CNT1608
C020	J0800271R	ELECT CAP 0.1UF 50V SMG
C202	J0800364F	CAP ELECT 1000UF 50V SMG
C203	J0800361F	CAP ELEC 1000UF-M SMG 16V
C204	J0227219R	CK73B1H104KR 100N 1206
C205	J0800317R	CP ELECTRO 47UF SMG 16
C206	J0893044R	CKM 103K500B CNT2125
C208	J0800291R	CAP ELEC 10uF 16V SMG
C209	J0893044R	CKM 103K500B CNT2125
C210	J0893222R	CKM-103K500B-CNT1608
C211	J0893123R	CC73MCH1H560JR
C212	J0893113R	CC73MCH1H100C
C213	J0893044R	CKM 103K500B CNT2125
C215	J0893222R	CKM-103K500B-CNT1608
C220	J0893044R	CKM 103K500B CNT2125
C301	J0800352R	ELEC CAP 470UF 10V SMG
C302	J0227009R	CK73B1H102KR 1N 1206
C303	J0893027R	CKM-104K250B-CNT2125
C304	J0893027R	CKM-104K250B-CNT2125
C305	J0880194R	0.1UF 50V +-5% (100N)
C310	J0893031R	CKM 102K500B CNT2125
C312	J0893179R	CKM-104K160B-CNT1608
C313	J0893027R	CKM-104K250B-CNT2125
C318	J0893027R	CKM-104K250B-CNT2125
C324	J0893179R	CKM-104K160B-CNT1608
C325	J0893179R	CKM-104K160B-CNT1608
C326	J0893179R	CKM-104K160B-CNT1608
C327	J0880194R	0.1UF 50V +-5% (100N)
C328	J0893027R	CKM-104K250B-CNT2125
C329	J0893027R	CKM-104K250B-CNT2125
C331	J0800326R	CEL-101M160WMFT
C332	J0800317R	CP ELECTRO 47UF SMG 16
C345	J0227219R	CK73B1H104KR 100N 1206
C369	J0800326R	CEL-101M160WMFT
C370	J0893027R	CKM-104K250B-CNT2125
C371	J0800326R	CEL-101M160WMFT
C372	J0893027R	CKM-104K250B-CNT2125
C373	J0800326R	CEL-101M160WMFT
C374	J0227219R	CK73B1H104KR 100N 1206
C403	J0893126R	CCM-101J500CHCNT1608
C404	J0800294R	ELECT CAP 10UF 50V SMG
C405	J0893031R	CKM 102K500B CNT2125
C406	J0228054R	CC73SCH1H101JR
C407	J0800294R	ELECT CAP 10UF 50V SMG
C408	J0893031R	CKM 102K500B CNT2125
C410	J0227009R	CK73B1H102KR 1N 1206
C411	J0228054R	CC73SCH1H101JR
C412	J0893031R	CKM 102K500B CNT2125
C413	J0228054R	CC73SCH1H101JR
C414	J0800294R	ELECT CAP 10UF 50V SMG
C415	J0893031R	CKM 102K500B CNT2125
C416	J0800294R	ELECT CAP 10UF 50V SMG
C417	J0893208R	CKM-102K500B-CNT1608
C420	J0800291R	CAP ELEC 10uF 16V SMG
C422	J0893031R	CKM 102K500B CNT2125
C423	J0893027R	CKM-104K250B-CNT2125
C424	J0800291R	CAP ELEC 10uF 16V SMG
C425	J0893027R	CKM-104K250B-CNT2125
C431	J0227449R	CK73B1E334ZR 330N 25V
C432	J0227449R	CK73B1E334ZR 330N 25V
C433	J0227449R	CK73B1E334ZR 330N 25V
C434	J0227449R	CK73B1E334ZR 330N 25V
C438	J0893179R	CKM-104K160B-CNT1608
C439	C353883	GRM40Y5V334Z16PT
C441	J0227449R	CK73B1E334ZR 330N 25V
C442	J0227449R	CK73B1E334ZR 330N 25V
C443	J0893248R	CKM-334Z160B-CNT1608
C444	C353883	GRM40Y5V334Z16PT
C445	C353883	GRM40Y5V334Z16PT
C446	C353883	GRM40Y5V334Z16PT
C447	C353883	GRM40Y5V334Z16PT
C448	C353883	GRM40Y5V334Z16PT
C452	J0893197R	CKM-223K250B-CNT1608
C454	J0893027R	CKM-104K250B-CNT2125
C457	J0796491R	RMC73M-000R

A529050 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
C462	J0893213R	CC73MCH1H222JR	C621	J0893208R	CKM-102K500B-CNT1608
C463	J0893179R	CKM-104K160B-CNT1608	C624	C140711	10N 10% POLY CAPACITOR
C465	J0800294R	ELECT CAP 10UF 50V SMG	C639	J0800292R	CAP ELECT 10UF 25V SMG
C466	J0800353R	CAP ELECTRO 470UF 16V	C644	J0890092R	CAP CERAMIC 0.0022uF 50V
C467	J0800294R	ELECT CAP 10UF 50V SMG	C701	J0243507R	CK45B2H331KB
C468	J0893031R	CKM 102K500B CNT2125	C702	J0257540F	ELEC CAP 4U7 250V
C469	J0893179R	CKM-104K160B-CNT1608	C703	C142760	12N 1.6KV R/EVOX PHE428
C470	J0893179R	CKM-104K160B-CNT1608	C705	J0299994F	POLY CAP .022UF 5% 630V
C471	J0800327R	ELECT CAP 100UF 25V SMG	C706	J0890087R	CAP CERAMIC 1000pf-B 50V
C500	J0893039R	CKM 472K500B CNT 2125	C707	JAJ00141F	CC-332K202R-D 10P 3N3 2KV
C501	J0800279R	ELECT CAP 1.UF 50V	C708	J0244505R	CER CAP 2n2-K 500V
C502	J0195250R	RMC73S 000R	C709	J0253953R	CE04W2C2R2M
C503	J0893044R	CKM 103K500B CNT2125	C710	J0253953R	CE04W2C2R2M
C504	J0800279R	ELECT CAP 1.UF 50V	C711	C353764	&330N MKP379 44334
C506	J0890087R	CAP CERAMIC 1000pf-B 50V	C712	C457764	&470N MKP379 44474
C508	J0893222R	CKM-103K500B-CNT1608	C713	C353764	&330N MKP379 44334
C509	J0893222R	CKM-103K500B-CNT1608	C714	C257764	& 270N 250V MKP379
C510	J0227436R	0.22U +/-10% 1206 SMT	C715	J0243512R	CK45B2H821KB
C511	J0893206R	680PF +/-10% 0603 SMT	C716	C140707	CAP 10N 365-51103 MULARD
C518	J0893048R	CKM-223K500B-CNT2125	C719	J0257540F	ELEC CAP 4U7 250V
C518U	C842711	CAP 82N 365 100V POLY	C720	J0880033R	CQM-152K500HFT
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V	C724	JAJ00121R	CK45-R3DD101K 100PF 2KV
C572	J0228066R	GRM40CDG331J50PT	C726	J0800336R	CAP ELEC 220UF M SMG 25V
C575	J0893027R	CKM-104K250B-CNT2125	C727	J0243507R	CK45B2H331KB
C576	J0893048R	CKM-223K500B-CNT2125	C732	J0800291R	CAP ELEC 10uF 16V SMG
C577	J0893027R	CKM-104K250B-CNT2125	C735U	J0880044R	CAP POLYESTER 0.01UF K50V
C578	J0893027R	CKM-104K250B-CNT2125	C737	C160708	1UF +-10% 250V 368-45105
C579	J0893027R	CKM-104K250B-CNT2125	C742	J0800337R	CEL-221M350WMFT
C581	J0880016R	POLY CAP FLM 0.1UF 50V	C743	J0880053R	CQ93M1H473KEB(MF) N/PAN
C582	J0893027R	CKM-104K250B-CNT2125	C747	J0250511R	CAP POLY 0.022UF PHILIPS
C583	J0195250R	RMC73S 000R	C748	JAJ00134R	CK45-R3DD102K 1N 2KV
C585	J0800372F	CEL 332 M160WNL SMG 5MM	C749	J0880194R	0.1UF 50V +-5% (100N)
C586	J0893027R	CKM-104K250B-CNT2125	C752	JAJ00129R	CK45-R3DD 471K
C588	J0893027R	CKM-104K250B-CNT2125	C764	J0800279R	ELECT CAP 1.UF 50V
C589	J0893039R	CKM 472K500B CNT 2125	C769	JAJ00134R	CK45-R3DD102K 1N 2KV
C590	J0195250R	RMC73S 000R	C770	J0800292R	CAP ELECT 10UF 25V SMG
C591	J0195250R	RMC73S 000R	C900	C150763	&100NF 20% X2 275V BEABT
C592	J0195250R	RMC73S 000R	C901	J0262774N	0.22UF 250VAC X2 ~BEABT
C593	J0800279R	ELECT CAP 1.UF 50V	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
C594	J0228038R	CC73SCH1H220JR	C903	J0890083R	CK45 B1H471KB
C595	J0228038R	CC73SCH1H220JR	C904	C648763	&68NF 20% X2 275V BEABT
C596	J0893027R	CKM-104K250B-CNT2125	C905	C001561	ELECT CAP 100UF 250V
C597	J0800372F	CEL 332 M160WNL SMG 5MM	C908	J0800329R	ELECT CAP 100UF 50V SMG
C598	C457884	&GRM40X7R474K25PT 470N	C909	J0800352R	ELEC CAP 470UF 10V SMG
C599	J0893035R	CKM--222K500B CNT2125	C910	J0880044R	CAP POLYESTER 0.01UF K50V
C602	J0800337R	CEL-221M350WMFT	C911	J0800328R	CEL-101M350WMFT
C603	J0800329R	ELECT CAP 100UF 50V SMG	C912	J0244505R	CER CAP 2n2-K 500V
C604	J0880044R	CAP POLYESTER 0.01UF K50V	C913	J0800327R	ELECT CAP 100UF 25V SMG
C605	C150711	CAP 100N 36521104 100V POL	C914	C005046	ELECT 1000UF 25V LXY
C606	J0893027R	CKM-104K250B-CNT2125	C915	J0800354R	470UF 25V SMG
C607	J0893027R	CKM-104K250B-CNT2125	C916	C005046	ELECT 1000UF 25V LXY
C610	J0890092R	CAP CERAMIC 0.0022uF 50V	C917	J0880048R	CQT223K50MB (PANASONIC)
C614	C150711	CAP 100N 36521104 100V POL	C918	C001561	ELECT CAP 100UF 250V
C616	J0800339F	CAP ELECT 220UF 63V	C919	J0890078R	CK45B1H221KB (MURATA)
C617	J0227009R	CK73B1H102KR 1N 1206	C920	C001561	ELECT CAP 100UF 250V

A529050 PARTS LIST

I.D.	Part No.	Description
C922	J0880037R	CQM332K500HFT
C923	J0880037R	CQM332K500HFT
C924	J0800294R	ELECT CAP 10UF 50V SMG
C925	JAJ00121R	CK45-R3DD101K 100PF 2KV
C926	JAJ00127R	CK45-R3DD 331K
C927	JAJ00121R	CK45-R3DD101K 100PF 2KV
C929	J0800327R	ELECT CAP 100UF 25V SMG
C931	JAJ00138F	CC-222K202R-DF 2N2 2KV
C932	J0880037R	CQM332K500HFT
C933	J0253491F	ELEC CAP 100UF 200V
C936	J0880051R	CQ93M1H333KEB PANASONIC
C942	J0880042R	CQ93M1H682KEB(MF) N/PAN
C950	J0259431F	ELEC CAP 220UF 200V
C951	J0800362F	CAP ELECT 1000UF 25V SMG
C952	J0800362F	CAP ELECT 1000UF 25V SMG
C953	J0243509R	CERAMIC CAP 470p 500V
C954	J0243509R	CERAMIC CAP 470p 500V
C955	JAJ00129R	CK45-R3DD 471K
C957	J0243509R	CERAMIC CAP 470p 500V
C959	J0800353R	CAP ELECTRO 470UF 16V
C960	J0244501R	CER CAP 1000PF-K 500V
C961	J0244501R	CER CAP 1000PF-K 500V
C962	J0244501R	CER CAP 1000PF-K 500V
C963	J0244501R	CER CAP 1000PF-K 500V
C964	J0243511R	CER CAP 680PF-K 500V
C967	J0243509R	CERAMIC CAP 470p 500V
C970	J0800345R	ELECT CAP 330UF 25V SMG
C971	J0880044R	CAP POLYESTER 0.01UF K50V
C977	J0243509R	CERAMIC CAP 470p 500V
C986	J0800328R	CEL-101M350WMFT
C987	J0800352R	ELEC CAP 470UF 10V SMG
C990	J0880048R	CQT223K50MB (PANASONIC)
C991	E884110	SPARK GAP 10N 2KV SDUK 16
C992	J0880044R	CAP POLYESTER 0.01UF K50V
C993	C150891	100N 500V CAP
C994	J0800327R	ELECT CAP 100UF 25V SMG
C995	J0880037R	CQM332K500HFT
C997	J0880031R	CQ93M1H102KEB (MF) N/PAN
C999	C232753	2N2 4KVAC PME294 UL BEABT
CA01U	J0880198R	POLY CAP 0.22UF-J 50V
CA02U	J0880198R	POLY CAP 0.22UF-J 50V
CA03	J0880198R	POLY CAP 0.22UF-J 50V
CA04	J0893031R	CKM 102K500B CNT2125
CA05	J0893031R	CKM 102K500B CNT2125
CA06	J0893118R	CCM-270J500CHCNT1608
CA07	C001550	4700UF 25V SMG S/LEG
CA08	J0893135R	CC73MCH1H471JR 1608
CA09	J0893179R	CKM-104K160B-CNT1608
CA10	J0893133R	CC73MCH1H331JR
CA11	J0893135R	CC73MCH1H471JR 1608
CA12	J0893135R	CC73MCH1H471JR 1608
CA13	J0284623R	CEL-1R0M500WMFT(BP)E
CA14	C001550	4700UF 25V SMG S/LEG
CA15	C343882	GRM40X7R333K50-550
CA16	J0880198R	POLY CAP 0.22UF-J 50V

I.D.	Part No.	Description
CA18	J0893208R	CKM-102K500B-CNT1608
CA20	J0893027R	CKM-104K250B-CNT2125
CA21	J0228070R	MINI CHIP 470PF-J CH 50V
CA22	J0893133R	CC73MCH1H331JR
CA24	J0893027R	CKM-104K250B-CNT2125
CA25	J0880064R	CQM - 334J500HFT
CA27	J0893031R	CKM 102K500B CNT2125
CA28	J0284623R	CEL-1R0M500WMFT(BP)E
CA29	C343882	GRM40X7R333K50-550
CA30	J0893208R	CKM-102K500B-CNT1608
CA31	J0800291R	CAP ELEC 10uF 16V SMG
CA32	J0893179R	CKM-104K160B-CNT1608
CA33	J0893179R	CKM-104K160B-CNT1608
CA34	J0893222R	CKM-103K500B-CNT1608
CA35	J0800316R	47u 10V ELECT CAP SMG
CA36	J0800316R	47u 10V ELECT CAP SMG
CA37	J0800325R	CEL-101M100WMFT
CA38	J0800325R	CEL-101M100WMFT
CA39	J0893219R	CCM-682K500B-CNT1608
CA40	J0893042R	CKM 682K500B CNT2125
CA41	J0800325R	CEL-101M100WMFT
CA42	J0284623R	CEL-1R0M500WMFT(BP)E
CA44	J0284623R	CEL-1R0M500WMFT(BP)E
COVER	N332053	COVER
CS10B	JAA00381R	10UF 6.3V SMT 3216
CS11	J0228054R	CC73SCH1H101JR
CS12	J0893126R	CCM-101J500CHCNT1608
CS20	J0800326R	CEL-101M160WMFT
CS23B	JAA00381R	10UF 6.3V SMT 3216
CS24	J0893126R	CCM-101J500CHCNT1608
CS25	J0893126R	CCM-101J500CHCNT1608
CS31	J0893126R	CCM-101J500CHCNT1608
CS32	J0893126R	CCM-101J500CHCNT1608
CS33B	JAA00381R	10UF 6.3V SMT 3216
CS40B	JAA00381R	10UF 6.3V SMT 3216
CS44	J0893126R	CCM-101J500CHCNT1608
CS45	J0893126R	CCM-101J500CHCNT1608
CS51	J0893126R	CCM-101J500CHCNT1608
CS52	J0228054R	CC73SCH1H101JR
CS53B	JAA00381R	10UF 6.3V SMT 3216
CS60B	JAA00381R	10UF 6.3V SMT 3216
CS62	J0893126R	CCM-101J500CHCNT1608
CS63	J0893126R	CCM-101J500CHCNT1608
CS91	J0796491R	RMC73M-000R
CU01	J0800359R	CEL-102M100WMFT
D001	T531069	SHOTTKY 30V/200mA/BAT254
D002	T531067	DIODE BAS216 S/MOUNT
D003	T531067	DIODE BAS216 S/MOUNT
D004	T531069	SHOTTKY 30V/200mA/BAT254
D006	T531069	SHOTTKY 30V/200mA/BAT254
D007	T531069	SHOTTKY 30V/200mA/BAT254
D008	T531069	SHOTTKY 30V/200mA/BAT254
D009	T531069	SHOTTKY 30V/200mA/BAT254
D011	J2343963M	MPG06J (TAPE) GI
D015	T531067	DIODE BAS216 S/MOUNT

A529050 PARTS LIST

I.D.	Part No.	Description
D017	T531069	SHOTTKY 30V/200mA/BAT254
D018	T531069	SHOTTKY 30V/200mA/BAT254
D206	T531067	DIODE BAS216 S/MOUNT
D208	T531067	DIODE BAS216 S/MOUNT
D209	T531067	DIODE BAS216 S/MOUNT
D301	T531068	DIODE MA723/TP PANASONIC
D501	T531067	DIODE BAS216 S/MOUNT
D502	T531056	DIODE BYV10-40 ~MULLARD
D503	T531056	DIODE BYV10-40 ~MULLARD
D507	T531067	DIODE BAS216 S/MOUNT
D508	J2348921M	DIODE 1N4531
D522	T531068	DIODE MA723/TP PANASONIC
D523	T531069	SHOTTKY 30V/200mA/BAT254
D601	J2348921M	DIODE 1N4531
D603	T531067	DIODE BAS216 S/MOUNT
D604	T431113	DIODE BYD33J MULL BEAB
D610	T431113	DIODE BYD33J MULL BEAB
D611	T431113	DIODE BYD33J MULL BEAB
D622	J2343962M	MPG06G
D645	T536259	BZX79C56V
D701	T431113	DIODE BYD33J MULL BEAB
D702	T431113	DIODE BYD33J MULL BEAB
D703	J2343941M	RGP10G
D706	T431117F	DIODE BY228 P/F PHILIPS
D707	T531086F	BYW96E
D708	J2336612	RU3AM
D711	T531086F	BYW96E
D713	T431113	DIODE BYD33J MULL BEAB
D714	T431113	DIODE BYD33J MULL BEAB
D715	J2348921M	DIODE 1N4531
D716	J2348921M	DIODE 1N4531
D735	T431113	DIODE BYD33J MULL BEAB
D739	J2348921M	DIODE 1N4531
D745	J2348921M	DIODE 1N4531
D904	J2348921M	DIODE 1N4531
D905	T431113	DIODE BYD33J MULL BEAB
D906	T431113	DIODE BYD33J MULL BEAB
D907	T531055	DIODE BAT85 SCHOTTKY MULL
D910	J2348921M	DIODE 1N4531
D911	J2348921M	DIODE 1N4531
D913	J2348921M	DIODE 1N4531
D914	J2348921M	DIODE 1N4531
D915	T431113	DIODE BYD33J MULL BEAB
D916	T431113	DIODE BYD33J MULL BEAB
D919	T531086F	BYW96E
D920	J2342711M	DIODE EM2A (SANKEN)
D921	J2342711M	DIODE EM2A (SANKEN)
D922	J2342711M	DIODE EM2A (SANKEN)
D923	J2342711M	DIODE EM2A (SANKEN)
D924	J2342711M	DIODE EM2A (SANKEN)
D925	T431122	DIODE BYV28-200~PHILIPS~
D927	J2348921M	DIODE 1N4531
D931	J2342711M	DIODE EM2A (SANKEN)
D933	T536259	BZX79C56V
D934	T431114	& BYD33M
D953	T431145	BYW29E-200
D953A	H224075	H/SINK F9-4-220 &TAG COL
D955	T431127	BYR29F-700
D955A	H235369	FI2-32-2LA-2 HEATSINK
D955B	G291023	M2.5x8 TAPTITE SCREW
D955C	G560333	M2.5 SPRING WASHER
D960	J2342711M	DIODE EM2A (SANKEN)
D961	J2342711M	DIODE EM2A (SANKEN)
D962	J2342711M	DIODE EM2A (SANKEN)
D963	J2342711M	DIODE EM2A (SANKEN)
D970	T431113	DIODE BYD33J MULL BEAB
D977	T431122	DIODE BYV28-200~PHILIPS~
D982	J2348921M	DIODE 1N4531
D984	T531053	DIODE IN4148 MULL/PHIL/ITT
D991	T431113	DIODE BYD33J MULL BEAB
D992	T431120	DIODE BYV27-150 ~MULLARD~
D994	T531055	DIODE BAT85 SCHOTTKY MULL
D995	T531053	DIODE IN4148 MULL/PHIL/ITT
D996	J2348921M	DIODE 1N4531
D997U	J2348921M	DIODE 1N4531
DA01	T531067	DIODE BAS216 S/MOUNT
DA02	J2348921M	DIODE 1N4531
DA03	T531067	DIODE BAS216 S/MOUNT
DS14	T531067	DIODE BAS216 S/MOUNT
DS25	T531067	DIODE BAS216 S/MOUNT
DS31	T531067	DIODE BAS216 S/MOUNT
DS42	T531067	DIODE BAS216 S/MOUNT
DS51	T531067	DIODE BAS216 S/MOUNT
DS60	T531067	DIODE BAS216 S/MOUNT
E002	E843366	OSD SHIELDED LEAD
E006	E843377	LEAD ASSY 7 WAY 320MM
E04	E843369	SPEAKER LEAD
E10	E846825	A5 SCREEN LD 2PIN EHUK
E20	E843353	2 WAY SHIELDED LEAD 330MM
E206	E843314	CPT EARTH LEAD
E207	E843314	CPT EARTH LEAD
E208	E843286	GROUND LEAD FEMALE
E30	E846825	A5 SCREEN LD 2PIN EHUK
E500	E843376	OSD SHIELDED LEAD
E601	J2661752	3P PLUG PIN/BASE UL BEAB
E802	E843351	A20 8 WAY CRT BASE LEAD
E803	E846902	A7 CRT BASE LEAD 550mm
F501	J2142243	CERAMIC TRAP 5.5MHZ
F900	J2722446	FUS-4A T4AH 250V BEABT
F900A	J2721792	FUSE HOLDER UL/BEAB
F901	E882359	FUSE GLASS T2.0AL BEABT
F901A	J2721792	FUSE HOLDER UL/BEAB
HS01	E826160	H/P SKT HSJ3000-01-010
I001	T900956	LE33CZ TO92
I003	E730301	IC M15_IF2
I003A	E823935	52WAY IC SKT ~ FELCO
I004	T900779	74HC595
I006	T900989	M24C16-W SMT
I007	T900980	M62703ML
I302	T900762	IC 4053 SO16N

A529050 PARTS LIST

I.D.	Part No.	Description
I304	T900762	IC 4053 SO16N
I401A	E823933	*64 PIN SKT 1179976441005
I402	T900902	OP AMPS NJM3403 SMT
I403	T900960	NJM3404
I501	T900959	TDA8879
I601	T900951	TDA8358J
I601A	H235475	HEATSINK A20
I601B	G884020	SPRING CLIP 56379-MULLARD
I900	T900452	UC3844 SGS/UNITRODE
I902	T900815	& UC3843N SGS
I903	T901000	L78M05CV 500MA REGULATOR
I903A	H224085	F9-4-220D-2LS
I904	T900345	REG 7805 SGS/MOTO/NEC
I904A	G884023	SPRING CLIP
I905	T900963	IC VIPER 20
I905A	H224085	F9-4-220D-2LS
I943	T900796	&TL431CZ-AP SGS
I964	T548013	CNY17F1/6 SIEMENS BEABT
I997	T548016	PC817B OPTO BEAB
I998	T548016	PC817B OPTO BEAB
I999	T548013	CNY17F1/6 SIEMENS BEABT
IA01	T900955	TDA7490L
IA04	T900978	TDA2822D SO8
IR01	T549018	& IR REC TSOP2838UH1 TEMIC
K118	J0796491R	RMC73M-000R
K12	J0195250R	RMC73S 000R
K120	J0195248R	RMC73--000R
K121	J0195248R	RMC73--000R
K126	J0796491R	RMC73M-000R
K129	J0195250R	RMC73S 000R
K132	J0195248R	RMC73--000R
K133	J0796491R	RMC73M-000R
K135	J0195248R	RMC73--000R
K136	J0195248R	RMC73--000R
K137	J0796491R	RMC73M-000R
K139	J0195248R	RMC73--000R
K141	J0195250R	RMC73S 000R
K142	J0195250R	RMC73S 000R
K146	J0195248R	RMC73--000R
K152	J0195250R	RMC73S 000R
K157	J0195248R	RMC73--000R
K16	J0195250R	RMC73S 000R
K161	J0195248R	RMC73--000R
K165	J0195248R	RMC73--000R
K166	J0796491R	RMC73M-000R
K167	J0195250R	RMC73S 000R
K168	J0195250R	RMC73S 000R
K170	J0796491R	RMC73M-000R
K171	J0195248R	RMC73--000R
K175	J0195250R	RMC73S 000R
K176	J0195250R	RMC73S 000R
K182	J0796491R	RMC73M-000R
K183	J0796491R	RMC73M-000R
K189	J0796491R	RMC73M-000R
K192	J0796491R	RMC73M-000R
K198	J0195248R	RMC73--000R
K199	J0195250R	RMC73S 000R
K20	J0195250R	RMC73S 000R
K200	J0195248R	RMC73--000R
K202	J0195250R	RMC73S 000R
K203	J0195248R	RMC73--000R
K206	J0796491R	RMC73M-000R
K216	J0796491R	RMC73M-000R
K220	J0796491R	RMC73M-000R
K225	J0195248R	RMC73--000R
K231	J0195248R	RMC73--000R
K233	J0195250R	RMC73S 000R
K236	J0195250R	RMC73S 000R
K237	J0195250R	RMC73S 000R
K240	J0195250R	RMC73S 000R
K241	J0195250R	RMC73S 000R
K242	J0195250R	RMC73S 000R
K243	J0195250R	RMC73S 000R
K25	J0195248R	RMC73--000R
K262	J0195250R	RMC73S 000R
K266	J0195250R	RMC73S 000R
K267	J0796491R	RMC73M-000R
K271	J0796491R	RMC73M-000R
K288	J0195248R	RMC73--000R
K289	J0796491R	RMC73M-000R
K293	J0195248R	RMC73--000R
K299	J0796491R	RMC73M-000R
K300	J0195250R	RMC73S 000R
K303	J0195250R	RMC73S 000R
K310	J0195250R	RMC73S 000R
K333	J0796491R	RMC73M-000R
K341	J0195248R	RMC73--000R
K343	J0195248R	RMC73--000R
K345	J0796491R	RMC73M-000R
K346	J0796491R	RMC73M-000R
K350	J0195248R	RMC73--000R
K39	J0195250R	RMC73S 000R
K405	J0796491R	RMC73M-000R
K504	J0195250R	RMC73S 000R
K510	J0796491R	RMC73M-000R
K512	J0195248R	RMC73--000R
K513	J0796491R	RMC73M-000R
K64	J0195250R	RMC73S 000R
K66	J0195248R	RMC73--000R
K67	J0195248R	RMC73--000R
K68	J0796491R	RMC73M-000R
K84	J0195248R	RMC73--000R
K85	J0195250R	RMC73S 000R
K86	J0195250R	RMC73S 000R
K87	A306099	BRACKET ASSEMBLY
K88	J0195248R	RMC73--000R
KVR900	W024001	0.56ML SFT TIN'D COP WIRE
L001	J2122943M	AXIAL COIL 10UH-J
L002	J2122943M	AXIAL COIL 10UH-J
L003	J2122943M	AXIAL COIL 10UH-J

A529050 PARTS LIST

I.D.	Part No.	Description
L201	J0195250R	RMC73S 000R
L202	J0195250R	RMC73S 000R
L203	J0195250R	RMC73S 000R
L204	J0195250R	RMC73S 000R
L205	J0195250R	RMC73S 000R
L208	J0195250R	RMC73S 000R
L210	J0195250R	RMC73S 000R
L256	J2123781R	FILTER COIL EL101K
L309	L420187	BLM11A102S
L310	L420187	BLM11A102S
L311	J0796491R	RMC73M-000R
L312	J0195250R	RMC73S 000R
L313	J0796491R	RMC73M-000R
L314	J0796491R	RMC73M-000R
L315	J0796491R	RMC73M-000R
L317	J0796491R	RMC73M-000R
L318	J0796491R	RMC73M-000R
L330	J2122956M	COIL LAL 100UH K
L331	J0796491R	RMC73M-000R
L333	L420187	BLM11A102S
L334	L420187	BLM11A102S
L335	J0195250R	RMC73S 000R
L336	J0796491R	RMC73M-000R
L337	J0796491R	RMC73M-000R
L338	J0796491R	RMC73M-000R
L340	J0796491R	RMC73M-000R
L341	J0796491R	RMC73M-000R
L348	J0796491R	RMC73M-000R
L349	J2123781R	FILTER COIL EL101K
L350	J2123781R	FILTER COIL EL101K
L351	J2123781R	FILTER COIL EL101K
L358	J0796491R	RMC73M-000R
L400	J2123781R	FILTER COIL EL101K
L419	L420187	BLM11A102S
L420	J2122943M	AXIAL COIL 10UH-J
L422	L420187	BLM11A102S
L423	J2122943M	AXIAL COIL 10UH-J
L443	L420187	BLM11A102S
L444	J2122943M	AXIAL COIL 10UH-J
L446	L420187	BLM11A102S
L447	J2122943M	AXIAL COIL 10UH-J
L451	J2122253M	AXIAL COIL 100uH K TAPE
L452	J2122253M	AXIAL COIL 100uH K TAPE
L453	J2122253M	AXIAL COIL 100uH K TAPE
L540	J2123781R	FILTER COIL EL101K
L552	J2122943M	AXIAL COIL 10UH-J
L553	J2123781R	FILTER COIL EL101K
L601	J2123462M	FERRITE BEADS TYPE B2.3UH
L602	L300002	RL8010-100J-UL-HUK-B06
L604	L300002	RL8010-100J-UL-HUK-B06
L700	JBH00039	HC-820KS1 (LHL10)
L701	J2123461M	FERRITE BEAD 0.8uH
L702	L380150	? LINEARITY COIL ISKRA
L704	J2123461M	FERRITE BEAD 0.8uH
L705	J2123462M	FERRITE BEADS TYPE B2.3UH
L752	L380147	&BRIDGE COIL
L900	L210068	M/FILTER 97192 RIFA BEAB
L901	L210068	M/FILTER 97192 RIFA BEAB
L902	J2123462M	FERRITE BEADS TYPE B2.3UH
L903	J2123462M	FERRITE BEADS TYPE B2.3UH
L904	J2125579	CHOKE COIL 47UH
L905	J2123462M	FERRITE BEADS TYPE B2.3UH
L909	J2123462M	FERRITE BEADS TYPE B2.3UH
L911	L300005	RL8010-180J-UL-HUK-B06
L921	J2123462M	FERRITE BEADS TYPE B2.3UH
L931	J2123462M	FERRITE BEADS TYPE B2.3UH
L932	J2123462M	FERRITE BEADS TYPE B2.3UH
L935	J2123462M	FERRITE BEADS TYPE B2.3UH
L939	J2123462M	FERRITE BEADS TYPE B2.3UH
L955	J2123462M	FERRITE BEADS TYPE B2.3UH
L957	J2123462M	FERRITE BEADS TYPE B2.3UH
L961	L380184	BUCK COIL E20/10/5
L965	J2123462M	FERRITE BEADS TYPE B2.3UH
L992	J2123462M	FERRITE BEADS TYPE B2.3UH
LA01	JBH00034	HC-330K SI LH10TK
LA02	L380176	33UH PANASONIC ELC12E330
LA03	JBH00034	HC-330K SI LH10TK
LA04	L380176	33UH PANASONIC ELC12E330
LED2	T547049	SLR-325VC LED RED
LS04	J2123103M	LAL 02 AXIAL COIL 10uH
LS201	J2122956M	COIL LAL 100UH K
LS25	J2123103M	LAL 02 AXIAL COIL 10uH
LS31	J2123103M	LAL 02 AXIAL COIL 10uH
LS42	J2123103M	LAL 02 AXIAL COIL 10uH
LS50	J2123103M	LAL 02 AXIAL COIL 10uH
LS60	J2123103M	LAL 02 AXIAL COIL 10uH
P001	J2902261	PLG-02P2R5VPWB
P10	J2902261	PLG-02P2R5VPWB
P302	J2902261	PLG-02P2R5VPWB
P303	J2902261	PLG-02P2R5VPWB
P400	J2902261	PLG-02P2R5VPWB
P701	J2661753	4 PIN PLUG WITH BASE
P802	J2902267	PLG-08P2R5V PWB
P803	J2902264	PLG-05P 2R5V PWB
P9	J2902261	PLG-02P2R5VPWB
P900	E825259	2 WAY MAIN HEADER UL BEAB
P902	J2661751	2P PIN PLUG & BASE
PA04	J2902263	PLG-04P2R5VPWB
PHONO1	E826943	QUAD PHONO SKT
PHONO2	E826944	QUAD PHONO SKT
PS01	J2902261	PLG-02P2R5VPWB
Q002	T633153	2N7002 MOSFET
Q003	J2325691R	TRS 2SC2412K T146Q/R
Q004	J2325691R	TRS 2SC2412K T146Q/R
Q005	T633153	2N7002 MOSFET
Q006	J2325691R	TRS 2SC2412K T146Q/R
Q007	J2325691R	TRS 2SC2412K T146Q/R
Q008	J2325691R	TRS 2SC2412K T146Q/R
Q011	J2325691R	TRS 2SC2412K T146Q/R
Q200	J2325691R	TRS 2SC2412K T146Q/R

A529050 PARTS LIST

I.D.	Part No.	Description
Q213	T631302	& DTC114YKAT146
Q214	T631302	& DTC114YKAT146
Q215	T631302	& DTC114YKAT146
Q216	J2328161R	TRS 2SC4265JC02TR
Q217	J2325691R	TRS 2SC2412K T146Q/R
Q330	J2325781R	TRS 2SA1037K T146Q/R
Q332A	J2325781R	TRS 2SA1037K T146Q/R
Q400	J2325691R	TRS 2SC2412K T146Q/R
Q401	J2325691R	TRS 2SC2412K T146Q/R
Q402	J2325691R	TRS 2SC2412K T146Q/R
Q403	J2325691R	TRS 2SC2412K T146Q/R
Q412	J2325781R	TRS 2SA1037K T146Q/R
Q413	J2316691R	STC-DTC144EK T146
Q501	J2325781R	TRS 2SA1037K T146Q/R
Q505	J2325781R	TRS 2SA1037K T146Q/R
Q507	J2325691R	TRS 2SC2412K T146Q/R
Q508	J2325691R	TRS 2SC2412K T146Q/R
Q509	J2325781R	TRS 2SA1037K T146Q/R
Q605	J2325691R	TRS 2SC2412K T146Q/R
Q606	J2325781R	TRS 2SA1037K T146Q/R
Q631	T636077	&IRFS530A ISOL SAMSUNG
Q631A	G884023	SPRING CLIP
Q701	T633137	TRANS BF459 MULLARD/SES
Q702	T732016	P0109DA THYRISTOR SGS
Q711	J2325781R	TRS 2SA1037K T146Q/R
Q751	J2315451	TRS-BU2508AF
Q751A	G884020	SPRING CLIP 56379-MULLARD
Q777	J2315891R	TRS JC548B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235418	POWER HEATSINK(TERNEX)
Q903B	G884020	SPRING CLIP 56379-MULLARD
Q904	T636077	&IRFS530A ISOL SAMSUNG
Q911	T636077	&IRFS530A ISOL SAMSUNG
Q912	T631309	TRANS BC557B BANDED
Q913	T633133	TRANS BF422 BAND MULL/AEG
Q919	J2315921R	TRS JC558B
Q922	J2315891R	TRS JC548B
Q923	T900796	&TL431CZ-AP SGS
Q927	T636094	MOSFET IRF640
Q927A	H224085	F9-4-220D-2LS
Q929	W024001	0.56ML SFT TIN'D COP WIRE
Q932	T633133	TRANS BF422 BAND MULL/AEG
Q951	J2315891R	TRS JC548B
Q964	T900473	SHUNT REG TL431CLP MOT/TEX
QA01	J2325691R	TRS 2SC2412K T146Q/R
QS11	J2325691R	TRS 2SC2412K T146Q/R
QS17	J2325781R	TRS 2SA1037K T146Q/R
QS20	J2325691R	TRS 2SC2412K T146Q/R
QS29	J2325781R	TRS 2SA1037K T146Q/R
QS31	J2325781R	TRS 2SA1037K T146Q/R
QS32	J2325691R	TRS 2SC2412K T146Q/R
QS40	J2325691R	TRS 2SC2412K T146Q/R
QS44	J2325781R	TRS 2SA1037K T146Q/R
QS51	J2325781R	TRS 2SA1037K T146Q/R
QS52	J2325691R	TRS 2SC2412K T146Q/R
QS61	J2325781R	TRS 2SA1037K T146Q/R
R001	J0196093R	RMC73M-1F103JR
R002	J0196043R	RMC73M-1F101JR
R004	J0196093R	RMC73M-1F103JR
R005	J0196043R	RMC73M-1F101JR
R006	J0195883R	RMC73S 2A221JR
R007	J0195001R	RMC73 2B101JR
R008	J0196093R	RMC73M-1F103JR
R009	J0196093R	RMC73M-1F103JR
R010	J0196093R	RMC73M-1F103JR
R011	J0196093R	RMC73M-1F103JR
R012	J0196093R	RMC73M-1F103JR
R013	J0196043R	RMC73M-1F101JR
R014	J0196043R	RMC73M-1F101JR
R015	J0196043R	RMC73M-1F101JR
R016	J0196043R	RMC73M-1F101JR
R017	J0196093R	RMC73M-1F103JR
R018	J0196093R	RMC73M-1F103JR
R019	J0196086R	RMC73M-1F562JR
R020	J0196093R	RMC73M-1F103JR
R021	J0196068R	RMC73M-1F102JR
R022	J0196068R	RMC73M-1F102JR
R023	J0196068R	RMC73M-1F102JR
R024	J0195927R	RMC73S 2A123JR
R025	J0196095R	RMC73M - 1F123JR
R026	J0195032R	RMC73--2B393JR 1%
R027	J0196095R	RMC73M - 1F123JR
R028	J0195927R	RMC73S 2A123JR
R029	J0195933R	RMC73S 2A223JR
R030	J0195939R	RMC73S2A393JR
R031	J0195933R	RMC73S 2A223JR
R032	J0700054M	10K 1/16W C/FILM 5%
R033	J0196093R	RMC73M-1F103JR
R036	J0700054M	10K 1/16W C/FILM 5%
R037	J0195025R	RMC73 - 2B103JR
R038	J0196093R	RMC73M-1F103JR
R039	J0700049M	4K7 1/16W C/FILM 5%
R040	J0700041M	1K 1/16W C/FILM 5%
R041	J0700041M	1K 1/16W C/FILM 5%
R042	J0195875R	RMC73S 2A101JR
R043	J0700027M	100R 1/16W C/FILM 5%
R044	J0700027M	100R 1/16W C/FILM 5%
R045	J0196043R	RMC73M-1F101JR
R046	J0700027M	100R 1/16W C/FILM 5%
R047	J0196051R	RMC73M-1F221JR
R048U	J0700027M	100R 1/16W C/FILM 5%
R052	J0195875R	RMC73S 2A101JR
R053	J0196043R	RMC73M-1F101JR
R054	J0195013R	RMC73 2B102JR
R055	J0195013R	RMC73 2B102JR
R056	J0195013R	RMC73 2B102JR
R057	J0196093R	RMC73M-1F103JR
R058	J0196093R	RMC73M-1F103JR
R059	J0196093R	RMC73M-1F103JR
R060	J0196093R	RMC73M-1F103JR

A529050 PARTS LIST

I.D.	Part No.	Description
R062	J0196093R	RMC73M-1F103JR
R063	J0196043R	RMC73M-1F101JR
R064	J0196093R	RMC73M-1F103JR
R065	J0196043R	RMC73M-1F101JR
R066	J0195894R	RMC73S2A621JR 620R
R067	J0196093R	RMC73M-1F103JR
R070	J0196093R	RMC73M-1F103JR
R071	J0196093R	RMC73M-1F103JR
R074	J0195925R	RMC73S 2A103JR
R075	J0195941R	RMC73S 2A473JR
R078	J0196093R	RMC73M-1F103JR
R079	J0196043R	RMC73M-1F101JR
R080	J0196043R	RMC73M-1F101JR
R081	J0196053R	RMC73M - 1F271JR
R082	J0196093R	RMC73M-1F103JR
R083	J0196043R	RMC73M-1F101JR
R084	J0196043R	RMC73M-1F101JR
R085	J0195875R	RMC73S 2A101JR
R090	J0700027M	100R 1/16W C/FILM 5%
R091	J0196043R	RMC73M-1F101JR
R092	J0196078R	RMC73M-1F272JR
R093	J0196043R	RMC73M-1F101JR
R094	J0196043R	RMC73M-1F101JR
R095	J0196043R	RMC73M-1F101JR
R096	J0196043R	RMC73M-1F101JR
R097	J0700027M	100R 1/16W C/FILM 5%
R098	R120330	100R 1/4W DRG NO
R099	J0196043R	RMC73M-1F101JR
R230	J0195918R	RMC73S 2A562JR
R257	J0700027M	100R 1/16W C/FILM 5%
R258	J0700027M	100R 1/16W C/FILM 5%
R259	J0195900R	RMC73S 2A102JR
R261	J0195250R	RMC73S 000R
R263	J0195885R	RMC73S 2A271JR
R264	J0195918R	RMC73S 2A562JR
R265	J0700038M	680R 1/16W C/FILM 5%
R266	J0196078R	RMC73M-1F272JR
R267	J0195018R	RMC73 2B272JR
R268	J0195910R	RMC73S-2A272JR
R269	J0195250R	RMC73S 000R
R270	J0195250R	RMC73S 000R
R271	J0195875R	RMC73S 2A101JR
R272	J0195920R	RMC73S 2A682JR
R273	J0196070R	RMC73M - 1F122JR
R274	J0196043R	RMC73M-1F101JR
R275	J0195893R	RMC73S 2A561JR
R276	J0195001R	RMC73 2B101JR
R277	J0195895R	RMC73S 2A681JR
R281	J0195885R	RMC73S 2A271JR
R282	J0195931R	RMC73S 2A183JR
R300	J0195943R	RMC73S-2A563JR
R303	J0195871R	RMC73S 2A750JR
R305	J0195871R	RMC73S 2A750JR
R306	J0195871R	RMC73S 2A750JR
R307	J0195875R	RMC73S 2A101JR

I.D.	Part No.	Description
R311	J0195871R	RMC73S 2A750JR
R314	J0195950R	RMC73S 2A104JR
R315	J0196093R	RMC73M-1F103JR
R317	J0195016R	RMC73--2B182JR 1K8 1206
R319	J0195001R	RMC73 2B101JR
R320	J0195871R	RMC73S 2A750JR
R321	J0196043R	RMC73M-1F101JR
R322	J0196043R	RMC73M-1F101JR
R323	J0195871R	RMC73S 2A750JR
R326	J0195871R	RMC73S 2A750JR
R330	J0195871R	RMC73S 2A750JR
R331	J0196043R	RMC73M-1F101JR
R332	J0195950R	RMC73S 2A104JR
R333	J0196043R	RMC73M-1F101JR
R334	J0195868R	RM73S 2A560JR 56R
R335	J0195871R	RMC73S 2A750JR
R336	J0196043R	RMC73M-1F101JR
R337	J0196043R	RMC73M-1F101JR
R338	J0195875R	RMC73S 2A101JR
R339	J0113722M	RDO5S2H750JB
R340	J0195875R	RMC73S 2A101JR
R342	J0195925R	RMC73S 2A103JR
R344	J0195906R	RMC73S--2A182JR
R346	J0700027M	100R 1/16W C/FILM 5%
R347	J0195001R	RMC73 2B101JR
R349	J0195875R	RMC73S 2A101JR
R350	J0195943R	RMC73S-2A563JR
R351	J0195895R	RMC73S 2A681JR
R352	J0196111R	RMC73M - 1F563JR
R353	J0195871R	RMC73S 2A750JR
R355	J0195871R	RMC73S 2A750JR
R356	J0195871R	RMC73S 2A750JR
R357	J0196093R	RMC73M-1F103JR
R358	J0195906R	RMC73S--2A182JR
R359	J0195871R	RMC73S 2A750JR
R360	J0196093R	RMC73M-1F103JR
R361	J0196093R	RMC73M-1F103JR
R389	J0196103R	RMC73M - 1F273JR
R390	J0195895R	RMC73S 2A681JR
R400	J0195900R	RMC73S 2A102JR
R401	J0195950R	RMC73S 2A104JR
R402	J0195945R	RMC73S 2A683JR
R403	J0195875R	RMC73S 2A101JR
R404	J0195943R	RMC73S-2A563JR
R405	J0195943R	RMC73S-2A563JR
R406	J0196059R	RMC73M-1F471JR
R407	J0195875R	RMC73S 2A101JR
R408	J0196068R	RMC73M-1F102JR
R409	J0113725M	100R RES CARBON FILM 1/2W
R410	J0196072R	RMC73M-1F152JR
R411	J0195900R	RMC73S 2A102JR
R412	J0196113R	RMC73M - 1F683JR
R413	J0196059R	RMC73M-1F471JR
R414	J0196043R	RMC73M-1F101JR
R415	J0196059R	RMC73M-1F471JR

A529050 PARTS LIST

I.D.	Part No.	Description
R417	J0195037R	RMC73 2B104JR
R418	J0196043R	RMC73M-1F101JR
R419	J0195950R	RMC73S 2A104JR
R420	J0196066R	RMC73M - 1F911JR
R421	J0196061R	RMC73M-1F561JR 1608
R422	J0196066R	RMC73M - 1F911JR
R423	J0195950R	RMC73S 2A104JR
R424	J0195891R	RMC73S 2A471JR
R425	J0196074R	RMC73M-1F182JR 1K8 0603
R426	J0196043R	RMC73M-1F101JR
R427	J0196061R	RMC73M-1F561JR 1608
R428	J0196066R	RMC73M - 1F911JR
R429	J0196068R	RMC73M-1F102JR
R430	J0196061R	RMC73M-1F561JR 1608
R431	J0196043R	RMC73M-1F101JR
R432	J0196043R	RMC73M-1F101JR
R433	J0195875R	RMC73S 2A101JR
R434	J0195875R	RMC73S 2A101JR
R435	J0196066R	RMC73M - 1F911JR
R436	J0796491R	RMC73M-000R
R437	J0796491R	RMC73M-000R
R438	J0196061R	RMC73M-1F561JR 1608
R439	J0196061R	RMC73M-1F561JR 1608
R440	J0196066R	RMC73M - 1F911JR
R441	J0196084R	RMC73M-1F472JR
R442	J0700034M	330R 1/16W C/FILM 5%
R446	J0195950R	RMC73S 2A104JR
R447	J0195891R	RMC73S 2A471JR
R448	J0196043R	RMC73M-1F101JR
R454	J0195950R	RMC73S 2A104JR
R465	J0196093R	RMC73M-1F103JR
R467	J0196093R	RMC73M-1F103JR
R469	J0195875R	RMC73S 2A101JR
R470	J0195875R	RMC73S 2A101JR
R471	J0700027M	100R 1/16W C/FILM 5%
R472	J0195001R	RMC73 2B101JR
R473	J0195001R	RMC73 2B101JR
R474	J0196043R	RMC73M-1F101JR
R475	J0196043R	RMC73M-1F101JR
R476	J0196043R	RMC73M-1F101JR
R477	J0700027M	100R 1/16W C/FILM 5%
R478	J0700027M	100R 1/16W C/FILM 5%
R479	J0700027M	100R 1/16W C/FILM 5%
R480	J0700027M	100R 1/16W C/FILM 5%
R481	J0700027M	100R 1/16W C/FILM 5%
R482	J0700027M	100R 1/16W C/FILM 5%
R483	J0195875R	RMC73S 2A101JR
R484	J0195875R	RMC73S 2A101JR
R485	J0700027M	100R 1/16W C/FILM 5%
R486	J0195925R	RMC73S 2A103JR
R487	J0700027M	100R 1/16W C/FILM 5%
R488	J0195925R	RMC73S 2A103JR
R489	J0700027M	100R 1/16W C/FILM 5%
R490	J0700027M	100R 1/16W C/FILM 5%
R491	J0195925R	RMC73S 2A103JR
R493	J0196068R	RMC73M-1F102JR
R496	J0196088R	RMC73M-1F682JR
R497	J0196105R	RMC73M-1F333JR
R498	J0196043R	RMC73M-1F101JR
R499	J0196051R	RMC73M-1F221JR
R500	J0195929R	RMC73S 2A153JR
R501	J0195025R	RMC73 - 2B103JR
R502	J0196090R	RMC73M-1F822JR 8K2 0603
R504	J0196088R	RMC73M-1F682JR
R509	J0195939R	RMC73S2A393JR
R532	J0195875R	RMC73S 2A101JR
R533	J0195900R	RMC73S 2A102JR
R534	J0195875R	RMC73S 2A101JR
R535	J0195875R	RMC73S 2A101JR
R536	J0195875R	RMC73S 2A101JR
R537	J0195875R	RMC73S 2A101JR
R538	J0700027M	100R 1/16W C/FILM 5%
R539	J0700027M	100R 1/16W C/FILM 5%
R540	J0195875R	RMC73S 2A101JR
R541	J0195057R	RMC73 2B431JR 430R 1206
R542	J0700027M	100R 1/16W C/FILM 5%
R543	J0700027M	100R 1/16W C/FILM 5%
R544	J0195887R	RMC73S 2A331JR
R545	J0195875R	RMC73S 2A101JR
R546	J0196043R	RMC73M-1F101JR
R547	J0196043R	RMC73M-1F101JR
R548	J0195007R	RMC73--2B331JR
R549	J0195879R	RMC73S 2A151JR
R550	J0196049R	RMC73M-1F181JR 180R 0603
R560	J0195001R	RMC73 2B101JR
R571	J0196068R	RMC73M-1F102JR
R586	J0195891R	RMC73S 2A471JR
R589	J0195910R	RMC73S-2A272JR
R600	J0196093R	RMC73M-1F103JR
R601	R100330	1R0 1/4W DRG NO
R602	J0113684M	RNL-2R2J1-02LT
R603	J0113684M	RNL-2R2J1-02LT
R605	J0700075M	390K 1/16W C/FILM 5%
R606	J0195941R	RMC73S 2A473JR
R607	J0196043R	RMC73M-1F101JR
R608	J0195875R	RMC73S 2A101JR
R612	R237330	2K7 1/4W DRG NO
R613	R658330	680K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R616	J0196068R	RMC73M-1F102JR
R634	R232330	2K2 1/4W DRG NO
R635	R232330	2K2 1/4W DRG NO
R636	J0700051M	5K6 1/16W C/FILM 5%
R637	R120330	100R 1/4W DRG NO
R638	J0700049M	4K7 1/16W C/FILM 5%
R639	J0700049M	4K7 1/16W C/FILM 5%
R666	J0196068R	RMC73M-1F102JR
R667	J0700049M	4K7 1/16W C/FILM 5%
R702	R333330	3K3 1/4W DRG NO
R704	R648330	68K 1/4W DRG NO

A529050 PARTS LIST

I.D.	Part No.	Description
R706	R437571	4K7 2W 5% M02SL
R707	R135330	1K5 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R712	J0195925R	RMC73S 2A103JR
R713	J0100069M	RES FLM 1/8W 1.5K
R714	J0113748M	RD14S2H821JB
R715	J0110163S	RS08B3A562JS
R716	J0700054M	10K 1/16W C/FILM 5%
R717	R252330	220K 1/4W DRG NO
R718	R254736	240K 1/4W M/F MFR4 1%
R719	R447736	47K 1/4W 1% MFR4
R720	J0140933S	RSL-472J7WS(BSR-Z)
R724	J0110273S	RSO8B3D153JS
R725	R232570	2K2 1W 5% MO1SL
R735	J0147622	RW99J3Y3R3KM
R736	R433330	4K3 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R738	R232330	2K2 1/4W DRG NO
R740	R457330	470K 1/4W DRG NO
R745	R437330	4K7 1/4W DRG NO
R746	R120571	100R 2W 5% M02SL
R752	R353330	330K 1/4W DRG NO
R757	R447330	47K 1/4W DRG NO
R759	R536330	5K6 1/4W DRG NO
R764	R150330	100K 1/4W DRG NO
R765	J0700027M	100R 1/16W C/FILM 5%
R767	J0195875R	RMC73S 2A101JR
R768	J0196093R	RMC73M-1F103JR
R769	J0195902R	RMC73S 2A122JR
R770	R140330	10K 1/4W DRG NO
R776	R257330	270K 1/4W DRG NO
R778	R145330	15K 1/4W DRG NO
R779	R120571	100R 2W 5% M02SL
R780	R232330	2K2 1/4W DRG NO
R901	R242571	22K 2W M02S
R902	R546330	56K 1/4W DRG NO
R903	R222330	220R 1/4W DRG NO
R905	R150330	100K 1/4W DRG NO
R906	R130330	1K 1/4W DRG NO
R908	R130330	1K 1/4W DRG NO
R909	J0147642	RW99J3Y220JM 22R 7W
R911	R132725	1K2 MRS16T 1% M/F 1/16W
R912	R842736	82K 1% MF MFR4
R913	R447330	47K 1/4W DRG NO
R915	R658725	680K MRS16T 1% M/F
R916	J0700049M	4K7 1/16W C/FILM 5%
R917	R658725	680K MRS16T 1% M/F
R920	R140330	10K 1/4W DRG NO
R921	R546736	56K MFR4 1% 1/4W
R922	R247725	27K MRS16T1% M/FILM
R927	J0110281S	RS08B3D333JS
R932	R120330	100R 1/4W DRG NO
R933	J0700049M	4K7 1/16W C/FILM 5%
R941	R536330	5K6 1/4W DRG NO
R942	R521330	510R 1/4W DRG NO
R944	R244725	24K MRS16T 1% 1/16W
R945	R140725	10K MRS16T 1% M/FILM
R946	J0147544	RW99J3H150JM 15R 5W
R950	R433725	4K3 MRS16T 1/16W 1%
R951	R407330	4R7 1/4W DRG NO
R952	J0700058M	22K 1/16W C/FILM 5%
R953	J0700049M	4K7 1/16W C/FILM 5%
R954	J0700049M	4K7 1/16W C/FILM 5%
R956	R000618	0.5R 2W WIRE WOUND 5%
R957	R323330	330R 1/4W DRG NO
R958	R842736	82K 1% MF MFR4
R959	R556725	560K MRS16T 1% M/FILM
R960	R133725	1K3 MRS16T 1% M/FILM
R961	J0700052M	6K8 1/16W C/FILM 5%
R962	R130330	1K 1/4W DRG NO
R963	J0700041M	1K 1/16W C/FILM 5%
R966	R130330	1K 1/4W DRG NO
R967	R252330	220K 1/4W DRG NO
R968	R000618	0.5R 2W WIRE WOUND 5%
R969	R242330	22K 1/4W DRG NO
R970	R120330	100R 1/4W DRG NO
R971	J0144050	ERF5ZK122 1K2 KOA RES 5W
R972	R150744	&100K 3W PRO3 M/F LANCET
R975	J0700041M	1K 1/16W C/FILM 5%
R976	R323330	330R 1/4W DRG NO
R977	R120330	100R 1/4W DRG NO
R978	R323330	330R 1/4W DRG NO
R980	R100551	1R 1/4W FR8225(TDK)-BEAB-
R981	J0700064M	56K 1/16W C/FILM 5%
R982	R319330	39R 1/4W DRG NO
R985	J0187072M	2K0 1/16W PHILIPS
R986	R150330	100K 1/4W DRG NO
R987	R319330	39R 1/4W DRG NO
R988	J0700067M	100K 1/16W C/FILM 5%
R989	E441045	PTC TYPE 2322-662-96624
R990	R316330	36R 1/4W
R991	R353714	330K 1/2W METAL FLM-BEAB
R992	J0700058M	22K 1/16W C/FILM 5%
R993	J0700056M	15K 1/16W C/FILM 5%
R994	R323330	330R 1/4W DRG NO
R996	R427330	470R 1/4W DRG NO
R997	J0187092M	RD14S1J133JB
R998	R323571	330R 2W 5% MO2S F
R999	R170727	10M 1W VR68 UL BEAB
RA01	J0700027M	100R 1/16W C/FILM 5%
RA02	J0196093R	RMC73M-1F103JR
RA03	J0700047M	3K3 1/16W C/FILM 5%
RA04	J0700055M	12K 1/16W C/FILM 5%
RA05	R120330	100R 1/4W DRG NO
RA06	J0196101R	RMC73M-1F223JR 1608
RA07	J0196111R	RMC73M - 1F563JR
RA08	J0196113R	RMC73M - 1F683JR
RA09	J0196101R	RMC73M-1F223JR 1608
RA10	J0196111R	RMC73M - 1F563JR
RA11	J0196084R	RMC73M-1F472JR

A529050 PARTS LIST

I.D.	Part No.	Description
RA13	J0196093R	RMC73M-1F103JR
RA14	R120330	100R 1/4W DRG NO
RA15	J0196084R	RMC73M-1F472JR
RA16	J0196104R	RMC73M-1F303JR 30K 0603
RA17	J0195953R	RMC73S-2A134JR 130K
RA18	J0700012M	6R8 1/16W C/FILM 5%
RA19	J0195025R	RMC73 - 2B103JR
RA20	J0187086M	RD14S1J752JB
RA21	J0195025R	RMC73 - 2B103JR
RA22	J0187086M	RD14S1J752JB
RA23	J0196078R	RMC73M-1F272JR
RA24	J0700054M	10K 1/16W C/FILM 5%
RA25	J0196093R	RMC73M-1F103JR
RA26	J0195916R	RMC73S 2A472JR
RA27	R427748	470R 3W PRO3 5% TAPED
RA31	J0796491R	RMC73M-000R
RA32	J0196078R	RMC73M-1F272JR
RA33	J0195945R	RMC73S 2A683JR
RA34	J0195945R	RMC73S 2A683JR
RA35	J0195910R	RMC73S-2A272JR
RA36	J0196045R	RMC73M-1F121JR 120R 1608
RA37	J0196045R	RMC73M-1F121JR 120R 1608
RA38	J0196118R	RMC73M-1F104JR 100K
RA39	J0196030R	RMC73M-1F330JR 33R
RA40	J0196118R	RMC73M-1F104JR 100K
RA41	J0196030R	RMC73M-1F330JR 33R
RA45	J0113725M	100R RES CARBON FILM 1/2W
RM01	J0196043R	RMC73M-1F101JR
RM02	J0196043R	RMC73M-1F101JR
RM05	J0195001R	RMC73 2B101JR
RM06	J0196043R	RMC73M-1F101JR
RM07	J0700027M	100R 1/16W C/FILM 5%
RM08	J0196043R	RMC73M-1F101JR
RM09	J0196043R	RMC73M-1F101JR
RM10	J0196043R	RMC73M-1F101JR
RM13	J0196093R	RMC73M-1F103JR
RM14	J0196093R	RMC73M-1F103JR
RM15	J0195025R	RMC73 - 2B103JR
RM16	J0195025R	RMC73 - 2B103JR
RM17	J0196093R	RMC73M-1F103JR
RM51	J0700054M	10K 1/16W C/FILM 5%
RS16	J0195916R	RMC73S 2A472JR
RS17	J0196068R	RMC73M-1F102JR
RS18	J0196068R	RMC73M-1F102JR
RS19	J0196068R	RMC73M-1F102JR
RS20	J0195950R	RMC73S 2A104JR
RS21	J0195916R	RMC73S 2A472JR
RS22	J0196068R	RMC73M-1F102JR
RS23	J0195900R	RMC73S 2A102JR
RS24	J0195900R	RMC73S 2A102JR
RS25	J0196118R	RMC73M-1F104JR 100K
RS30	J0195900R	RMC73S 2A102JR
RS32	J0196068R	RMC73M-1F102JR
RS33	J0196118R	RMC73M-1F104JR 100K
RS35	J0196084R	RMC73M-1F472JR
RS40	J0700049M	4K7 1/16W C/FILM 5%
RS41	J0195900R	RMC73S 2A102JR
RS46	J0196118R	RMC73M-1F104JR 100K
RS47	J0196068R	RMC73M-1F102JR
RS49	J0700041M	1K 1/16W C/FILM 5%
RS50	J0196068R	RMC73M-1F102JR
RS51	J0196118R	RMC73M-1F104JR 100K
RS53	J0196068R	RMC73M-1F102JR
RS54	J0196068R	RMC73M-1F102JR
RS55	J0700049M	4K7 1/16W C/FILM 5%
RS60	J0196118R	RMC73M-1F104JR 100K
RS61	J0196084R	RMC73M-1F472JR
RS62	J0700041M	1K 1/16W C/FILM 5%
RS64	J0195900R	RMC73S 2A102JR
RS65	J0195900R	RMC73S 2A102JR
RS91	J0195871R	RMC73S 2A750JR
S001	E139506	5 WAY TACT SWITCH
SCART1	E826946	A20 DOUBLE SCART
SCART2	E826945	SINGLE SCART METALLO
SHROUD	X321241	&ACTUATOR SHROUD
SW900	J2634732	SWITCH SDD-FC BEAB
T700	JBW02021	FBT HFL1735LD 32" BEAB
T700A	G201316	M3 X 16 SCREW
T700B	N332067	SPACER
T702	J2260291U	H DRIVE TRANSFORMER TAW
T900	L380183	SMT4 +/- 17V BEAB
T902	L380181	SW MODE XXXX CT286D8 BEAB
VR904	E311108	500R POT HORIZONTAL TAPE
VR964	J0160211R	EVND8AA03B13-TAPE(PANA)
W002	EC5A100A	7/0.2MM S000030
W003	EC5A060A	7/0.2MM S000030
W005	EC530603	7/0.2MM S000010
W008	EC5A120A	7/0.2 S000030
W009	EC5A060A	7/0.2MM S000030
W010	EC530903	7/0.2MM S000029
W017	EC530503	7/0.2MM S000029
W018	EC530203	7/0.2MM S000010
W019	EC530603	7/0.2MM S000010
W020	EC530303	7/0.2MM S000010
W021	EC5A120A	7/0.2 S000030
W022	EC530903	7/0.2MM S000029
W023	EC530203	7/0.2MM S000010
W024	EC5A110A	7/0.2MM S000030
W025	EC531603	7/0.2 S000029
W026	EC531603	7/0.2 S000029
X001	E516081F	CRYSTAL 6MHZ
X200	E518054	K9453M
X219	E518053	K3953M
X305	L420187	BLM11A102S
X513	E516030F	12MHz X'TAL NDK 5MM LEG
Z005	T536219	BZX79B3V3~PHILIPS~
Z006	T536312	PDZ-B 3.6B 2% SMT ZENER
Z007	T536279	BZX284-C5V6 5% S MOUNT
Z008	T536279	BZX284-C5V6 5% S MOUNT
Z014	T536312	PDZ-B 3.6B 2% SMT ZENER

A529050 PARTS LIST

I.D.	Part No.	Description
Z404	T536181	BZX79C 13V~PHILIPS~
Z501	T536184	BZX79C 9V1~PHILIPS~
Z502	T536184	BZX79C 9V1~PHILIPS~
Z503	T536184	BZX79C 9V1~PHILIPS~
Z504	T536184	BZX79C 9V1~PHILIPS~
Z505	T536284	BZX284-C9V1
Z506	T536284	BZX284-C9V1
Z507	T536277	BZX284-C 4V7 5%
Z600	T536178	BZX79C 3V3~PHILIPS~
Z601	T536178	BZX79C 3V3~PHILIPS~
Z603A	T536173	BZX79C18V~PHILIPS~
Z603B	T536215	BZX 79C 33V~PHILIPS~
Z604	T536259	BZX79C56V
Z607	T536284	BZX284-C9V1
Z608	T536284	BZX284-C9V1
Z610	T536173	BZX79C18V~PHILIPS~
Z615	T536172	BZX79C27V~PHILIPS~
Z616	T536280	BZX284-C6V2
Z703	T536235	BZX79B18V~PHILIPS~
Z713	J2339251M	HZS36-ILT
Z741	T536259	BZX79C56V
Z744	T536227	BZX79B7V5~PHILIPS~
Z900	T536266	BZV85-C27V
Z927	T536173	BZX79C18V~PHILIPS~
Z942	T536179	BZX79C 6V2~PHILIPS~
Z964	T536236	BZX79B22V~PHILIPS~
Z990	T536173	BZX79C18V~PHILIPS~
Z991	T536173	BZX79C18V~PHILIPS~
Z992	T536173	BZX79C18V~PHILIPS~
ZA01	T536279	BZX284-C5V6 5% S MOUNT
ZA08	T536268	BZV85-C22V
ZA10	T536172	BZX79C27V~PHILIPS~
ZR048A	W470200	1MM 1/D SLEEVING BLACK
ZR048B	W470200	1MM 1/D SLEEVING BLACK
ZS14	T536271	BZX284-C2V7
ZS25	T536271	BZX284-C2V7
ZS31	T536271	BZX284-C2V7
ZS42	T536271	BZX284-C2V7
ZS51	T536271	BZX284-C2V7
ZS60	T536271	BZX284-C2V7
ZZA08	W470200	1MM 1/D SLEEVING BLACK

A529070 PARTS LIST

I.D.	Part No.	Description
B800	PC55202	A20 CRT BASE PCB BEAB
C801	J0253975F	47UF 250V SME
C802	J0890082R	CCT391B50DS (MURATA)
C803	J0880016R	POLY CAP FLM 0.1UF 50V
C804	J0880016R	POLY CAP FLM 0.1UF 50V
C805	J0228058R	CC73SCH1H151JR 150PF
C806	J0228058R	CC73SCH1H151JR 150PF
C807	J0228058R	CC73SCH1H151JR 150PF
C809	J0800294R	ELECT CAP 10UF 50V SMG
C810	J0253968R	CAP 1uf 250V SME
C814U	C242710	CAP 22N 365-41223 MULLARD
C815	J0228046R	CC73SCH1H470JR
C816	J0228048R	CC73SCH1H560JR
C817	J0228046R	CC73SCH1H470JR
C818	J0800292R	CAP ELECT 10UF 25V SMG
C819	J0228038R	CC73SCH1H220JR
C820	J0228038R	CC73SCH1H220JR
C821	J0228038R	CC73SCH1H220JR
C824	J0893048R	CKM-223K500B-CNT2125
C826	J0800284R	CAP ELECTRO 3.3UF-M 50V
C827	J0800284R	CAP ELECTRO 3.3UF-M 50V
C830	J0228044R	CC73SCH1H390JR
C833	J0893027R	CKM-104K250B-CNT2125
C840	J0228046R	CC73SCH1H470JR
C841	J0228046R	CC73SCH1H470JR
C842	J0228046R	CC73SCH1H470JR
C843	J0800327R	ELECT CAP 100UF 25V SMG
C844	J0893027R	CKM-104K250B-CNT2125
C845	J0800291R	CAP ELEC 10uF 16V SMG
C846	J0880016R	POLY CAP FLM 0.1UF 50V
C860	J0800327R	ELECT CAP 100UF 25V SMG
C861	J0880016R	POLY CAP FLM 0.1UF 50V
C864	J0893027R	CKM-104K250B-CNT2125
C865	J0228048R	CC73SCH1H560JR
C867	J0893027R	CKM-104K250B-CNT2125
C868	J0893027R	CKM-104K250B-CNT2125
C870	C242711	22N 365 81223 POLY CAP
C871	C242711	22N 365 81223 POLY CAP
C872	C140711	10N 10% POLY CAPACITOR
C873	C150711	CAP 100N 36521104 100V POL
C874	C150711	CAP 100N 36521104 100V POL
C875	J0253973F	ELEC CAP SME 22UF 250V
C876	J0800321R	ELECT CAP 47UF 50V SMG
C877	J0800321R	ELECT CAP 47UF 50V SMG
C880	JAJ00138R	CC-222K202R 2N2 2KV
C8A1	J0800317R	CP ELECTRO 47UF SMG 16
D800	OPTION	NOT FITTED
D802	J2348921M	DIODE 1N4531
D803	J2348921M	DIODE 1N4531
D804	J2348921M	DIODE 1N4531
D805	J2348921M	DIODE 1N4531
D808	T531067	DIODE BAS216 S/MOUNT
D809	T531067	DIODE BAS216 S/MOUNT
D810	T531067	DIODE BAS216 S/MOUNT
D811	T531067	DIODE BAS216 S/MOUNT

I.D.	Part No.	Description
D825	J2348921M	DIODE 1N4531
D834U	J2331913M	DIODE 1SS83
D835U	J2331913M	DIODE 1SS83
D836	J2331913M	DIODE 1SS83
D837	J2331913M	DIODE 1SS83
D838U	J2331913M	DIODE 1SS83
D839U	J2331913M	DIODE 1SS83
D840	J2331913M	DIODE 1SS83
D841	J2331913M	DIODE 1SS83
D842	J2331913M	DIODE 1SS83
D843	J2331913M	DIODE 1SS83
D844	J2331913M	DIODE 1SS83
D845	J2331913M	DIODE 1SS83
D846	J2348921M	DIODE 1N4531
D847	J2348921M	DIODE 1N4531
D853	J2343963M	MPG06J (TAPE) GI
D854	J2343963M	MPG06J (TAPE) GI
D861	T531067	DIODE BAS216 S/MOUNT
D862	T531067	DIODE BAS216 S/MOUNT
D864	T531067	DIODE BAS216 S/MOUNT
D865	T531067	DIODE BAS216 S/MOUNT
D8A1	J2348921M	DIODE 1N4531
E800	E843285	GROUND LEAD MALE
E801	JEY00632	CRT SOCKET BEAB
G800	J2340039	SPARK GAP - FORMED
G801U	J2340039	SPARK GAP - FORMED
G802U	J2340039	SPARK GAP - FORMED
G803U	J2340039	SPARK GAP - FORMED
I800	T900756	L78M15CV 5OOmA
IC801	T900990	TDA6108
IC801A	H224087	HEATSINK
IC801B	J4520889	SCREW
K808	J0195248R	RMC73--000R
K834	J0195250R	RMC73S 000R
K835	J0195250R	RMC73S 000R
K836	J0195250R	RMC73S 000R
L801	L300012	RL8010-680J-UL-HUL-BO6
L805	J2123098M	LAL024R7KB
L806	J2123462M	FERRITE BEADS TYPE B2.3UH
L807	J2123462M	FERRITE BEADS TYPE B2.3UH
L808	J2123461M	FERRITE BEAD 0.8uH
L809	J2123461M	FERRITE BEAD 0.8uH
L810	J2123461M	FERRITE BEAD 0.8uH
L811	J2122239M	AXIAL COIL 10UH 10%
L813	J2122239M	AXIAL COIL 10UH 10%
L814	J2122239M	AXIAL COIL 10UH 10%
L841	J2123098M	LAL024R7KB
L842	J2123098M	LAL024R7KB
L843	J2122253M	AXIAL COIL 100uH K TAPE
P800U	E843241	CPT EARTH LEAD~GREENLIGHT
P802	J2902267	PLG-08P2R5V PWB
P803	J2902266	PLG-07P2R5V PWB
P805	J2902263	PLG-04P2R5VPWB
P806	J2661752	3P PLUG PIN/BASE UL BEAB
Q840	J2325691R	TRS 2SC2412K T146Q/R

A529070 PARTS LIST

I.D.	Part No.	Description
Q841	J2325691R	TRS 2SC2412K T146Q/R
Q842	J2325691R	TRS 2SC2412K T146Q/R
Q843	J2325691R	TRS 2SC2412K T146Q/R
Q844	J2325781R	TRS 2SA1037K T146Q/R
Q845	J2325691R	TRS 2SC2412K T146Q/R
Q846	J2315921R	TRS JC558B
Q847	J2315891R	TRS JC548B
Q848	J2315921R	TRS JC558B
Q849	J2315891R	TRS JC548B
Q850	J2325781R	TRS 2SA1037K T146Q/R
Q851	J2325691R	TRS 2SC2412K T146Q/R
Q853	J2315391	TRS-2SC4793
Q853A	J3446473	HEATSINK H30 P10
Q853B	J4520883	M3X12 WITH SPRG WASHER
Q854	J2315381	TRS-2SA1837
Q854A	J3446473	HEATSINK H30 P10
Q854B	J4520883	M3X12 WITH SPRG WASHER
Q860	J2325691R	TRS 2SC2412K T146Q/R
Q861	J2325691R	TRS 2SC2412K T146Q/R
Q864	J2325781R	TRS 2SA1037K T146Q/R
Q865	J2325781R	TRS 2SA1037K T146Q/R
Q866	J2325691R	TRS 2SC2412K T146Q/R
Q867	J2325691R	TRS 2SC2412K T146Q/R
Q868	J2325781R	TRS 2SA1037K T146Q/R
Q890	J2315381	TRS-2SA1837
Q891	T633133	TRANS BF422 BAND MULL/AEG
Q892	T633143	BF423L PHILIPS
Q893	J2327773R	2SC3413 TRANSISTOR
Q894	J2327753R	2SA1390 TRANSISTOR
R802	R333330	3K3 1/4W DRG NO
R803	J0195900R	RMC73S 2A102JR
R810	J0195900R	RMC73S 2A102JR
R812	J0700041M	1K 1/16W C/FILM 5%
R813	J0195250R	RMC73S 000R
R815	J0195875R	RMC73S 2A101JR
R816	J0195875R	RMC73S 2A101JR
R817	J0195875R	RMC73S 2A101JR
R818	J0195910R	RMC73S-2A272JR
R819	J0700055M	12K 1/16W C/FILM 5%
R820	J0195950R	RMC73S 2A104JR
R821	J0700041M	1K 1/16W C/FILM 5%
R822	J0195900R	RMC73S 2A102JR
R823	J0195898R	RMC73S 2A911JR
R824	J0113735M	RD14S2H271JB
R825	J0700044M	1K8 1/16W C/FILM 5%
R826	J0100059M	RD14S2B561JB
R827	J0195906R	RMC73S--2A182JR
R828	R309731	3.9R MFR5 2% M/FILM
R829	J0195906R	RMC73S--2A182JR
R830	J0195893R	RMC73S 2A561JR
R831	J0195906R	RMC73S--2A182JR
R832	J0113744M	RD14S2H561JB
R837	J0195908R	RMC73S 2A222JR
R838	J0113744M	RD14S2H561JB
R840	J0195902R	RMC73S 2A122JR
R841	J0195902R	RMC73S 2A122JR
R842	J0195902R	RMC73S 2A122JR
R843	J0195893R	RMC73S 2A561JR
R844	J0195893R	RMC73S 2A561JR
R845	J0195891R	RMC73S 2A471JR
R846	J0195877R	RMC73S--2A121JR
R847	J0195893R	RMC73S 2A561JR
R848	J0195893R	RMC73S 2A561JR
R849	J0195891R	RMC73S 2A471JR
R850	J0195877R	RMC73S--2A121JR
R851	J0195893R	RMC73S 2A561JR
R852	J0195893R	RMC73S 2A561JR
R853	J0195891R	RMC73S 2A471JR
R854	J0195877R	RMC73S--2A121JR
R860	J0195875R	RMC73S 2A101JR
R861	J0195902R	RMC73S 2A122JR
R862	J0195891R	RMC73S 2A471JR
R863	J0195885R	RMC73S 2A271JR
R864	J0195931R	RMC73S 2A183JR
R865	J0195908R	RMC73S 2A222JR
R867	J0195250R	RMC73S 000R
R869	J0195893R	RMC73S 2A561JR
R870	J0195893R	RMC73S 2A561JR
R871	J0195883R	RMC73S 2A221JR
R872	J0195858R	RMC73S 2A220JR 22R
R873	J0195858R	RMC73S 2A220JR 22R
R874	J0195891R	RMC73S 2A471JR
R875	J0195887R	RMC73S 2A331JR
R876	J0195916R	RMC73S 2A472JR
R877	J0195916R	RMC73S 2A472JR
R878	J0195889R	RMC73S 2A391JR
R880	R135330	1K5 1/4W DRG NO
R881	R150330	100K 1/4W DRG NO
R882	R150330	100K 1/4W DRG NO
R883	R135330	1K5 1/4W DRG NO
R884	J0113717M	RD05S2H470JB
R885	J0113717M	RD05S2H470JB
R886	R323570	330R 1W 5% MO1S F
R887	R207330	2R7 1/4W DRG NO
R888	R207330	2R7 1/4W DRG NO
R890	J0113733M	RD14S2H221JB
R892	J0195912R	RMC73S 2A332JR
R8A1	R447570	47K 1W 5% M01S F
R8A2	J0700063M	47K 1/16W C/FILM 5%
R8A3	J0700063M	47K 1/16W C/FILM 5%
R8A4	J0700072M	220K 1/16W C/FILM 5%
R8A5	J0700054M	10K 1/16W C/FILM 5%
R8A6	J0700049M	4K7 1/16W C/FILM 5%
R8A7	J0700064M	56K 1/16W C/FILM 5%
R8B3	J0113744M	RD14S2H561JB
R8B8	J0700048M	3K9 1/16W C/FILM 5%
R8B9	J0700048M	3K9 1/16W C/FILM 5%
R8C0	J0700048M	3K9 1/16W C/FILM 5%
Z804U	T536184	BZX79C 9V1~PHILIPS~
Z805U	T536184	BZX79C 9V1~PHILIPS~

A529070 PARTS LIST

I.D.	Part No.	Description
Z806U	T536184	BZX79C 9V1~PHILIPS~
Z807	T536186	BZX79C 8V2~PHILIPS~

A529270 PARTS LIST

I.D.	Part No.	Description
#15	E573018	FERRITE CLAMP CORE
#200	J3731082	PURSE LOCK
#27	L350016	FERRITE CORE
#270	J2123462M	FERRITE BEADS TYPE B2.3UH
#40	E573018	FERRITE CLAMP CORE
#4069	J3731082	PURSE LOCK
#4070	G864006	CABLE TIE T18R
#500	E573018	FERRITE CLAMP CORE
#5000	N937053	CHASSIS FRAME
#5071	G291311	3X12 BT SCREW (BLACK)
#5072	G291311	3X12 BT SCREW (BLACK)
#5073	G291311	3X12 BT SCREW (BLACK)
#5075	N332067	SPACER
#5076	G291311	3X12 BT SCREW (BLACK)
#67	J3731082	PURSE LOCK
#68	J3731082	PURSE LOCK
#802	G864006	CABLE TIE T18R
#E802	JBM00041	FERRITE CORES BP53RB
AV300	JEU00581	PHONO-S/VHS CONNECTOR
B001	PC55002	A20 MAIN PCB BEAB
C001	J0893179R	CKM-104K160B-CNT1608
C002	J0893027R	CKM-104K250B-CNT2125
C003	J0800271R	ELECT CAP 0.1UF 50V SMG
C004	J0800282R	CAP ELECTRO 2.2UF-M 50V
C005	J0800291R	CAP ELEC 10uF 16V SMG
C007	J0800282R	CAP ELECTRO 2.2UF-M 50V
C008	J0800291R	CAP ELEC 10uF 16V SMG
C009	J0800291R	CAP ELEC 10uF 16V SMG
C010	J0893179R	CKM-104K160B-CNT1608
C011	J0893179R	CKM-104K160B-CNT1608
C012	J0893027R	CKM-104K250B-CNT2125
C013	J0227219R	CK73B1H104KR 100N 1206
C014	J0800317R	CP ELECTRO 47UF SMG 16
C015	J0893179R	CKM-104K160B-CNT1608
C016	J0228042R	CC73SCH1H330JR
C017	J0228042R	CC73SCH1H330JR
C019	J0893222R	CKM-103K500B-CNT1608
C020	J0800271R	ELECT CAP 0.1UF 50V SMG
C202	J0800364F	CAP ELECT 1000UF 50V SMG
C203	J0800361F	CAP ELEC 1000UF-M SMG 16V
C204	J0227219R	CK73B1H104KR 100N 1206
C205	J0800317R	CP ELECTRO 47UF SMG 16
C206	J0893044R	CKM 103K500B CNT2125
C208	J0800291R	CAP ELEC 10uF 16V SMG
C209	J0893044R	CKM 103K500B CNT2125
C210	J0893222R	CKM-103K500B-CNT1608
C211	J0893123R	CC73MCH1H560JR
C212	J0893113R	CC73MCH1H100C
C213	J0893044R	CKM 103K500B CNT2125
C215	J0893222R	CKM-103K500B-CNT1608
C220	J0893044R	CKM 103K500B CNT2125
C301	J0800352R	ELEC CAP 470UF 10V SMG
C302	J0227009R	CK73B1H102KR 1N 1206
C303	J0893027R	CKM-104K250B-CNT2125
C304	J0893027R	CKM-104K250B-CNT2125
C305	J0880194R	0.1UF 50V +-5% (100N)
C309	J0800352R	ELEC CAP 470UF 10V SMG
C310	J0893031R	CKM 102K500B CNT2125
C312	J0893179R	CKM-104K160B-CNT1608
C313	J0893027R	CKM-104K250B-CNT2125
C318	J0893027R	CKM-104K250B-CNT2125
C324	J0893179R	CKM-104K160B-CNT1608
C325	J0893179R	CKM-104K160B-CNT1608
C326	J0893179R	CKM-104K160B-CNT1608
C327	J0880194R	0.1UF 50V +-5% (100N)
C328	J0893027R	CKM-104K250B-CNT2125
C329	J0893027R	CKM-104K250B-CNT2125
C331	J0800326R	CEL-101M160WMFT
C332	J0800317R	CP ELECTRO 47UF SMG 16
C345	J0227219R	CK73B1H104KR 100N 1206
C369	J0800326R	CEL-101M160WMFT
C370	J0893027R	CKM-104K250B-CNT2125
C371	J0800326R	CEL-101M160WMFT
C372	J0893027R	CKM-104K250B-CNT2125
C373	J0800326R	CEL-101M160WMFT
C374	J0227219R	CK73B1H104KR 100N 1206
C403	J0893126R	CCM-101J500CHCNT1608
C404	J0800294R	ELECT CAP 10UF 50V SMG
C405	J0893031R	CKM 102K500B CNT2125
C406	J0228054R	CC73SCH1H101JR
C407	J0800294R	ELECT CAP 10UF 50V SMG
C408	J0893031R	CKM 102K500B CNT2125
C410	J0227009R	CK73B1H102KR 1N 1206
C411	J0228054R	CC73SCH1H101JR
C412	J0893031R	CKM 102K500B CNT2125
C413	J0228054R	CC73SCH1H101JR
C414	J0800294R	ELECT CAP 10UF 50V SMG
C415	J0893031R	CKM 102K500B CNT2125
C416	J0800294R	ELECT CAP 10UF 50V SMG
C417	J0893208R	CKM-102K500B-CNT1608
C420	J0800291R	CAP ELEC 10uF 16V SMG
C422	J0893031R	CKM 102K500B CNT2125
C423	J0893027R	CKM-104K250B-CNT2125
C424	J0800291R	CAP ELEC 10uF 16V SMG
C425	J0893027R	CKM-104K250B-CNT2125
C431	J0227449R	CK73B1E334ZR 330N 25V
C432	J0227449R	CK73B1E334ZR 330N 25V
C433	J0227449R	CK73B1E334ZR 330N 25V
C434	J0227449R	CK73B1E334ZR 330N 25V
C438	J0893179R	CKM-104K160B-CNT1608
C439	C353883	GRM40Y5V334Z16PT
C441	J0227449R	CK73B1E334ZR 330N 25V
C442	J0227449R	CK73B1E334ZR 330N 25V
C443	J0893248R	CKM-334Z160B-CNT1608
C444	C353883	GRM40Y5V334Z16PT
C445	C353883	GRM40Y5V334Z16PT
C446	C353883	GRM40Y5V334Z16PT
C447	C353883	GRM40Y5V334Z16PT
C448	C353883	GRM40Y5V334Z16PT
C452	J0893197R	CKM-223K250B-CNT1608

A529270 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
C454	J0893027R	CKM-104K250B-CNT2125	C614	C150711	CAP 100N 36521104 100V POL
C457	J0796491R	RMC73M-000R	C616	J0800339F	CAP ELECT 220UF 63V
C461	J0893123R	CC73MCH1H560JR	C617	J0227009R	CK73B1H102KR 1N 1206
C462	J0893213R	CC73MCH1H222JR	C620	J0893027R	CKM-104K250B-CNT2125
C463	J0893179R	CKM-104K160B-CNT1608	C621	J0893208R	CKM-102K500B-CNT1608
C465	J0800294R	ELECT CAP 10UF 50V SMG	C624	C140711	10N 10% POLY CAPACITOR
C466	J0800353R	CAP ELECTRO 470UF 16V	C639	J0800292R	CAP ELECT 10UF 25V SMG
C467	J0800294R	ELECT CAP 10UF 50V SMG	C644	J0890092R	CAP CERAMIC 0.0022uF 50V
C468	J0893031R	CKM 102K500B CNT2125	C701	J0243507R	CK45B2H331KB
C469	J0893179R	CKM-104K160B-CNT1608	C702	J0257540F	ELEC CAP 4U7 250V
C470	J0893179R	CKM-104K160B-CNT1608	C703	C142760	12N 1.6KV R/EVOX PHE428
C471	J0800327R	ELECT CAP 100UF 25V SMG	C705	J0299994F	POLY CAP .022UF 5% 630V
C500	J0893039R	CKM 472K500B CNT 2125	C706	J0890087R	CAP CERAMIC 1000pf-B 50V
C501	J0800279R	ELECT CAP 1.UF 50V	C707	JAJ00141F	CC-332K202R-D 10P 3N3 2KV
C502	J0195250R	RMC73S 000R	C708	J0244505R	CER CAP 2n2-K 500V
C503	J0893044R	CKM 103K500B CNT2125	C709	J0253953R	CE04W2C2R2M
C504	J0800279R	ELECT CAP 1.UF 50V	C710	J0253953R	CE04W2C2R2M
C506	J0890087R	CAP CERAMIC 1000pf-B 50V	C711	C353764	&330N MKP379 44334
C508	J0893222R	CKM-103K500B-CNT1608	C712	C457764	&470N MKP379 44474
C509	J0893222R	CKM-103K500B-CNT1608	C713	C353764	&330N MKP379 44334
C510	J0227436R	0.22U +/-10% 1206 SMT	C714	C257764	& 270N 250V MKP379
C511	J0893206R	680PF +/-10% 0603 SMT	C715	J0243512R	CK45B2H821KB
C518	J0893048R	CKM-223K500B-CNT2125	C716	C140707	CAP 10N 365-51103 MULARD
C518U	C842711	CAP 82N 365 100V POLY	C719	J0257540F	ELEC CAP 4U7 250V
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V	C720	J0880033R	CQM-152K500HFT
C572	J0228066R	GRM40CDG331J50PT	C724	JAJ00121R	CK45-R3DD101K 100PF 2KV
C575	J0893027R	CKM-104K250B-CNT2125	C726	J0800336R	CAP ELEC 220UF M SMG 25V
C576	J0893048R	CKM-223K500B-CNT2125	C727	J0243507R	CK45B2H331KB
C577	J0893027R	CKM-104K250B-CNT2125	C732	J0800291R	CAP ELEC 10uF 16V SMG
C578	J0893027R	CKM-104K250B-CNT2125	C735U	J0880044R	CAP POLYESTER 0.01UF K50V
C579	J0893027R	CKM-104K250B-CNT2125	C737	C160708	1UF +-10% 250V 368-45105
C581	J0880016R	POLY CAP FLM 0.1UF 50V	C742	J0800337R	CEL-221M350WMFT
C582	J0893027R	CKM-104K250B-CNT2125	C743	J0880053R	CQ93M1H473KEB(MF) N/PAN
C583	J0195250R	RMC73S 000R	C747	J0250511R	CAP POLY 0.022UF PHILIPS
C585	J0800372F	CEL 332 M160WNL SMG 5MM	C748	JAJ00134R	CK45-R3DD102K 1N 2KV
C586	J0893027R	CKM-104K250B-CNT2125	C749	J0880194R	0.1UF 50V +-5% (100N)
C588	J0893027R	CKM-104K250B-CNT2125	C752	JAJ00129R	CK45-R3DD 471K
C589	J0893039R	CKM 472K500B CNT 2125	C764	J0800279R	ELECT CAP 1.UF 50V
C590	J0195250R	RMC73S 000R	C769	JAJ00134R	CK45-R3DD102K 1N 2KV
C591	J0195250R	RMC73S 000R	C770	J0800292R	CAP ELECT 10UF 25V SMG
C592	J0195250R	RMC73S 000R	C900	C150763	&100NF 20% X2 275V BEABT
C593	J0800279R	ELECT CAP 1.UF 50V	C901	J0262774N	0.22UF 250VAC X2 ~BEABT
C594	J0228038R	CC73SCH1H220JR	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
C595	J0228038R	CC73SCH1H220JR	C903	J0890083R	CK45 B1H471KB
C596	J0893027R	CKM-104K250B-CNT2125	C904	C648763	&68NF 20% X2 275V BEABT
C597	J0800372F	CEL 332 M160WNL SMG 5MM	C905	C001561	ELECT CAP 100UF 250V
C598	C457884	&GRM40X7R474K25PT 470N	C908	J0800329R	ELECT CAP 100UF 50V SMG
C599	J0893035R	CKM--222K500B CNT2125	C909	J0800352R	ELEC CAP 470UF 10V SMG
C602	J0800337R	CEL-221M350WMFT	C910	J0880044R	CAP POLYESTER 0.01UF K50V
C603	J0800329R	ELECT CAP 100UF 50V SMG	C911	J0800328R	CEL-101M350WMFT
C604	J0880044R	CAP POLYESTER 0.01UF K50V	C912	J0244505R	CER CAP 2n2-K 500V
C605	C150711	CAP 100N 36521104 100V POL	C913	J0800327R	ELECT CAP 100UF 25V SMG
C606	J0893027R	CKM-104K250B-CNT2125	C914	C005046	ELECT 1000UF 25V LXY
C607	J0893027R	CKM-104K250B-CNT2125	C915	J0800354R	470UF 25V SMG
C610	J0890092R	CAP CERAMIC 0.0022uF 50V	C916	C005046	ELECT 1000UF 25V LXY

A529270 PARTS LIST

I.D.	Part No.	Description
C917	J0880048R	CQT223K50MB (PANASONIC)
C918	C001561	ELECT CAP 100UF 250V
C919	J0890078R	CK45B1H221KB (MURATA)
C920	C001561	ELECT CAP 100UF 250V
C921	C001561	ELECT CAP 100UF 250V
C922	J0880037R	CQM332K500HFT
C923	J0880037R	CQM332K500HFT
C924	J0800294R	ELECT CAP 10UF 50V SMG
C925	JAJ00121R	CK45-R3DD101K 100PF 2KV
C926	JAJ00127R	CK45-R3DD 331K
C927	JAJ00121R	CK45-R3DD101K 100PF 2KV
C929	J0800327R	ELECT CAP 100UF 25V SMG
C931	JAJ00138F	CC-222K202R-DF 2N2 2KV
C932	J0880037R	CQM332K500HFT
C933	J0253491F	ELEC CAP 100UF 200V
C936	J0880051R	CQ93M1H333KEB PANASONIC
C942	J0880042R	CQ93M1H682KEB(MF) N/PAN
C950	J0259431F	ELEC CAP 220UF 200V
C951	J0800362F	CAP ELECT 1000UF 25V SMG
C952	J0800362F	CAP ELECT 1000UF 25V SMG
C953	J0243509R	CERAMIC CAP 470p 500V
C954	J0243509R	CERAMIC CAP 470p 500V
C955	JAJ00129R	CK45-R3DD 471K
C957	J0243509R	CERAMIC CAP 470p 500V
C959	J0800353R	CAP ELECTRO 470UF 16V
C960	J0244501R	CER CAP 1000PF-K 500V
C961	J0244501R	CER CAP 1000PF-K 500V
C962	J0244501R	CER CAP 1000PF-K 500V
C963	J0244501R	CER CAP 1000PF-K 500V
C964	J0243511R	CER CAP 680PF-K 500V
C967	J0243509R	CERAMIC CAP 470p 500V
C970	J0800345R	ELECT CAP 330UF 25V SMG
C971	J0880044R	CAP POLYESTER 0.01UF K50V
C977	J0243509R	CERAMIC CAP 470p 500V
C986	J0800328R	CEL-101M350WMFT
C987	J0800352R	ELEC CAP 470UF 10V SMG
C990	J0880048R	CQT223K50MB (PANASONIC)
C991	E884110	SPARK GAP 10N 2KV SDUK 16
C992	J0880044R	CAP POLYESTER 0.01UF K50V
C993	C150891	100N 500V CAP
C994	J0800327R	ELECT CAP 100UF 25V SMG
C995	J0880037R	CQM332K500HFT
C997	J0880031R	CQ93M1H102KEB (MF) N/PAN
C999	C232753	2N2 4KVAC PME294 UL BEABT
CA01U	J0880198R	POLY CAP 0.22UF-J 50V
CA02U	J0880198R	POLY CAP 0.22UF-J 50V
CA03	J0880198R	POLY CAP 0.22UF-J 50V
CA04	J0893031R	CKM 102K500B CNT2125
CA05	J0893031R	CKM 102K500B CNT2125
CA06	J0893118R	CCM-270J500CHCNT1608
CA07	C001550	4700UF 25V SMG S/LEG
CA08	J0893135R	CC73MCH1H471JR 1608
CA09	J0893179R	CKM-104K160B-CNT1608
CA10	J0893133R	CC73MCH1H331JR
CA11	J0893135R	CC73MCH1H471JR 1608

I.D.	Part No.	Description
CA12	J0893135R	CC73MCH1H471JR 1608
CA13	J0284623R	CEL-1R0M500WMFT(BP)E
CA14	C001550	4700UF 25V SMG S/LEG
CA15	C343882	GRM40X7R333K50-550
CA16	J0880198R	POLY CAP 0.22UF-J 50V
CA17	J0893208R	CKM-102K500B-CNT1608
CA18	J0893208R	CKM-102K500B-CNT1608
CA20	J0893027R	CKM-104K250B-CNT2125
CA21	J0228070R	MINI CHIP 470PF-J CH 50V
CA22	J0893133R	CC73MCH1H331JR
CA24	J0893027R	CKM-104K250B-CNT2125
CA25	J0880064R	CQM - 334J500HFT
CA27	J0893031R	CKM 102K500B CNT2125
CA28	J0284623R	CEL-1R0M500WMFT(BP)E
CA29	C343882	GRM40X7R333K50-550
CA30	J0893208R	CKM-102K500B-CNT1608
CA31	J0800291R	CAP ELEC 10uF 16V SMG
CA32	J0893179R	CKM-104K160B-CNT1608
CA33	J0893179R	CKM-104K160B-CNT1608
CA34	J0893222R	CKM-103K500B-CNT1608
CA35	J0800316R	47u 10V ELECT CAP SMG
CA36	J0800316R	47u 10V ELECT CAP SMG
CA37	J0800325R	CEL-101M100WMFT
CA38	J0800325R	CEL-101M100WMFT
CA39	J0893219R	CCM-682K500B-CNT1608
CA40	J0893042R	CKM 682K500B CNT2125
CA41	J0800325R	CEL-101M100WMFT
CA42	J0284623R	CEL-1R0M500WMFT(BP)E
CA44	J0284623R	CEL-1R0M500WMFT(BP)E
COVER	N332053	COVER
CS10B	JAA00381R	10UF 6.3V SMT 3216
CS11	J0228054R	CC73SCH1H101JR
CS12	J0893126R	CCM-101J500CHCNT1608
CS20	J0800326R	CEL-101M160WMFT
CS23B	JAA00381R	10UF 6.3V SMT 3216
CS24	J0893126R	CCM-101J500CHCNT1608
CS25	J0893126R	CCM-101J500CHCNT1608
CS31	J0893126R	CCM-101J500CHCNT1608
CS32	J0893126R	CCM-101J500CHCNT1608
CS33B	JAA00381R	10UF 6.3V SMT 3216
CS40B	JAA00381R	10UF 6.3V SMT 3216
CS44	J0893126R	CCM-101J500CHCNT1608
CS45	J0893126R	CCM-101J500CHCNT1608
CS51	J0893126R	CCM-101J500CHCNT1608
CS52	J0228054R	CC73SCH1H101JR
CS53B	JAA00381R	10UF 6.3V SMT 3216
CS60B	JAA00381R	10UF 6.3V SMT 3216
CS62	J0893126R	CCM-101J500CHCNT1608
CS63	J0893126R	CCM-101J500CHCNT1608
CS91	J0796491R	RMC73M-000R
CU01	J0800359R	CEL-102M100WMFT
D001	T531069	SHOTTKY 30V/200mA/BAT254
D002	T531067	DIODE BAS216 S/MOUNT
D003	T531067	DIODE BAS216 S/MOUNT
D004	T531069	SHOTTKY 30V/200mA/BAT254

A529270 PARTS LIST

I.D.	Part No.	Description
D006	T531069	SHOTTKY 30V/200mA/BAT254
D007	T531069	SHOTTKY 30V/200mA/BAT254
D008	T531069	SHOTTKY 30V/200mA/BAT254
D009	T531069	SHOTTKY 30V/200mA/BAT254
D011	J2343963M	MPG06J (TAPE) GI
D015	T531067	DIODE BAS216 S/MOUNT
D016	T531069	SHOTTKY 30V/200mA/BAT254
D017	T531069	SHOTTKY 30V/200mA/BAT254
D018	T531069	SHOTTKY 30V/200mA/BAT254
D206	T531067	DIODE BAS216 S/MOUNT
D208	T531067	DIODE BAS216 S/MOUNT
D209	T531067	DIODE BAS216 S/MOUNT
D301	T531068	DIODE MA723/TP PANASONIC
D501	T531067	DIODE BAS216 S/MOUNT
D502	T531056	DIODE BYV10-40 ~MULLARD
D503	T531056	DIODE BYV10-40 ~MULLARD
D507	T531067	DIODE BAS216 S/MOUNT
D508	J2348921M	DIODE 1N4531
D522	T531068	DIODE MA723/TP PANASONIC
D523	T531069	SHOTTKY 30V/200mA/BAT254
D601	J2348921M	DIODE 1N4531
D603	T531067	DIODE BAS216 S/MOUNT
D604	T431113	DIODE BYD33J MULL BEAB
D610	T431113	DIODE BYD33J MULL BEAB
D611	T431113	DIODE BYD33J MULL BEAB
D622	J2343962M	MPG06G
D645	T536259	BZX79C56V
D701	T431113	DIODE BYD33J MULL BEAB
D702	T431113	DIODE BYD33J MULL BEAB
D703	J2343941M	RGP10G
D706	T431117F	DIODE BY228 P/F PHILIPS
D707	T531086F	BYW96E
D708	J2336612	RU3AM
D711	T531086F	BYW96E
D713	T431113	DIODE BYD33J MULL BEAB
D714	T431113	DIODE BYD33J MULL BEAB
D715	J2348921M	DIODE 1N4531
D716	J2348921M	DIODE 1N4531
D735	T431113	DIODE BYD33J MULL BEAB
D739	J2348921M	DIODE 1N4531
D745	J2348921M	DIODE 1N4531
D904	J2348921M	DIODE 1N4531
D905	T431113	DIODE BYD33J MULL BEAB
D906	T431113	DIODE BYD33J MULL BEAB
D907	T531055	DIODE BAT85 SCHOTTKY MULL
D910	J2348921M	DIODE 1N4531
D911	J2348921M	DIODE 1N4531
D913	J2348921M	DIODE 1N4531
D914	J2348921M	DIODE 1N4531
D915	T431113	DIODE BYD33J MULL BEAB
D916	T431113	DIODE BYD33J MULL BEAB
D919	T531086F	BYW96E
D920	J2342711M	DIODE EM2A (SANKEN)
D921	J2342711M	DIODE EM2A (SANKEN)
D922	J2342711M	DIODE EM2A (SANKEN)
D923	J2342711M	DIODE EM2A (SANKEN)
D924	J2342711M	DIODE EM2A (SANKEN)
D925	T431122	DIODE BYV28-200~PHILIPS~
D927	J2348921M	DIODE 1N4531
D931	J2342711M	DIODE EM2A (SANKEN)
D933	T536259	BZX79C56V
D934	T431114	& BYD33M
D939	T431113	DIODE BYD33J MULL BEAB
D953	T431145	BYW29E-200
D953A	H224075	H/SINK F9-4-220 &TAG COL
D955	T431127	BYR29F-700
D955A	H235369	FI2-32-2LA-2 HEATSINK
D955B	G291023	M2.5x8 TAPTITE SCREW
D955C	G560333	M2.5 SPRING WASHER
D960	J2342711M	DIODE EM2A (SANKEN)
D961	J2342711M	DIODE EM2A (SANKEN)
D962	J2342711M	DIODE EM2A (SANKEN)
D963	J2342711M	DIODE EM2A (SANKEN)
D970	T431113	DIODE BYD33J MULL BEAB
D977	T431122	DIODE BYV28-200~PHILIPS~
D982	J2348921M	DIODE 1N4531
D984	T531053	DIODE IN4148 MULL/PHIL/ITT
D991	T431113	DIODE BYD33J MULL BEAB
D992	T431120	DIODE BYV27-150 ~MULLARD~
D994	T531055	DIODE BAT85 SCHOTTKY MULL
D995	T531053	DIODE IN4148 MULL/PHIL/ITT
D996	J2348921M	DIODE 1N4531
D997U	J2348921M	DIODE 1N4531
DA01	T531067	DIODE BAS216 S/MOUNT
DA02	J2348921M	DIODE 1N4531
DA03	T531067	DIODE BAS216 S/MOUNT
DS14	T531067	DIODE BAS216 S/MOUNT
DS25	T531067	DIODE BAS216 S/MOUNT
DS31	T531067	DIODE BAS216 S/MOUNT
DS42	T531067	DIODE BAS216 S/MOUNT
DS51	T531067	DIODE BAS216 S/MOUNT
DS60	T531067	DIODE BAS216 S/MOUNT
E002	E843366	OSD SHIELDED LEAD
E006	E843377	LEAD ASSY 7 WAY 320MM
E04	E843375	SPEAKER LEAD
E10	E846825	A5 SCREEN LD 2PIN EHUK
E20	E843353	2 WAY SHIELDED LEAD 330MM
E206	E843314	CPT EARTH LEAD
E207	E843314	CPT EARTH LEAD
E208	E843286	GROUND LEAD FEMALE
E30	E846825	A5 SCREEN LD 2PIN EHUK
E500	E843376	OSD SHIELDED LEAD
E601	J2661752	3P PLUG PIN/BASE UL BEAB
E802	E843351	A20 8 WAY CRT BASE LEAD
E803	E846902	A7 CRT BASE LEAD 550mm
F900	J2722446	FUS-4A T4AH 250V BEABT
F900A	J2721792	FUSE HOLDER UL/BEAB
F901	E882359	FUSE GLASS T2.0AL BEABT
F901A	J2721792	FUSE HOLDER UL/BEAB
HS01	E826160	H/P SKT HSJ3000-01-010

A529270 PARTS LIST

I.D.	Part No.	Description
I001	T900956	LE33CZ TO92
I003	E730301	IC M15_IF2
I003A	E823935	52WAY IC SKT ~ FELCO
I004	T900779	74HC595
I006	T900989	M24C16-W SMT
I007	T900980	M62703ML
I302	T900762	IC 4053 SO16N
I303	T900762	IC 4053 SO16N
I304	T900762	IC 4053 SO16N
I401A	E823933	*64 PIN SKT 1179976441005
I402	T900902	OP AMPS NJM3403 SMT
I403	T900960	NJM3404
I501	T900959	TDA8879
I601	T900951	TDA8358J
I601A	H235475	HEATSINK A20
I601B	G884020	SPRING CLIP 56379-MULLARD
I900	T900452	UC3844 SGS/UNITRODE
I902	T900815	& UC3843N SGS
I903	T901000	L78M05CV 500MA REGULATOR
I903A	H224085	F9-4-220D-2LS
I904	T900345	REG 7805 SGS/MOTO/NEC
I904A	G884023	SPRING CLIP
I905	T900963	IC VIPER 20
I905A	H224085	F9-4-220D-2LS
I943	T900796	&TL431CZ-AP SGS
I964	T548013	CNY17F1/6 SIEMENS BEABT
I997	T548016	PC817B OPTO BEAB
I998	T548016	PC817B OPTO BEAB
I999	T548013	CNY17F1/6 SIEMENS BEABT
IA01	T900955	TDA7490L
IA04	T900978	TDA2822D SO8
IR01	T549018	& IR REC TSOP2838UH1 TEMIC
K118	J0796491R	RMC73M-000R
K12	J0195250R	RMC73S 000R
K120	J0195248R	RMC73--000R
K121	J0195248R	RMC73--000R
K126	J0796491R	RMC73M-000R
K129	J0195250R	RMC73S 000R
K132	J0195248R	RMC73--000R
K133	J0796491R	RMC73M-000R
K135	J0195248R	RMC73--000R
K136	J0195248R	RMC73--000R
K137	J0796491R	RMC73M-000R
K139	J0195248R	RMC73--000R
K141	J0195250R	RMC73S 000R
K142	J0195250R	RMC73S 000R
K146	J0195248R	RMC73--000R
K152	J0195250R	RMC73S 000R
K157	J0195248R	RMC73--000R
K16	J0195250R	RMC73S 000R
K161	J0195248R	RMC73--000R
K165	J0195248R	RMC73--000R
K166	J0796491R	RMC73M-000R
K167	J0195250R	RMC73S 000R
K168	J0195250R	RMC73S 000R
K170	J0796491R	RMC73M-000R
K171	J0195248R	RMC73--000R
K175	J0195250R	RMC73S 000R
K176	J0195250R	RMC73S 000R
K182	J0796491R	RMC73M-000R
K183	J0796491R	RMC73M-000R
K189	J0796491R	RMC73M-000R
K192	J0796491R	RMC73M-000R
K197	J0195248R	RMC73--000R
K198	J0195248R	RMC73--000R
K199	J0195250R	RMC73S 000R
K20	J0195250R	RMC73S 000R
K200	J0195248R	RMC73--000R
K202	J0195250R	RMC73S 000R
K203	J0195248R	RMC73--000R
K206	J0796491R	RMC73M-000R
K216	J0796491R	RMC73M-000R
K220	J0796491R	RMC73M-000R
K225	J0195248R	RMC73--000R
K231	J0195248R	RMC73--000R
K233	J0195250R	RMC73S 000R
K236	J0195250R	RMC73S 000R
K237	J0195250R	RMC73S 000R
K240	J0195250R	RMC73S 000R
K241	J0195250R	RMC73S 000R
K242	J0195250R	RMC73S 000R
K243	J0195250R	RMC73S 000R
K25	J0195248R	RMC73--000R
K262	J0195250R	RMC73S 000R
K266	J0195250R	RMC73S 000R
K267	J0796491R	RMC73M-000R
K271	J0796491R	RMC73M-000R
K288	J0195248R	RMC73--000R
K289	J0796491R	RMC73M-000R
K293	J0195248R	RMC73--000R
K299	J0796491R	RMC73M-000R
K300	J0195250R	RMC73S 000R
K303	J0195250R	RMC73S 000R
K310	J0195250R	RMC73S 000R
K333	J0796491R	RMC73M-000R
K341	J0195248R	RMC73--000R
K343	J0195248R	RMC73--000R
K345	J0796491R	RMC73M-000R
K346	J0796491R	RMC73M-000R
K350	J0195248R	RMC73--000R
K39	J0195250R	RMC73S 000R
K405	J0796491R	RMC73M-000R
K504	J0195250R	RMC73S 000R
K510	J0796491R	RMC73M-000R
K512	J0195248R	RMC73--000R
K513	J0796491R	RMC73M-000R
K64	J0195250R	RMC73S 000R
K66	J0195248R	RMC73--000R
K67	J0195248R	RMC73--000R
K68	J0796491R	RMC73M-000R

A529270 PARTS LIST

I.D.	Part No.	Description
K84	J0195248R	RMC73--000R
K85	J0195250R	RMC73S 000R
K86	J0195250R	RMC73S 000R
K87	A306099	BRACKET ASSEMBLY
K88	J0195248R	RMC73--000R
KVR900	W024001	0.56ML SFT TIN'D COP WIRE
L001	J2122943M	AXIAL COIL 10UH-J
L002	J2122943M	AXIAL COIL 10UH-J
L003	J2122943M	AXIAL COIL 10UH-J
L200	J0195250R	RMC73S 000R
L201	J0195250R	RMC73S 000R
L202	J0195250R	RMC73S 000R
L203	J0195250R	RMC73S 000R
L204	J0195250R	RMC73S 000R
L205	J0195250R	RMC73S 000R
L208	J0195250R	RMC73S 000R
L210	J0195250R	RMC73S 000R
L256	J2123781R	FILTER COIL EL101K
L309	L420187	BLM11A102S
L310	L420187	BLM11A102S
L311	J0796491R	RMC73M-000R
L312	J0195250R	RMC73S 000R
L313	J0796491R	RMC73M-000R
L314	J0796491R	RMC73M-000R
L315	J0796491R	RMC73M-000R
L317	J0796491R	RMC73M-000R
L318	J0796491R	RMC73M-000R
L330	J2122956M	COIL LAL 100UH K
L331	J0796491R	RMC73M-000R
L333	L420187	BLM11A102S
L334	L420187	BLM11A102S
L335	J0195250R	RMC73S 000R
L336	J0796491R	RMC73M-000R
L337	J0796491R	RMC73M-000R
L338	J0796491R	RMC73M-000R
L340	J0796491R	RMC73M-000R
L341	J0796491R	RMC73M-000R
L348	J0796491R	RMC73M-000R
L349	J2123781R	FILTER COIL EL101K
L350	J2123781R	FILTER COIL EL101K
L351	J2123781R	FILTER COIL EL101K
L358	J0796491R	RMC73M-000R
L400	J2123781R	FILTER COIL EL101K
L419	L420187	BLM11A102S
L420	J2122943M	AXIAL COIL 10UH-J
L422	L420187	BLM11A102S
L423	J2122943M	AXIAL COIL 10UH-J
L443	L420187	BLM11A102S
L444	J2122943M	AXIAL COIL 10UH-J
L446	L420187	BLM11A102S
L447	J2122943M	AXIAL COIL 10UH-J
L451	J2122253M	AXIAL COIL 100uH K TAPE
L452	J2122253M	AXIAL COIL 100uH K TAPE
L453	J2122253M	AXIAL COIL 100uH K TAPE
L540	J2123781R	FILTER COIL EL101K
L553	J2123781R	FILTER COIL EL101K
L601	J2123462M	FERRITE BEADS TYPE B2.3UH
L602	L300002	RL8010-100J-UL-HUK-B06
L604	L300002	RL8010-100J-UL-HUK-B06
L700	JBH00039	HC-820KS1 (LHL10)
L701	J2123461M	FERRITE BEAD 0.8uH
L702	L380150	? LINEARITY COIL ISKRA
L704	J2123461M	FERRITE BEAD 0.8uH
L705	J2123462M	FERRITE BEADS TYPE B2.3UH
L751	L380117	BRIDGE COIL 5MH
L752	L380147	&BRIDGE COIL
L900	L210068	M/FILTER 97192 RIFA BEAB
L901	L210068	M/FILTER 97192 RIFA BEAB
L902	J2123462M	FERRITE BEADS TYPE B2.3UH
L903	J2123462M	FERRITE BEADS TYPE B2.3UH
L904	J2125579	CHOKE COIL 47UH
L905	J2123462M	FERRITE BEADS TYPE B2.3UH
L909	J2123462M	FERRITE BEADS TYPE B2.3UH
L911	L300005	RL8010-180J-UL-HUK-B06
L921	J2123462M	FERRITE BEADS TYPE B2.3UH
L931	J2123462M	FERRITE BEADS TYPE B2.3UH
L932	J2123462M	FERRITE BEADS TYPE B2.3UH
L935	J2123462M	FERRITE BEADS TYPE B2.3UH
L939	J2123462M	FERRITE BEADS TYPE B2.3UH
L955	J2123462M	FERRITE BEADS TYPE B2.3UH
L957	J2123462M	FERRITE BEADS TYPE B2.3UH
L961	L380184	BUCK COIL E20/10/5
L965	J2123462M	FERRITE BEADS TYPE B2.3UH
L992	J2123462M	FERRITE BEADS TYPE B2.3UH
LA01	JBH00034	HC-330K SI LH10TK
LA02	L380176	33UH PANASONIC ELC12E330
LA03	JBH00034	HC-330K SI LH10TK
LA04	L380176	33UH PANASONIC ELC12E330
LED2	T547049	SLR-325VC LED RED
LS04	J2123103M	LAL 02 AXIAL COIL 10uH
LS201	J2122956M	COIL LAL 100UH K
LS25	J2123103M	LAL 02 AXIAL COIL 10uH
LS31	J2123103M	LAL 02 AXIAL COIL 10uH
LS42	J2123103M	LAL 02 AXIAL COIL 10uH
LS50	J2123103M	LAL 02 AXIAL COIL 10uH
LS60	J2123103M	LAL 02 AXIAL COIL 10uH
P001	J2902261	PLG-02P2R5VPWB
P10	J2902261	PLG-02P2R5VPWB
P302	J2902261	PLG-02P2R5VPWB
P303	J2902261	PLG-02P2R5VPWB
P400	J2902261	PLG-02P2R5VPWB
P701	J2661753	4 PIN PLUG WITH BASE
P802	J2902267	PLG-08P2R5V PWB
P803	J2902264	PLG-05P 2R5V PWB
P9	J2902261	PLG-02P2R5VPWB
P900	E825259	2 WAY MAIN HEADER UL BEAB
P902	J2661751	2P PIN PLUG & BASE
PA04	J2902263	PLG-04P2R5VPWB
PHONO1	E826943	QUAD PHONO SKT
PHONO2	E826944	QUAD PHONO SKT

A529270 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
PS01	J2902261	PLG-02P2R5VPWB	QA01	J2325691R	TRS 2SC2412K T146Q/R
Q002	T633153	2N7002 MOSFET	QS11	J2325691R	TRS 2SC2412K T146Q/R
Q003	J2325691R	TRS 2SC2412K T146Q/R	QS17	J2325781R	TRS 2SA1037K T146Q/R
Q004	J2325691R	TRS 2SC2412K T146Q/R	QS20	J2325691R	TRS 2SC2412K T146Q/R
Q005	T633153	2N7002 MOSFET	QS29	J2325781R	TRS 2SA1037K T146Q/R
Q006	J2325691R	TRS 2SC2412K T146Q/R	QS31	J2325781R	TRS 2SA1037K T146Q/R
Q007	J2325691R	TRS 2SC2412K T146Q/R	QS32	J2325691R	TRS 2SC2412K T146Q/R
Q008	J2325691R	TRS 2SC2412K T146Q/R	QS40	J2325691R	TRS 2SC2412K T146Q/R
Q011	J2325691R	TRS 2SC2412K T146Q/R	QS44	J2325781R	TRS 2SA1037K T146Q/R
Q200	J2325691R	TRS 2SC2412K T146Q/R	QS51	J2325781R	TRS 2SA1037K T146Q/R
Q212	T631302	& DTC114YKAT146	QS52	J2325691R	TRS 2SC2412K T146Q/R
Q213	T631302	& DTC114YKAT146	QS60	J2325691R	TRS 2SC2412K T146Q/R
Q214	T631302	& DTC114YKAT146	QS61	J2325781R	TRS 2SA1037K T146Q/R
Q215	T631302	& DTC114YKAT146	R001	J0196093R	RMC73M-1F103JR
Q216	J2328161R	TRS 2SC4265JC02TR	R002	J0196043R	RMC73M-1F101JR
Q217	J2325691R	TRS 2SC2412K T146Q/R	R004	J0196093R	RMC73M-1F103JR
Q330	J2325781R	TRS 2SA1037K T146Q/R	R005	J0196043R	RMC73M-1F101JR
Q332A	J2325781R	TRS 2SA1037K T146Q/R	R006	J0195883R	RMC73S 2A221JR
Q400	J2325691R	TRS 2SC2412K T146Q/R	R007	J0195001R	RMC73 2B101JR
Q401	J2325691R	TRS 2SC2412K T146Q/R	R008	J0196093R	RMC73M-1F103JR
Q402	J2325691R	TRS 2SC2412K T146Q/R	R009	J0196093R	RMC73M-1F103JR
Q403	J2325691R	TRS 2SC2412K T146Q/R	R010	J0196093R	RMC73M-1F103JR
Q412	J2325781R	TRS 2SA1037K T146Q/R	R011	J0196093R	RMC73M-1F103JR
Q413	J2316691R	STC-DTC144EK T146	R012	J0196093R	RMC73M-1F103JR
Q501	J2325781R	TRS 2SA1037K T146Q/R	R013	J0196043R	RMC73M-1F101JR
Q505	J2325781R	TRS 2SA1037K T146Q/R	R014	J0196043R	RMC73M-1F101JR
Q507	J2325691R	TRS 2SC2412K T146Q/R	R015	J0196043R	RMC73M-1F101JR
Q508	J2325691R	TRS 2SC2412K T146Q/R	R016	J0196043R	RMC73M-1F101JR
Q509	J2325781R	TRS 2SA1037K T146Q/R	R017	J0196093R	RMC73M-1F103JR
Q605	J2325691R	TRS 2SC2412K T146Q/R	R018	J0196093R	RMC73M-1F103JR
Q606	J2325781R	TRS 2SA1037K T146Q/R	R019	J0196086R	RMC73M-1F562JR
Q631	T636077	&IRFS530A ISOL SAMSUNG	R020	J0196093R	RMC73M-1F103JR
Q631A	G884023	SPRING CLIP	R021	J0196068R	RMC73M-1F102JR
Q701	T633137	TRANS BF459 MULLARD/SES	R022	J0196068R	RMC73M-1F102JR
Q702	T732016	P0109DA THYRISTOR SGS	R023	J0196068R	RMC73M-1F102JR
Q711	J2325781R	TRS 2SA1037K T146Q/R	R024	J0195927R	RMC73S 2A123JR
Q751	J2315451	TRS-BU2508AF	R025	J0196095R	RMC73M - 1F123JR
Q751A	G884020	SPRING CLIP 56379-MULLARD	R026	J0195032R	RMC73--2B393JR 1%
Q777	J2315891R	TRS JC548B	R027	J0196095R	RMC73M - 1F123JR
Q903	T636072	BUT12AF NON SELECTED	R028	J0195927R	RMC73S 2A123JR
Q903A	H235417	POWER HEATSINK(COPPER)	R029	J0195933R	RMC73S 2A223JR
Q903B	G884020	SPRING CLIP 56379-MULLARD	R030	J0195939R	RMC73S2A393JR
Q904	T636077	&IRFS530A ISOL SAMSUNG	R031	J0195933R	RMC73S 2A223JR
Q911	T636077	&IRFS530A ISOL SAMSUNG	R032	J0700054M	10K 1/16W C/FILM 5%
Q912	T631309	TRANS BC557B BANDED	R033	J0196093R	RMC73M-1F103JR
Q913	T633133	TRANS BF422 BAND MULL/AEG	R036	J0700054M	10K 1/16W C/FILM 5%
Q919	J2315921R	TRS JC558B	R037	J0195025R	RMC73 - 2B103JR
Q922	J2315891R	TRS JC548B	R038	J0196093R	RMC73M-1F103JR
Q923	T900796	&TL431CZ-AP SGS	R039	J0700049M	4K7 1/16W C/FILM 5%
Q927	T636094	MOSFET IRF640	R040	J0700041M	1K 1/16W C/FILM 5%
Q927A	H224085	F9-4-220D-2LS	R041	J0700041M	1K 1/16W C/FILM 5%
Q929	W024001	0.56ML SFT TIN'D COP WIRE	R042	J0195875R	RMC73S 2A101JR
Q932	T633133	TRANS BF422 BAND MULL/AEG	R043	J0700027M	100R 1/16W C/FILM 5%
Q951	J2315891R	TRS JC548B	R044	J0700027M	100R 1/16W C/FILM 5%
Q964	T900473	SHUNT REG TL431CLP MOT/TEX	R045	J0196043R	RMC73M-1F101JR

A529270 PARTS LIST

I.D.	Part No.	Description
R046	J0700027M	100R 1/16W C/FILM 5%
R047	J0196051R	RMC73M-1F221JR
R048U	J0700027M	100R 1/16W C/FILM 5%
R052	J0195875R	RMC73S 2A101JR
R053	J0196043R	RMC73M-1F101JR
R054	J0195013R	RMC73 2B102JR
R055	J0195013R	RMC73 2B102JR
R056	J0195013R	RMC73 2B102JR
R057	J0196093R	RMC73M-1F103JR
R058	J0196093R	RMC73M-1F103JR
R059	J0196093R	RMC73M-1F103JR
R060	J0196093R	RMC73M-1F103JR
R061	J0196093R	RMC73M-1F103JR
R062	J0196093R	RMC73M-1F103JR
R063	J0196043R	RMC73M-1F101JR
R064	J0196093R	RMC73M-1F103JR
R065	J0196043R	RMC73M-1F101JR
R066	J0195894R	RMC73S2A621JR 620R
R067	J0196093R	RMC73M-1F103JR
R070	J0196093R	RMC73M-1F103JR
R071	J0196093R	RMC73M-1F103JR
R074	J0195925R	RMC73S 2A103JR
R075	J0195941R	RMC73S 2A473JR
R078	J0196093R	RMC73M-1F103JR
R079	J0196043R	RMC73M-1F101JR
R080	J0196043R	RMC73M-1F101JR
R081	J0196053R	RMC73M - 1F271JR
R082	J0196093R	RMC73M-1F103JR
R083	J0196043R	RMC73M-1F101JR
R084	J0196043R	RMC73M-1F101JR
R085	J0195875R	RMC73S 2A101JR
R090	J0700027M	100R 1/16W C/FILM 5%
R091	J0196043R	RMC73M-1F101JR
R092	J0196078R	RMC73M-1F272JR
R093	J0196043R	RMC73M-1F101JR
R094	J0196043R	RMC73M-1F101JR
R095	J0196043R	RMC73M-1F101JR
R096	J0196043R	RMC73M-1F101JR
R097	J0700027M	100R 1/16W C/FILM 5%
R098	R120330	100R 1/4W DRG NO
R099	J0196043R	RMC73M-1F101JR
R230	J0195918R	RMC73S 2A562JR
R257	J0700027M	100R 1/16W C/FILM 5%
R258	J0700027M	100R 1/16W C/FILM 5%
R259	J0195900R	RMC73S 2A102JR
R261	J0195250R	RMC73S 000R
R263	J0195885R	RMC73S 2A271JR
R264	J0195918R	RMC73S 2A562JR
R265	J0700038M	680R 1/16W C/FILM 5%
R266	J0196078R	RMC73M-1F272JR
R267	J0195018R	RMC73 2B272JR
R268	J0195910R	RMC73S-2A272JR
R269	J0195250R	RMC73S 000R
R270	J0195250R	RMC73S 000R
R271	J0195875R	RMC73S 2A101JR
R272	J0195920R	RMC73S 2A682JR
R273	J0196070R	RMC73M - 1F122JR
R274	J0196043R	RMC73M-1F101JR
R275	J0195893R	RMC73S 2A561JR
R276	J0195001R	RMC73 2B101JR
R277	J0195895R	RMC73S 2A681JR
R281	J0195885R	RMC73S 2A271JR
R282	J0195931R	RMC73S 2A183JR
R300	J0195943R	RMC73S-2A563JR
R303	J0195871R	RMC73S 2A750JR
R305	J0195871R	RMC73S 2A750JR
R306	J0195871R	RMC73S 2A750JR
R307	J0195875R	RMC73S 2A101JR
R309	J0195868R	RM73S 2A560JR 56R
R311	J0195871R	RMC73S 2A750JR
R314	J0195950R	RMC73S 2A104JR
R315	J0196093R	RMC73M-1F103JR
R317	J0195016R	RMC73--2B182JR 1K8 1206
R319	J0195001R	RMC73 2B101JR
R320	J0195871R	RMC73S 2A750JR
R321	J0196043R	RMC73M-1F101JR
R322	J0196043R	RMC73M-1F101JR
R323	J0195871R	RMC73S 2A750JR
R326	J0195871R	RMC73S 2A750JR
R330	J0195871R	RMC73S 2A750JR
R331	J0196043R	RMC73M-1F101JR
R332	J0195950R	RMC73S 2A104JR
R333	J0196043R	RMC73M-1F101JR
R334	J0195868R	RM73S 2A560JR 56R
R335	J0195871R	RMC73S 2A750JR
R336	J0196043R	RMC73M-1F101JR
R337	J0196043R	RMC73M-1F101JR
R338	J0195875R	RMC73S 2A101JR
R339	J0113722M	RDO5S2H750JB
R340	J0195875R	RMC73S 2A101JR
R342	J0195925R	RMC73S 2A103JR
R344	J0195906R	RMC73S--2A182JR
R346	J0700027M	100R 1/16W C/FILM 5%
R347	J0195001R	RMC73 2B101JR
R349	J0195875R	RMC73S 2A101JR
R350	J0195943R	RMC73S-2A563JR
R351	J0195895R	RMC73S 2A681JR
R352	J0196111R	RMC73M - 1F563JR
R353	J0195871R	RMC73S 2A750JR
R355	J0195871R	RMC73S 2A750JR
R356	J0195871R	RMC73S 2A750JR
R357	J0196093R	RMC73M-1F103JR
R358	J0195906R	RMC73S--2A182JR
R359	J0195871R	RMC73S 2A750JR
R360	J0196093R	RMC73M-1F103JR
R361	J0196093R	RMC73M-1F103JR
R389	J0196103R	RMC73M - 1F273JR
R390	J0195895R	RMC73S 2A681JR
R400	J0195900R	RMC73S 2A102JR
R401	J0195950R	RMC73S 2A104JR

A529270 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
R402	J0195945R	RMC73S 2A683JR	R477	J0700027M	100R 1/16W C/FILM 5%
R403	J0195875R	RMC73S 2A101JR	R478	J0700027M	100R 1/16W C/FILM 5%
R404	J0195943R	RMC73S-2A563JR	R479	J0700027M	100R 1/16W C/FILM 5%
R405	J0195943R	RMC73S-2A563JR	R480	J0700027M	100R 1/16W C/FILM 5%
R406	J0196059R	RMC73M-1F471JR	R481	J0700027M	100R 1/16W C/FILM 5%
R407	J0195875R	RMC73S 2A101JR	R482	J0700027M	100R 1/16W C/FILM 5%
R408	J0196068R	RMC73M-1F102JR	R483	J0195875R	RMC73S 2A101JR
R409	J0113725M	100R RES CARBON FILM 1/2W	R484	J0195875R	RMC73S 2A101JR
R410	J0196072R	RMC73M-1F152JR	R485	J0700027M	100R 1/16W C/FILM 5%
R411	J0195900R	RMC73S 2A102JR	R486	J0195925R	RMC73S 2A103JR
R412	J0196113R	RMC73M - 1F683JR	R487	J0700027M	100R 1/16W C/FILM 5%
R413	J0196059R	RMC73M-1F471JR	R488	J0195925R	RMC73S 2A103JR
R414	J0196043R	RMC73M-1F101JR	R489	J0700027M	100R 1/16W C/FILM 5%
R415	J0196059R	RMC73M-1F471JR	R490	J0700027M	100R 1/16W C/FILM 5%
R416	J0196043R	RMC73M-1F101JR	R491	J0195925R	RMC73S 2A103JR
R417	J0195037R	RMC73 2B104JR	R492	J0195925R	RMC73S 2A103JR
R418	J0196043R	RMC73M-1F101JR	R493	J0196068R	RMC73M-1F102JR
R419	J0195950R	RMC73S 2A104JR	R496	J0196088R	RMC73M-1F682JR
R420	J0196066R	RMC73M - 1F911JR	R497	J0196105R	RMC73M-1F333JR
R421	J0196061R	RMC73M-1F561JR 1608	R498	J0196043R	RMC73M-1F101JR
R422	J0196066R	RMC73M - 1F911JR	R499	J0196051R	RMC73M-1F221JR
R423	J0195950R	RMC73S 2A104JR	R500	J0195929R	RMC73S 2A153JR
R424	J0195891R	RMC73S 2A471JR	R501	J0195025R	RMC73 - 2B103JR
R425	J0196074R	RMC73M-1F182JR 1K8 0603	R502	J0196090R	RMC73M-1F822JR 8K2 0603
R426	J0196043R	RMC73M-1F101JR	R504	J0196088R	RMC73M-1F682JR
R427	J0196061R	RMC73M-1F561JR 1608	R509	J0195939R	RMC73S2A393JR
R428	J0196066R	RMC73M - 1F911JR	R532	J0195875R	RMC73S 2A101JR
R429	J0196068R	RMC73M-1F102JR	R533	J0195900R	RMC73S 2A102JR
R430	J0196061R	RMC73M-1F561JR 1608	R534	J0195875R	RMC73S 2A101JR
R431	J0196043R	RMC73M-1F101JR	R535	J0195875R	RMC73S 2A101JR
R432	J0196043R	RMC73M-1F101JR	R536	J0195875R	RMC73S 2A101JR
R433	J0195875R	RMC73S 2A101JR	R537	J0195875R	RMC73S 2A101JR
R434	J0195875R	RMC73S 2A101JR	R538	J0700027M	100R 1/16W C/FILM 5%
R435	J0196066R	RMC73M - 1F911JR	R539	J0700027M	100R 1/16W C/FILM 5%
R436	J0796491R	RMC73M-000R	R540	J0195875R	RMC73S 2A101JR
R437	J0796491R	RMC73M-000R	R541	J0195248R	RMC73--000R
R438	J0196061R	RMC73M-1F561JR 1608	R542	J0700027M	100R 1/16W C/FILM 5%
R439	J0196061R	RMC73M-1F561JR 1608	R543	J0700027M	100R 1/16W C/FILM 5%
R440	J0196066R	RMC73M - 1F911JR	R544	J0195887R	RMC73S 2A331JR
R441	J0196084R	RMC73M-1F472JR	R545	J0195875R	RMC73S 2A101JR
R442	J0700034M	330R 1/16W C/FILM 5%	R546	J0196043R	RMC73M-1F101JR
R446	J0195950R	RMC73S 2A104JR	R547	J0196043R	RMC73M-1F101JR
R447	J0195891R	RMC73S 2A471JR	R548	J0195007R	RMC73--2B331JR
R448	J0196043R	RMC73M-1F101JR	R549	J0195879R	RMC73S 2A151JR
R454	J0195950R	RMC73S 2A104JR	R550	J0196049R	RMC73M-1F181JR 180R 0603
R465	J0196093R	RMC73M-1F103JR	R560	J0195001R	RMC73 2B101JR
R467	J0196093R	RMC73M-1F103JR	R571	J0196068R	RMC73M-1F102JR
R469	J0195875R	RMC73S 2A101JR	R586	J0195891R	RMC73S 2A471JR
R470	J0195875R	RMC73S 2A101JR	R589	J0195910R	RMC73S-2A272JR
R471	J0700027M	100R 1/16W C/FILM 5%	R600	J0196093R	RMC73M-1F103JR
R472	J0195001R	RMC73 2B101JR	R601	R100330	1R0 1/4W DRG NO
R473	J0195001R	RMC73 2B101JR	R602	J0113684M	RNL-2R2J1-02LT
R474	J0196043R	RMC73M-1F101JR	R603	J0113684M	RNL-2R2J1-02LT
R475	J0196043R	RMC73M-1F101JR	R605	J0700075M	390K 1/16W C/FILM 5%
R476	J0196043R	RMC73M-1F101JR	R606	J0195941R	RMC73S 2A473JR

A529270 PARTS LIST

I.D.	Part No.	Description
R607	J0196043R	RMC73M-1F101JR
R608	J0195875R	RMC73S 2A101JR
R612	R237330	2K7 1/4W DRG NO
R613	R658330	680K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R616	J0196068R	RMC73M-1F102JR
R634	R232330	2K2 1/4W DRG NO
R635	R232330	2K2 1/4W DRG NO
R636	J0700051M	5K6 1/16W C/FILM 5%
R637	R120330	100R 1/4W DRG NO
R638	J0700049M	4K7 1/16W C/FILM 5%
R639	J0700049M	4K7 1/16W C/FILM 5%
R666	J0196068R	RMC73M-1F102JR
R667	J0700049M	4K7 1/16W C/FILM 5%
R702	R333330	3K3 1/4W DRG NO
R704	R648330	68K 1/4W DRG NO
R705	J0140933S	RSL-472J7WS(BSR-Z)
R706	R437571	4K7 2W 5% M02SL
R707	R135330	1K5 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R712	J0195925R	RMC73S 2A103JR
R713	J0100069M	RES FLM 1/8W 1.5K
R714	J0113748M	RD14S2H821JB
R715	J0110163S	RS08B3A562JS
R716	J0700054M	10K 1/16W C/FILM 5%
R717	R252330	220K 1/4W DRG NO
R718	R254736	240K 1/4W M/F MFR4 1%
R719	R447736	47K 1/4W 1% MFR4
R720	J0140933S	RSL-472J7WS(BSR-Z)
R724	J0110273S	RSO8B3D153JS
R725	R232570	2K2 1W 5% MO1SL
R735	J0147622	RW99J3Y3R3KM
R736	R433330	4K3 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R738	R232330	2K2 1/4W DRG NO
R740	R457330	470K 1/4W DRG NO
R745	R437330	4K7 1/4W DRG NO
R746	R120571	100R 2W 5% M02SL
R752	R353330	330K 1/4W DRG NO
R757	R447330	47K 1/4W DRG NO
R759	R536330	5K6 1/4W DRG NO
R764	R150330	100K 1/4W DRG NO
R765	J0700027M	100R 1/16W C/FILM 5%
R767	J0195875R	RMC73S 2A101JR
R768	J0196093R	RMC73M-1F103JR
R769	J0195902R	RMC73S 2A122JR
R770	R140330	10K 1/4W DRG NO
R776	R257330	270K 1/4W DRG NO
R778	R145330	15K 1/4W DRG NO
R779	R120571	100R 2W 5% M02SL
R780	R232330	2K2 1/4W DRG NO
R901	R242571	22K 2W M02S
R902	R546330	56K 1/4W DRG NO
R903	R222330	220R 1/4W DRG NO
R905	R150330	100K 1/4W DRG NO
R906	R130330	1K 1/4W DRG NO
R908	R130330	1K 1/4W DRG NO
R909	J0147642	RW99J3Y220JM 22R 7W
R911	R132725	1K2 MRS16T 1% M/F 1/16W
R912	R842736	82K 1% MF MFR4
R913	R447330	47K 1/4W DRG NO
R915	R658725	680K MRS16T 1% M/F
R916	J0700049M	4K7 1/16W C/FILM 5%
R917	R658725	680K MRS16T 1% M/F
R920	R140330	10K 1/4W DRG NO
R921	R546736	56K MFR4 1% 1/4W
R922	R247725	27K MRS16T1% M/FILM
R927	J0110281S	RS08B3D333JS
R932	R120330	100R 1/4W DRG NO
R933	J0700049M	4K7 1/16W C/FILM 5%
R941	R536330	5K6 1/4W DRG NO
R942	R521330	510R 1/4W DRG NO
R943	R120330	100R 1/4W DRG NO
R944	R244725	24K MRS16T 1% 1/16W
R945	R140725	10K MRS16T 1% M/FILM
R946	J0147544	RW99J3H150JM 15R 5W
R950	R433725	4K3 MRS16T 1/16W 1%
R951	R407330	4R7 1/4W DRG NO
R952	J0700058M	22K 1/16W C/FILM 5%
R953	J0700049M	4K7 1/16W C/FILM 5%
R954	J0700049M	4K7 1/16W C/FILM 5%
R956	R000618	0.5R 2W WIRE WOUND 5%
R957	R323330	330R 1/4W DRG NO
R958	R842736	82K 1% MF MFR4
R959	R556725	560K MRS16T 1% M/FILM
R960	R133725	1K3 MRS16T 1% M/FILM
R961	J0700052M	6K8 1/16W C/FILM 5%
R962	R130330	1K 1/4W DRG NO
R963	J0700041M	1K 1/16W C/FILM 5%
R966	R130330	1K 1/4W DRG NO
R967	R252330	220K 1/4W DRG NO
R968	R000618	0.5R 2W WIRE WOUND 5%
R969	R242330	22K 1/4W DRG NO
R970	R120330	100R 1/4W DRG NO
R971	J0144050	ERF5ZK122 1K2 KOA RES 5W
R972	R150744	&100K 3W PRO3 M/F LANCET
R975	J0700041M	1K 1/16W C/FILM 5%
R976	R323330	330R 1/4W DRG NO
R977	R120330	100R 1/4W DRG NO
R978	R323330	330R 1/4W DRG NO
R980	R100551	1R 1/4W FR8225(TDK)-BEAB-
R981	J0700064M	56K 1/16W C/FILM 5%
R982	R319330	39R 1/4W DRG NO
R985	J0187072M	2K0 1/16W PHILIPS
R986	R150330	100K 1/4W DRG NO
R987	R319330	39R 1/4W DRG NO
R988	J0700067M	100K 1/16W C/FILM 5%
R989	E441045	PTC TYPE 2322-662-96624
R990	R316330	36R 1/4W
R991	R353714	330K 1/2W METAL FLM-BEAB

A529270 PARTS LIST

I.D.	Part No.	Description
R992	J0700058M	22K 1/16W C/FILM 5%
R993	J0700056M	15K 1/16W C/FILM 5%
R994	R323330	330R 1/4W DRG NO
R996	R427330	470R 1/4W DRG NO
R997	J0187092M	RD14S1J133JB
R998	R323571	330R 2W 5% MO2S F
R999	R170727	10M 1W VR68 UL BEAB
RA01	J0700027M	100R 1/16W C/FILM 5%
RA02	J0196093R	RMC73M-1F103JR
RA03	J0700047M	3K3 1/16W C/FILM 5%
RA04	J0700055M	12K 1/16W C/FILM 5%
RA05	R120330	100R 1/4W DRG NO
RA06	J0196101R	RMC73M-1F223JR 1608
RA07	J0196111R	RMC73M - 1F563JR
RA08	J0196113R	RMC73M - 1F683JR
RA09	J0196101R	RMC73M-1F223JR 1608
RA10	J0196111R	RMC73M - 1F563JR
RA11	J0196084R	RMC73M-1F472JR
RA12	J0196113R	RMC73M - 1F683JR
RA13	J0196093R	RMC73M-1F103JR
RA14	R120330	100R 1/4W DRG NO
RA15	J0196084R	RMC73M-1F472JR
RA16	J0196104R	RMC73M-1F303JR 30K 0603
RA17	J0195953R	RMC73S-2A134JR 130K
RA18	J0700012M	6R8 1/16W C/FILM 5%
RA19	J0195025R	RMC73 - 2B103JR
RA20	J0187086M	RD14S1J752JB
RA21	J0195025R	RMC73 - 2B103JR
RA22	J0187086M	RD14S1J752JB
RA23	J0196078R	RMC73M-1F272JR
RA24	J0700054M	10K 1/16W C/FILM 5%
RA25	J0196093R	RMC73M-1F103JR
RA26	J0195916R	RMC73S 2A472JR
RA27	R427748	470R 3W PRO3 5% TAPED
RA31	J0796491R	RMC73M-000R
RA32	J0196078R	RMC73M-1F272JR
RA33	J0195945R	RMC73S 2A683JR
RA34	J0195945R	RMC73S 2A683JR
RA35	J0195910R	RMC73S-2A272JR
RA36	J0196045R	RMC73M-1F121JR 120R 1608
RA37	J0196045R	RMC73M-1F121JR 120R 1608
RA38	J0196118R	RMC73M-1F104JR 100K
RA39	J0196030R	RMC73M-1F330JR 33R
RA40	J0196118R	RMC73M-1F104JR 100K
RA41	J0196030R	RMC73M-1F330JR 33R
RA45	J0113725M	100R RES CARBON FILM 1/2W
RM01	J0196043R	RMC73M-1F101JR
RM02	J0196043R	RMC73M-1F101JR
RM05	J0195001R	RMC73 2B101JR
RM06	J0196043R	RMC73M-1F101JR
RM07	J0700027M	100R 1/16W C/FILM 5%
RM08	J0196043R	RMC73M-1F101JR
RM09	J0196043R	RMC73M-1F101JR
RM10	J0196043R	RMC73M-1F101JR
RM13	J0196093R	RMC73M-1F103JR

I.D.	Part No.	Description
RM14	J0196093R	RMC73M-1F103JR
RM15	J0195025R	RMC73 - 2B103JR
RM16	J0195025R	RMC73 - 2B103JR
RM17	J0196093R	RMC73M-1F103JR
RM51	J0700054M	10K 1/16W C/FILM 5%
RS16	J0195916R	RMC73S 2A472JR
RS17	J0196068R	RMC73M-1F102JR
RS18	J0196068R	RMC73M-1F102JR
RS19	J0196068R	RMC73M-1F102JR
RS20	J0195950R	RMC73S 2A104JR
RS21	J0195916R	RMC73S 2A472JR
RS22	J0196068R	RMC73M-1F102JR
RS23	J0195900R	RMC73S 2A102JR
RS24	J0195900R	RMC73S 2A102JR
RS25	J0196118R	RMC73M-1F104JR 100K
RS30	J0195900R	RMC73S 2A102JR
RS32	J0196068R	RMC73M-1F102JR
RS33	J0196118R	RMC73M-1F104JR 100K
RS35	J0196084R	RMC73M-1F472JR
RS38	J0196068R	RMC73M-1F102JR
RS40	J0700049M	4K7 1/16W C/FILM 5%
RS41	J0195900R	RMC73S 2A102JR
RS46	J0196118R	RMC73M-1F104JR 100K
RS47	J0196068R	RMC73M-1F102JR
RS49	J0700041M	1K 1/16W C/FILM 5%
RS50	J0196068R	RMC73M-1F102JR
RS51	J0196118R	RMC73M-1F104JR 100K
RS53	J0196068R	RMC73M-1F102JR
RS54	J0196068R	RMC73M-1F102JR
RS55	J0700049M	4K7 1/16W C/FILM 5%
RS60	J0196118R	RMC73M-1F104JR 100K
RS61	J0196084R	RMC73M-1F472JR
RS62	J0700041M	1K 1/16W C/FILM 5%
RS64	J0195900R	RMC73S 2A102JR
RS65	J0195900R	RMC73S 2A102JR
RS91	J0195871R	RMC73S 2A750JR
S001	E139506	5 WAY TACT SWITCH
SCART1	E826946	A20 DOUBLE SCART
SCART2	E826945	SINGLE SCART METALLO
SHROUD	X321241	&ACTUATOR SHROUD
SW900	J2634732	SWITCH SDD-FC BEAB
T700	JBW02021	FBT HFL1735LD 32" BEAB
T700A	G201316	M3 X 16 SCREW
T700B	N332067	SPACER
T702	J2260291U	H DRIVE TRANSFORMER TAW
T900	L380183	SMT4 +/- 17V BEAB
T902	L380181	SW MODE XXXX CT286D8 BEAB
VR904	E311108	500R POT HORIZONTAL TAPE
VR964	J0160211R	EVND8AA03B13-TAPE(PANA)
W002	EC5A100A	7/0.2MM S000030
W003	EC5A060A	7/0.2MM S000030
W005	EC530603	7/0.2MM S000010
W008	EC5A120A	7/0.2 S000030
W009	EC5A060A	7/0.2MM S000030
W010	EC530903	7/0.2MM S000029

A529270 PARTS LIST

I.D.	Part No.	Description
W017	EC530503	7/0.2MM S000029
W018	EC530203	7/0.2MM S000010
W019	EC530603	7/0.2MM S000010
W020	EC530303	7/0.2MM S000010
W021	EC5A120A	7/0.2 S000030
W022	EC530903	7/0.2MM S000029
W023	EC530203	7/0.2MM S000010
W024	EC5A110A	7/0.2MM S000030
W025	EC531603	7/0.2 S000029
W026	EC531603	7/0.2 S000029
X001	E516081F	CRYSTAL 6MHZ
X200	E518054	K9453M
X219	E518053	K3953M
X305	L420187	BLM11A102S
X513	E516030F	12MHz X'TAL NDK 5MM LEG
Z005	T536219	BZX79B3V3~PHILIPS~
Z006	T536312	PDZ-B 3.6B 2% SMT ZENER
Z007	T536279	BZX284-C5V6 5% S MOUNT
Z008	T536279	BZX284-C5V6 5% S MOUNT
Z014	T536312	PDZ-B 3.6B 2% SMT ZENER
Z205	T536215	BZX 79C 33V~PHILIPS~
Z404	T536181	BZX79C 13V~PHILIPS~
Z501	T536184	BZX79C 9V1~PHILIPS~
Z502	T536184	BZX79C 9V1~PHILIPS~
Z503	T536184	BZX79C 9V1~PHILIPS~
Z504	T536184	BZX79C 9V1~PHILIPS~
Z505	T536284	BZX284-C9V1
Z506	T536284	BZX284-C9V1
Z507	T536277	BZX284-C 4V7 5%
Z600	T536178	BZX79C 3V3~PHILIPS~
Z601	T536178	BZX79C 3V3~PHILIPS~
Z603A	T536173	BZX79C18V~PHILIPS~
Z603B	T536215	BZX 79C 33V~PHILIPS~
Z604	T536259	BZX79C56V
Z607	T536284	BZX284-C9V1
Z608	T536284	BZX284-C9V1
Z610	T536173	BZX79C18V~PHILIPS~
Z615	T536172	BZX79C27V~PHILIPS~
Z616	T536280	BZX284-C6V2
Z703	T536235	BZX79B18V~PHILIPS~
Z713	J2339251M	HZS36-ILT
Z741	T536259	BZX79C56V
Z744	T536227	BZX79B7V5~PHILIPS~
Z900	T536266	BZV85-C27V
Z927	T536173	BZX79C18V~PHILIPS~
Z942	T536179	BZX79C 6V2~PHILIPS~
Z964	T536236	BZX79B22V~PHILIPS~
Z990	T536173	BZX79C18V~PHILIPS~
Z991	T536173	BZX79C18V~PHILIPS~
Z992	T536173	BZX79C18V~PHILIPS~
ZA01	T536279	BZX284-C5V6 5% S MOUNT
ZA08	T536268	BZV85-C22V
ZA10	T536172	BZX79C27V~PHILIPS~
ZR048A	W470200	1MM 1/D SLEEVING BLACK
ZR048B	W470200	1MM 1/D SLEEVING BLACK

I.D.	Part No.	Description
ZS14	T536271	BZX284-C2V7
ZS25	T536271	BZX284-C2V7
ZS31	T536271	BZX284-C2V7
ZS42	T536271	BZX284-C2V7
ZS51	T536271	BZX284-C2V7
ZS60	T536271	BZX284-C2V7
ZZA08	W470200	1MM 1/D SLEEVING BLACK

A529280 PARTS LIST

#15	E573018	FERRITE CLAMP CORE
#200	J3731082	PURSE LOCK
#27	L350016	FERRITE CORE
#270	J2123462M	FERRITE BEADS TYPE B2.3UH
#40	E573018	FERRITE CLAMP CORE
#4069	J3731082	PURSE LOCK
#500	E573018	FERRITE CLAMP CORE
#5000	N937052	CHASSIS FRAME
#5071	G291311	3X12 BT SCREW (BLACK)
#5072	G291311	3X12 BT SCREW (BLACK)
#5073	G291311	3X12 BT SCREW (BLACK)
#5075	N332067	SPACER
#67	J3731082	PURSE LOCK
#68	J3731082	PURSE LOCK
#802	G864006	CABLE TIE T18R
#E802	JBM00041	FERRITE CORES BP53RB
AV300	JEU00581	PHONO-S/VHS CONNECTOR
B001	PC55002	A20 MAIN PCB BEAB
C001	J0893179R	CKM-104K160B-CNT1608
C002	J0893027R	CKM-104K250B-CNT2125
C003	J0800271R	ELECT CAP 0.1UF 50V SMG
C004	J0800282R	CAP ELECTRO 2.2UF-M 50V
C005	J0800291R	CAP ELEC 10uF 16V SMG
C007	J0800282R	CAP ELECTRO 2.2UF-M 50V
C008	J0800291R	CAP ELEC 10uF 16V SMG
C009	J0800291R	CAP ELEC 10uF 16V SMG
C010	J0893179R	CKM-104K160B-CNT1608
C011	J0893179R	CKM-104K160B-CNT1608
C012	J0893027R	CKM-104K250B-CNT2125
C013	J0227219R	CK73B1H104KR 100N 1206
C014	J0800317R	CP ELECTRO 47UF SMG 16
C015	J0893179R	CKM-104K160B-CNT1608
C016	J0228042R	CC73SCH1H330JR
C017	J0228042R	CC73SCH1H330JR
C019	J0893222R	CKM-103K500B-CNT1608
C020	J0800271R	ELECT CAP 0.1UF 50V SMG
C202	J0800364F	CAP ELECT 1000UF 50V SMG
C203	J0800361F	CAP ELEC 1000UF-M SMG 16V
C204	J0227219R	CK73B1H104KR 100N 1206
C205	J0800317R	CP ELECTRO 47UF SMG 16
C206	J0893044R	CKM 103K500B CNT2125
C208	J0800291R	CAP ELEC 10uF 16V SMG
C209	J0893044R	CKM 103K500B CNT2125
C210	J0893222R	CKM-103K500B-CNT1608
C211	J0893123R	CC73MCH1H560JR
C212	J0893113R	CC73MCH1H100C
C213	J0893044R	CKM 103K500B CNT2125
C215	J0893222R	CKM-103K500B-CNT1608
C220	J0893044R	CKM 103K500B CNT2125
C301	J0800352R	ELEC CAP 470UF 10V SMG
C302	J0227009R	CK73B1H102KR 1N 1206
C303	J0893027R	CKM-104K250B-CNT2125
C304	J0893027R	CKM-104K250B-CNT2125
C305	J0880194R	0.1UF 50V +-5% (100N)
C309	J0800352R	ELEC CAP 470UF 10V SMG
C310	J0893031R	CKM 102K500B CNT2125
C312	J0893179R	CKM-104K160B-CNT1608
C313	J0893027R	CKM-104K250B-CNT2125
C318	J0893027R	CKM-104K250B-CNT2125
C324	J0893179R	CKM-104K160B-CNT1608
C325	J0893179R	CKM-104K160B-CNT1608
C326	J0893179R	CKM-104K160B-CNT1608
C327	J0880194R	0.1UF 50V +-5% (100N)
C328	J0893027R	CKM-104K250B-CNT2125
C329	J0893027R	CKM-104K250B-CNT2125
C331	J0800326R	CEL-101M160WMFT
C332	J0800317R	CP ELECTRO 47UF SMG 16
C345	J0227219R	CK73B1H104KR 100N 1206
C369	J0800326R	CEL-101M160WMFT
C370	J0893027R	CKM-104K250B-CNT2125
C371	J0800326R	CEL-101M160WMFT
C372	J0893027R	CKM-104K250B-CNT2125
C373	J0800326R	CEL-101M160WMFT
C374	J0227219R	CK73B1H104KR 100N 1206
C401	J0893208R	CKM-102K500B-CNT1608
C403	J0893126R	CCM-101J500CHCNT1608
C404	J0800294R	ELECT CAP 10UF 50V SMG
C405	J0893031R	CKM 102K500B CNT2125
C406	J0228054R	CC73SCH1H101JR
C407	J0800294R	ELECT CAP 10UF 50V SMG
C408	J0893031R	CKM 102K500B CNT2125
C410	J0227009R	CK73B1H102KR 1N 1206
C411	J0228054R	CC73SCH1H101JR
C412	J0893031R	CKM 102K500B CNT2125
C413	J0228054R	CC73SCH1H101JR
C414	J0800294R	ELECT CAP 10UF 50V SMG
C415	J0893031R	CKM 102K500B CNT2125
C416	J0800294R	ELECT CAP 10UF 50V SMG
C417	J0893208R	CKM-102K500B-CNT1608
C420	J0800291R	CAP ELEC 10uF 16V SMG
C422	J0893031R	CKM 102K500B CNT2125
C423	J0893027R	CKM-104K250B-CNT2125
C424	J0800291R	CAP ELEC 10uF 16V SMG
C425	J0893027R	CKM-104K250B-CNT2125
C429	J0893208R	CKM-102K500B-CNT1608
C430	J0893208R	CKM-102K500B-CNT1608
C431	J0227449R	CK73B1E334ZR 330N 25V
C432	J0227449R	CK73B1E334ZR 330N 25V
C433	J0227449R	CK73B1E334ZR 330N 25V
C434	J0227449R	CK73B1E334ZR 330N 25V
C435	J0800291R	CAP ELEC 10uF 16V SMG
C436	J0800294R	ELECT CAP 10UF 50V SMG
C437	J0800291R	CAP ELEC 10uF 16V SMG
C438	J0893179R	CKM-104K160B-CNT1608
C439	C353883	GRM40Y5V334Z16PT
C440	J0893027R	CKM-104K250B-CNT2125
C441	J0227449R	CK73B1E334ZR 330N 25V
C442	J0227449R	CK73B1E334ZR 330N 25V
C443	J0893248R	CKM-334Z160B-CNT1608
C444	C353883	GRM40Y5V334Z16PT
C445	C353883	GRM40Y5V334Z16PT
C446	C353883	GRM40Y5V334Z16PT

A529280 PARTS LIST

C447	C353883	GRM40Y5V334Z16PT
C448	C353883	GRM40Y5V334Z16PT
C449	J0893027R	CKM-104K250B-CNT2125
C450	J0800291R	CAP ELEC 10uF 16V SMG
C451	J0800294R	ELECT CAP 10UF 50V SMG
C452	J0893197R	CKM-223K250B-CNT1608
C454	J0893027R	CKM-104K250B-CNT2125
C455	J0893123R	CC73MCH1H560JR
C456	J0893123R	CC73MCH1H560JR
C457	J0893123R	CC73MCH1H560JR
C458	J0893126R	CCM-101J500CHCNT1608
C459	C608886	& GRM40COG6R8D50PT 6.8PF
C460	C608886	& GRM40COG6R8D50PT 6.8PF
C461	J0893123R	CC73MCH1H560JR
C462	J0893213R	CC73MCH1H222JR
C463	J0893179R	CKM-104K160B-CNT1608
C465	J0800294R	ELECT CAP 10UF 50V SMG
C466	J0800353R	CAP ELECTRO 470UF 16V
C467	J0800294R	ELECT CAP 10UF 50V SMG
C468	J0893031R	CKM 102K500B CNT2125
C470	J0893179R	CKM-104K160B-CNT1608
C471	J0800327R	ELECT CAP 100UF 25V SMG
C500	J0893039R	CKM 472K500B CNT 2125
C501	J0800279R	ELECT CAP 1.UF 50V
C502	J0195250R	RMC73S 000R
C503	J0893044R	CKM 103K500B CNT2125
C504	J0800279R	ELECT CAP 1.UF 50V
C506	J0890087R	CAP CERAMIC 1000pf-B 50V
C508	J0893222R	CKM-103K500B-CNT1608
C509	J0893222R	CKM-103K500B-CNT1608
C510	J0227436R	0.22U +/-10% 1206 SMT
C511	J0893206R	680PF +/-10% 0603 SMT
C518U	C150711	CAP 100N 36521104 100V POL
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
C572	J0228066R	GRM40CDG331J50PT
C575	J0893027R	CKM-104K250B-CNT2125
C576	J0893048R	CKM-223K500B-CNT2125
C577	J0893027R	CKM-104K250B-CNT2125
C578	J0893027R	CKM-104K250B-CNT2125
C579	J0893027R	CKM-104K250B-CNT2125
C581	J0880016R	POLY CAP FLM 0.1UF 50V
C582	J0893027R	CKM-104K250B-CNT2125
C583	J0195250R	RMC73S 000R
C585	J0800372F	CEL 332 M160WNL SMG 5MM
C586	J0893027R	CKM-104K250B-CNT2125
C588	J0893027R	CKM-104K250B-CNT2125
C589	J0893039R	CKM 472K500B CNT 2125
C590	J0195250R	RMC73S 000R
C591	J0195250R	RMC73S 000R
C592	J0195250R	RMC73S 000R
C593	J0800279R	ELECT CAP 1.UF 50V
C594	J0228038R	CC73SCH1H220JR
C595	J0228038R	CC73SCH1H220JR
C596	J0893027R	CKM-104K250B-CNT2125
C597	J0800372F	CEL 332 M160WNL SMG 5MM
C598	C457884	&GRM40X7R474K25PT 470N
C599	J0893035R	CKM--222K500B CNT2125
C602	J0800337R	CEL-221M350WMFT
C603	J0800329R	ELECT CAP 100UF 50V SMG
C604	J0880044R	CAP POLYESTER 0.01UF K50V
C605	C150711	CAP 100N 36521104 100V POL
C606	J0893027R	CKM-104K250B-CNT2125
C607	J0893027R	CKM-104K250B-CNT2125
C610	J0890092R	CAP CERAMIC 0.0022uF 50V
C616	J0800339F	CAP ELECT 220UF 63V
C617	J0227009R	CK73B1H102KR 1N 1206
C620	J0893027R	CKM-104K250B-CNT2125
C621	J0893208R	CKM-102K500B-CNT1608
C639	J0800292R	CAP ELECT 10UF 25V SMG
C644	J0890092R	CAP CERAMIC 0.0022uF 50V
C701	J0243507R	CK45B2H331KB
C702	J0257540F	ELEC CAP 4U7 250V
C703	C140760	10n 2KV R/EVOX PHE428
C704	JAJ00138F	CC-222K202R-DF 2N2 2KV
C705	J0299993F	CAP 18NF 5% 630V POLY
C706	J0890087R	CAP CERAMIC 1000pf-B 50V
C707	JAJ00134R	CK45-R3DD102K 1N 2KV
C708	J0244505R	CER CAP 2n2-K 500V
C709	J0253953R	CE04W2C2R2M
C710	J0253953R	CE04W2C2R2M
C711	C353764	&330N MKP379 44334
C712	C353764	&330N MKP379 44334
C713	C353764	&330N MKP379 44334
C714	C158764	180N MKP379 44184
C715	J0243512R	CK45B2H821KB
C716	C140707	CAP 10N 365-51103 MULARD
C719	J0257540F	ELEC CAP 4U7 250V
C720	J0880033R	CQM-152K500HFT
C724	JAJ00121R	CK45-R3DD101K 100PF 2KV
C726	J0800336R	CAP ELEC 220UF M SMG 25V
C727	J0243507R	CK45B2H331KB
C732	J0800291R	CAP ELEC 10uF 16V SMG
C735U	J0880044R	CAP POLYESTER 0.01UF K50V
C737	C160708	1UF +-10% 250V 368-45105
C740	J0244509R	CER CAP 4700PF-K 500V
C741	J0244509R	CER CAP 4700PF-K 500V
C742	J0800337R	CEL-221M350WMFT
C743	J0880053R	CQ93M1H473KEB(MF) N/PAN
C747	J0250511R	CAP POLY 0.022UF PHILIPS
C748	JAJ00134R	CK45-R3DD102K 1N 2KV
C749	J0880194R	0.1UF 50V +-5% (100N)
C764	J0800279R	ELECT CAP 1.UF 50V
C769	JAJ00134R	CK45-R3DD102K 1N 2KV
C770	J0800292R	CAP ELECT 10UF 25V SMG
C900	C150763	&100NF 20% X2 275V BEABT
C901	J0262774N	0.22UF 250VAC X2 ~BEABT
C902	J0262774N	0.22UF 250VAC X2 ~BEABT
C903	J0890083R	CK45 B1H471KB
C904	C648763	&68NF 20% X2 275V BEABT
C905	C001561	ELECT CAP 100UF 250V
C908	J0800329R	ELECT CAP 100UF 50V SMG
C909	J0800352R	ELEC CAP 470UF 10V SMG

A529280 PARTS LIST

C910	J0880044R	CAP POLYESTER 0.01UF K50V
C911	J0800328R	CEL-101M350WMFT
C912	J0244505R	CER CAP 2n2-K 500V
C913	J0800327R	ELECT CAP 100UF 25V SMG
C914	C005046	ELECT 1000UF 25V LXY
C915	J0800354R	470UF 25V SMG
C916	C005046	ELECT 1000UF 25V LXY
C917	J0880048R	CQT223K50MB (PANASONIC)
C918	C001561	ELECT CAP 100UF 250V
C919	J0890078R	CK45B1H221KB (MURATA)
C920	C001561	ELECT CAP 100UF 250V
C921	C001561	ELECT CAP 100UF 250V
C922	J0880037R	CQM332K500HFT
C923	J0880037R	CQM332K500HFT
C924	J0800294R	ELECT CAP 10UF 50V SMG
C925	JAJ00121R	CK45-R3DD101K 100PF 2KV
C926	JAJ00127R	CK45-R3DD 331K
C927	JAJ00121R	CK45-R3DD101K 100PF 2KV
C929	J0800327R	ELECT CAP 100UF 25V SMG
C931	JAJ00138F	CC-222K202R-DF 2N2 2KV
C932	J0880037R	CQM332K500HFT
C933	J0253491F	ELEC CAP 100UF 200V
C936	J0880051R	CQ93M1H333KEB PANASONIC
C942	J0880042R	CQ93M1H682KEB(MF) N/PAN
C950	J0259431F	ELEC CAP 220UF 200V
C951	J0800362F	CAP ELECT 1000UF 25V SMG
C952	J0800362F	CAP ELECT 1000UF 25V SMG
C953	J0243509R	CERAMIC CAP 470p 500V
C954	J0243509R	CERAMIC CAP 470p 500V
C955	JAJ00129R	CK45-R3DD 471K
C957	J0243509R	CERAMIC CAP 470p 500V
C959	J0800353R	CAP ELECTRO 470UF 16V
C960	J0244501R	CER CAP 1000PF-K 500V
C961	J0244501R	CER CAP 1000PF-K 500V
C962	J0244501R	CER CAP 1000PF-K 500V
C963	J0244501R	CER CAP 1000PF-K 500V
C964	J0243511R	CER CAP 680PF-K 500V
C967	J0243509R	CERAMIC CAP 470p 500V
C970	J0800345R	ELECT CAP 330UF 25V SMG
C971	J0880044R	CAP POLYESTER 0.01UF K50V
C977	J0243509R	CERAMIC CAP 470p 500V
C986	J0800328R	CEL-101M350WMFT
C987	J0800352R	ELEC CAP 470UF 10V SMG
C990	J0880048R	CQT223K50MB (PANASONIC)
C991	E884110	SPARK GAP 10N 2KV SDUK 16
C992	J0880044R	CAP POLYESTER 0.01UF K50V
C993	C150891	100N 500V CAP
C994	J0800327R	ELECT CAP 100UF 25V SMG
C995	J0880037R	CQM332K500HFT
C997	J0880031R	CQ93M1H102KEB (MF) N/PAN
C999	C232753	2N2 4KVAC PME294 UL BEABT
CA01U	J0880198R	POLY CAP 0.22UF-J 50V
CA02U	J0880198R	POLY CAP 0.22UF-J 50V
CA03	J0880198R	POLY CAP 0.22UF-J 50V
CA04	J0893031R	CKM 102K500B CNT2125
CA05	J0893031R	CKM 102K500B CNT2125
CA06	J0893118R	CCM-270J500CHCNT1608
CA07	C001550	4700UF 25V SMG S/LEG
CA08	J0893135R	CC73MCH1H471JR 1608
CA09	J0893179R	CKM-104K160B-CNT1608
CA10	J0893133R	CC73MCH1H331JR
CA11	J0893135R	CC73MCH1H471JR 1608
CA12	J0893135R	CC73MCH1H471JR 1608
CA13	J0284623R	CEL-1R0M500WMFT(BP)E
CA14	C001550	4700UF 25V SMG S/LEG
CA15	C343882	GRM40X7R333K50-550
CA16	J0880198R	POLY CAP 0.22UF-J 50V
CA17	J0893208R	CKM-102K500B-CNT1608
CA18	J0893208R	CKM-102K500B-CNT1608
CA20	J0893027R	CKM-104K250B-CNT2125
CA21	J0228070R	MINI CHIP 470PF-J CH 50V
CA22	J0893133R	CC73MCH1H331JR
CA24	J0893027R	CKM-104K250B-CNT2125
CA25	J0880064R	CQM - 334J500HFT
CA27	J0893031R	CKM 102K500B CNT2125
CA28	J0284623R	CEL-1R0M500WMFT(BP)E
CA29	C343882	GRM40X7R333K50-550
CA30	J0893208R	CKM-102K500B-CNT1608
CA31	J0800291R	CAP ELEC 10uF 16V SMG
CA32	J0893179R	CKM-104K160B-CNT1608
CA33	J0893179R	CKM-104K160B-CNT1608
CA34	J0893222R	CKM-103K500B-CNT1608
CA35	J0800316R	47u 10V ELECT CAP SMG
CA36	J0800316R	47u 10V ELECT CAP SMG
CA37	J0800325R	CEL-101M100WMFT
CA38	J0800325R	CEL-101M100WMFT
CA39	J0893219R	CCM-682K500B-CNT1608
CA40	J0893042R	CKM 682K500B CNT2125
CA41	J0800325R	CEL-101M100WMFT
CA42	J0284623R	CEL-1R0M500WMFT(BP)E
CA44	J0284623R	CEL-1R0M500WMFT(BP)E
CS20	J0800326R	CEL-101M160WMFT
CS40B	JAA00381R	10UF 6.3V SMT 3216
CS44	J0893126R	CCM-101J500CHCNT1608
CS45	J0893126R	CCM-101J500CHCNT1608
CS60B	JAA00381R	10UF 6.3V SMT 3216
CS62	J0893126R	CCM-101J500CHCNT1608
CS63	J0893126R	CCM-101J500CHCNT1608
CU01	J0800359R	CEL-102M100WMFT
D001	T531069	SHOTTKY 30V/200mA/BAT254
D002	T531067	DIODE BAS216 S/MOUNT
D003	T531067	DIODE BAS216 S/MOUNT
D004	T531069	SHOTTKY 30V/200mA/BAT254
D006	T531069	SHOTTKY 30V/200mA/BAT254
D007	T531069	SHOTTKY 30V/200mA/BAT254
D008	T531069	SHOTTKY 30V/200mA/BAT254
D009	T531069	SHOTTKY 30V/200mA/BAT254
D011	J2343963M	MPG06J (TAPE) GI
D015	T531067	DIODE BAS216 S/MOUNT
D016	T531069	SHOTTKY 30V/200mA/BAT254
D017	T531069	SHOTTKY 30V/200mA/BAT254
D018	T531069	SHOTTKY 30V/200mA/BAT254

A529280 PARTS LIST

D206	T531067	DIODE BAS216 S/MOUNT
D208	T531067	DIODE BAS216 S/MOUNT
D209	T531067	DIODE BAS216 S/MOUNT
D301	T531068	DIODE MA723/TP PANASONIC
D501	T531067	DIODE BAS216 S/MOUNT
D502	T531056	DIODE BYV10-40 ~MULLARD
D503	T531056	DIODE BYV10-40 ~MULLARD
D507	T531067	DIODE BAS216 S/MOUNT
D508	J2348921M	DIODE 1N4531
D522	T531068	DIODE MA723/TP PANASONIC
D523	T531069	SHOTTKY 30V/200mA/BAT254
D601	J2348921M	DIODE 1N4531
D603	T531067	DIODE BAS216 S/MOUNT
D604	T431113	DIODE BYD33J MULL BEAB
D607	T531053	DIODE IN4148 MULL/PHIL/ITT
D608	T531053	DIODE IN4148 MULL/PHIL/ITT
D610	T431113	DIODE BYD33J MULL BEAB
D611	T431113	DIODE BYD33J MULL BEAB
D622	J2343962M	MPG06G
D645	T536259	BZX79C56V
D701	T431113	DIODE BYD33J MULL BEAB
D702	T431113	DIODE BYD33J MULL BEAB
D703	J2343941M	RGP10G
D706	T431117F	DIODE BY228 P/F PHILIPS
D707	T531086F	BYW96E
D708	J2336612	RU3AM
D711	T531086F	BYW96E
D713	T431113	DIODE BYD33J MULL BEAB
D714	T431113	DIODE BYD33J MULL BEAB
D715	J2348921M	DIODE 1N4531
D716	J2348921M	DIODE 1N4531
D735	T431113	DIODE BYD33J MULL BEAB
D739	J2348921M	DIODE 1N4531
D745	J2348921M	DIODE 1N4531
D904	J2348921M	DIODE 1N4531
D905	T431113	DIODE BYD33J MULL BEAB
D906	T431113	DIODE BYD33J MULL BEAB
D907	T531055	DIODE BAT85 SCHOTTKY MULL
D910	J2348921M	DIODE 1N4531
D911	J2348921M	DIODE 1N4531
D913	J2348921M	DIODE 1N4531
D914	J2348921M	DIODE 1N4531
D915	T431113	DIODE BYD33J MULL BEAB
D916	T431113	DIODE BYD33J MULL BEAB
D919	T531086F	BYW96E
D920	J2342711M	DIODE EM2A (SANKEN)
D921	J2342711M	DIODE EM2A (SANKEN)
D922	J2342711M	DIODE EM2A (SANKEN)
D923	J2342711M	DIODE EM2A (SANKEN)
D924	J2342711M	DIODE EM2A (SANKEN)
D925	T431122	DIODE BYV28-200~PHILIPS~
D927	J2348921M	DIODE 1N4531
D931	J2342711M	DIODE EM2A (SANKEN)
D933	T536259	BZX79C56V
D934	T431114	& BYD33M
D939	T431113	DIODE BYD33J MULL BEAB
D953	T431145	BYW29E-200
D953A	H224075	H/SINK F9-4-220 &TAG COL
D955	T431127	BYR29F-700
D955A	H235369	FI2-32-2LA-2 HEATSINK
D955B	G291023	M2.5x8 TAPTITE SCREW
D955C	G560333	M2.5 SPRING WASHER
D960	J2342711M	DIODE EM2A (SANKEN)
D961	J2342711M	DIODE EM2A (SANKEN)
D962	J2342711M	DIODE EM2A (SANKEN)
D963	J2342711M	DIODE EM2A (SANKEN)
D970	T431113	DIODE BYD33J MULL BEAB
D977	T431122	DIODE BYV28-200~PHILIPS~
D982	J2348921M	DIODE 1N4531
D984	T531053	DIODE IN4148 MULL/PHIL/ITT
D991	T431113	DIODE BYD33J MULL BEAB
D992	T431120	DIODE BYV27-150 ~MULLARD~
D994	T531055	DIODE BAT85 SCHOTTKY MULL
D995	T531053	DIODE IN4148 MULL/PHIL/ITT
D996	J2348921M	DIODE 1N4531
D997U	J2348921M	DIODE 1N4531
DA01	T531067	DIODE BAS216 S/MOUNT
DA02	J2348921M	DIODE 1N4531
DA03	T531067	DIODE BAS216 S/MOUNT
DS42	T531067	DIODE BAS216 S/MOUNT
DS60	T531067	DIODE BAS216 S/MOUNT
E002	E843366	OSD SHIELDED LEAD
E04	E843369	SPEAKER LEAD
E10	E846825	A5 SCREEN LD 2PIN EHUK
E1015	E843304	4 WAY LD 430mm(PS06/E413)
E206	E843314	CPT EARTH LEAD
E207	E843314	CPT EARTH LEAD
E208	E843286	GROUND LEAD FEMALE
E30	E846825	A5 SCREEN LD 2PIN EHUK
E500	E843376	OSD SHIELDED LEAD
E601	J2661752	3P PLUG PIN/BASE UL BEAB
E802	E843351	A20 8 WAY CRT BASE LEAD
E803	E846902	A7 CRT BASE LEAD 550mm
F900	J2722446	FUS-4A T4AH 250V BEABT
F900A	J2721792	FUSE HOLDER UL/BEAB
F901	E882359	FUSE GLASS T2.0AL BEABT
F901A	J2721792	FUSE HOLDER UL/BEAB
HS01	E826160	H/P SKT HSJ3000-01-010
I001	T900956	LE33CZ TO92
I003	E730303	IC M8_IP
I003A	E823935	52WAY IC SKT ~ FELCO
I004	T900779	74HC595
I006	T900989	M24C16-W SMT
I007	T900980	M62703ML
I302	T900762	IC 4053 SO16N
I303	T900762	IC 4053 SO16N
I304	T900762	IC 4053 SO16N
I401	T900936	MSP3410D C5
I403	T901002	BA10358
I501	T900959	TDA8879
I601	T900951	TDA8358J
I601A	H235475	HEATSINK A20

A529280 PARTS LIST

I601B	G884020	SPRING CLIP 56379-MULLARD
I900	T900452	UC3844 SGS/UNITRODE
I902	T900815	& UC3843N SGS
I903	T901000	L78M05CV 500MA REGULATOR
I903A	H224085	F9-4-220D-2LS
I904	T900345	REG 7805 SGS/MOTO/NEC
I904A	G884023	SPRING CLIP
I905	T900963	IC VIPER 20
I905A	H224085	F9-4-220D-2LS
I943	T900796	&TL431CZ-AP SGS
I964	T548013	CNY17F1/6 SIEMENS BEABT
I997	T548016	PC817B OPTO BEAB
I998	T548016	PC817B OPTO BEAB
I999	T548013	CNY17F1/6 SIEMENS BEABT
IA01	T900955	TDA7490L
IA04	T900978	TDA2822D SO8
IR01	T549018	& IR REC TSOP2838UH1 TEMIC
K118	J0796491R	RMC73M-000R
K120	J0195248R	RMC73--000R
K121	J0195248R	RMC73--000R
K126	J0796491R	RMC73M-000R
K129	J0195250R	RMC73S 000R
K132	J0195248R	RMC73--000R
K133	J0796491R	RMC73M-000R
K135	J0195248R	RMC73--000R
K136	J0195248R	RMC73--000R
K137	J0796491R	RMC73M-000R
K139	J0195248R	RMC73--000R
K141	J0195250R	RMC73S 000R
K142	J0195250R	RMC73S 000R
K146	J0195248R	RMC73--000R
K152	J0195250R	RMC73S 000R
K157	J0195248R	RMC73--000R
K16	J0195250R	RMC73S 000R
K161	J0195248R	RMC73--000R
K165	J0195248R	RMC73--000R
K166	J0796491R	RMC73M-000R
K167	J0195250R	RMC73S 000R
K168	J0195250R	RMC73S 000R
K170	J0796491R	RMC73M-000R
K171	J0195248R	RMC73--000R
K175	J0195250R	RMC73S 000R
K176	J0195250R	RMC73S 000R
K182	J0796491R	RMC73M-000R
K183	J0796491R	RMC73M-000R
K189	J0796491R	RMC73M-000R
K192	J0796491R	RMC73M-000R
K197	J0195248R	RMC73--000R
K198	J0195248R	RMC73--000R
K199	J0195250R	RMC73S 000R
K20	J0195250R	RMC73S 000R
K200	J0195248R	RMC73--000R
K202	J0195250R	RMC73S 000R
K203	J0195248R	RMC73--000R
K206	J0796491R	RMC73M-000R
K216	J0796491R	RMC73M-000R
K220	J0796491R	RMC73M-000R
K225	J0195248R	RMC73--000R
K231	J0195248R	RMC73--000R
K233	J0195250R	RMC73S 000R
K236	J0195250R	RMC73S 000R
K237	J0195250R	RMC73S 000R
K240	J0195250R	RMC73S 000R
K241	J0195250R	RMC73S 000R
K242	J0195250R	RMC73S 000R
K243	J0195250R	RMC73S 000R
K25	J0195248R	RMC73--000R
K262	J0195250R	RMC73S 000R
K266	J0195250R	RMC73S 000R
K267	J0796491R	RMC73M-000R
K271	J0796491R	RMC73M-000R
K288	J0195248R	RMC73--000R
K289	J0796491R	RMC73M-000R
K293	J0195248R	RMC73--000R
K299	J0796491R	RMC73M-000R
K300	J0195250R	RMC73S 000R
K303	J0195250R	RMC73S 000R
K310	J0195250R	RMC73S 000R
K333	J0796491R	RMC73M-000R
K341	J0195248R	RMC73--000R
K343	J0195248R	RMC73--000R
K345	J0796491R	RMC73M-000R
K346	J0796491R	RMC73M-000R
K350	J0195248R	RMC73--000R
K39	J0195250R	RMC73S 000R
K504	J0195250R	RMC73S 000R
K510	J0796491R	RMC73M-000R
K512	J0195248R	RMC73--000R
K513	J0796491R	RMC73M-000R
K64	J0195250R	RMC73S 000R
K66	J0195248R	RMC73--000R
K67	J0195248R	RMC73--000R
K68	J0796491R	RMC73M-000R
K84	J0195248R	RMC73--000R
K85	J0195250R	RMC73S 000R
K86	J0195250R	RMC73S 000R
K87	A306099	BRACKET ASSEMBLY
K88	J0195248R	RMC73--000R
KVR900	W024001	0.56ML SFT TIN'D COP WIRE
L001	J2122943M	AXIAL COIL 10UH-J
L002	J2122943M	AXIAL COIL 10UH-J
L003	J2122943M	AXIAL COIL 10UH-J
L200	J0195250R	RMC73S 000R
L201	J0195250R	RMC73S 000R
L202	J0195250R	RMC73S 000R
L203	J0195250R	RMC73S 000R
L204	J0195250R	RMC73S 000R
L205	J0195250R	RMC73S 000R
L208	J0195250R	RMC73S 000R
L210	J0195250R	RMC73S 000R
L256	J2123781R	FILTER COIL EL101K
L309	L420187	BLM11A102S

A529280 PARTS LIST

L310	L420187	BLM11A102S
L311	J0796491R	RMC73M-000R
L312	J0195250R	RMC73S 000R
L313	J0796491R	RMC73M-000R
L314	J0796491R	RMC73M-000R
L315	J0796491R	RMC73M-000R
L317	J0796491R	RMC73M-000R
L318	J0796491R	RMC73M-000R
L330	J2122956M	COIL LAL 100UH K
L331	J0796491R	RMC73M-000R
L333	L420187	BLM11A102S
L334	L420187	BLM11A102S
L335	J0195250R	RMC73S 000R
L336	J0796491R	RMC73M-000R
L337	J0796491R	RMC73M-000R
L338	J0796491R	RMC73M-000R
L340	J0796491R	RMC73M-000R
L341	J0796491R	RMC73M-000R
L348	J0796491R	RMC73M-000R
L349	J2123781R	FILTER COIL EL101K
L350	J2123781R	FILTER COIL EL101K
L351	J2123781R	FILTER COIL EL101K
L358	J0796491R	RMC73M-000R
L400	J2123781R	FILTER COIL EL101K
L419	L420187	BLM11A102S
L420	J2122943M	AXIAL COIL 10UH-J
L422	L420187	BLM11A102S
L423	J2122943M	AXIAL COIL 10UH-J
L443	L420187	BLM11A102S
L444	J2122943M	AXIAL COIL 10UH-J
L446	L420187	BLM11A102S
L447	J2122943M	AXIAL COIL 10UH-J
L451	J2122253M	AXIAL COIL 100uH K TAPE
L452	J2122253M	AXIAL COIL 100uH K TAPE
L453	J2122253M	AXIAL COIL 100uH K TAPE
L540	J2123781R	FILTER COIL EL101K
L553	J2123781R	FILTER COIL EL101K
L601	J2123462M	FERRITE BEADS TYPE B2.3UH
L602	L300002	RL8010-100J-UL-HUK-B06
L604	L300002	RL8010-100J-UL-HUK-B06
L700	JBH00039	HC-820KS1 (LHL10)
L701	J2123461M	FERRITE BEAD 0.8uH
L702	L380178	LIN COIL ISKRA
L704	J2123461M	FERRITE BEAD 0.8uH
L705	J2123462M	FERRITE BEADS TYPE B2.3UH
L751	L380117	BRIDGE COIL 5MH
L752	L380147	&BRIDGE COIL
L900	L210068	M/FILTER 97192 RIFA BEAB
L901	L210068	M/FILTER 97192 RIFA BEAB
L902	J2123462M	FERRITE BEADS TYPE B2.3UH
L903	J2123462M	FERRITE BEADS TYPE B2.3UH
L904	J2125579	CHOKE COIL 47UH
L905	J2123462M	FERRITE BEADS TYPE B2.3UH
L909	J2123462M	FERRITE BEADS TYPE B2.3UH
L911	L300005	RL8010-180J-UL-HUK-B06
L921	J2123462M	FERRITE BEADS TYPE B2.3UH
L931	J2123462M	FERRITE BEADS TYPE B2.3UH
L932	J2123462M	FERRITE BEADS TYPE B2.3UH
L935	J2123462M	FERRITE BEADS TYPE B2.3UH
L939	J2123462M	FERRITE BEADS TYPE B2.3UH
L955	J2123462M	FERRITE BEADS TYPE B2.3UH
L957	J2123462M	FERRITE BEADS TYPE B2.3UH
L961	L380184	BUCK COIL E20/10/5
L965	J2123462M	FERRITE BEADS TYPE B2.3UH
L992	J2123462M	FERRITE BEADS TYPE B2.3UH
LA01	JBH00034	HC-330K SI LH10TK
LA02	L380176	33UH PANASONIC ELC12E330
LA03	JBH00034	HC-330K SI LH10TK
LA04	L380176	33UH PANASONIC ELC12E330
LED2	T547049	SLR-325VC LED RED
LS201	J2122956M	COIL LAL 100UH K
LS42	J2123103M	LAL 02 AXIAL COIL 10uH
LS60	J2123103M	LAL 02 AXIAL COIL 10uH
P10	J2902261	PLG-02P2R5VPWB
P1015	J2902263	PLG-04P2R5VPWB
P302	J2902261	PLG-02P2R5VPWB
P303	J2902261	PLG-02P2R5VPWB
P701	J2661753	4 PIN PLUG WITH BASE
P802	J2902267	PLG-08P2R5V PWB
P803	J2902264	PLG-05P 2R5V PWB
P9	J2902261	PLG-02P2R5VPWB
P900	E825259	2 WAY MAIN HEADER UL BEAB
P902	J2661751	2P PIN PLUG & BASE
PA04	J2902263	PLG-04P2R5VPWB
PHONO2	E826951	STEREO PHONO SOCKET
Q002	T633153	2N7002 MOSFET
Q003	J2325691R	TRS 2SC2412K T146Q/R
Q004	J2325691R	TRS 2SC2412K T146Q/R
Q005	T633153	2N7002 MOSFET
Q006	J2325691R	TRS 2SC2412K T146Q/R
Q007	J2325691R	TRS 2SC2412K T146Q/R
Q008	J2325691R	TRS 2SC2412K T146Q/R
Q011	J2325691R	TRS 2SC2412K T146Q/R
Q200	J2325691R	TRS 2SC2412K T146Q/R
Q212	T631302	& DTC114YKAT146
Q213	T631302	& DTC114YKAT146
Q214	T631302	& DTC114YKAT146
Q215	T631302	& DTC114YKAT146
Q216	J2328161R	TRS 2SC4265JC02TR
Q217	J2325691R	TRS 2SC2412K T146Q/R
Q330	J2325781R	TRS 2SA1037K T146Q/R
Q332A	J2325781R	TRS 2SA1037K T146Q/R
Q400	J2325691R	TRS 2SC2412K T146Q/R
Q401	J2325691R	TRS 2SC2412K T146Q/R
Q402	J2325691R	TRS 2SC2412K T146Q/R
Q403	J2325691R	TRS 2SC2412K T146Q/R
Q412	J2325781R	TRS 2SA1037K T146Q/R
Q413	J2316691R	STC-DTC144EK T146
Q501	J2325781R	TRS 2SA1037K T146Q/R
Q505	J2325781R	TRS 2SA1037K T146Q/R
Q507	J2325691R	TRS 2SC2412K T146Q/R
Q508	J2325691R	TRS 2SC2412K T146Q/R

A529280 PARTS LIST

Q509	J2325781R	TRS 2SA1037K T146Q/R
Q605	J2325691R	TRS 2SC2412K T146Q/R
Q606	J2325781R	TRS 2SA1037K T146Q/R
Q631	T636077	&IRFS530A ISOL SAMSUNG
Q631A	G884023	SPRING CLIP
Q701	T633137	TRANS BF459 MULLARD/SES
Q702	T732016	P0109DA THYRISTOR SGS
Q711	J2325781R	TRS 2SA1037K T146Q/R
Q751	J2315451	TRS-BU2508AF
Q751A	G884020	SPRING CLIP 56379-MULLARD
Q777	J2315891R	TRS JC548B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235418	POWER HEATSINK(TERNEX)
Q903B	G884020	SPRING CLIP 56379-MULLARD
Q904	T636077	&IRFS530A ISOL SAMSUNG
Q911	T636077	&IRFS530A ISOL SAMSUNG
Q912	T631309	TRANS BC557B BANDED
Q913	T633133	TRANS BF422 BAND MULL/AEG
Q919	J2315921R	TRS JC558B
Q922	J2315891R	TRS JC548B
Q923	T900796	&TL431CZ-AP SGS
Q927	T636094	MOSFET IRF640
Q927A	H224085	F9-4-220D-2LS
Q929	W024001	0.56ML SFT TIN'D COP WIRE
Q932	T633133	TRANS BF422 BAND MULL/AEG
Q951	J2315891R	TRS JC548B
Q964	T900473	SHUNT REG TL431CLP MOT/TEX
QA01	J2325691R	TRS 2SC2412K T146Q/R
QS40	J2325691R	TRS 2SC2412K T146Q/R
QS44	J2325781R	TRS 2SA1037K T146Q/R
QS60	J2325691R	TRS 2SC2412K T146Q/R
QS61	J2325781R	TRS 2SA1037K T146Q/R
R001	J0196093R	RMC73M-1F103JR
R002	J0196043R	RMC73M-1F101JR
R004	J0196093R	RMC73M-1F103JR
R005	J0196043R	RMC73M-1F101JR
R006	J0195883R	RMC73S 2A221JR
R007	J0195001R	RMC73 2B101JR
R008	J0196093R	RMC73M-1F103JR
R009	J0196093R	RMC73M-1F103JR
R010	J0196093R	RMC73M-1F103JR
R011	J0196093R	RMC73M-1F103JR
R012	J0196093R	RMC73M-1F103JR
R013	J0196043R	RMC73M-1F101JR
R014	J0196043R	RMC73M-1F101JR
R015	J0196043R	RMC73M-1F101JR
R016	J0196043R	RMC73M-1F101JR
R017	J0196093R	RMC73M-1F103JR
R018	J0196093R	RMC73M-1F103JR
R019	J0196086R	RMC73M-1F562JR
R020	J0196093R	RMC73M-1F103JR
R021	J0196068R	RMC73M-1F102JR
R022	J0196068R	RMC73M-1F102JR
R023	J0196068R	RMC73M-1F102JR
R024	J0195927R	RMC73S 2A123JR
R025	J0196095R	RMC73M - 1F123JR
R026	J0195032R	RMC73--2B393JR 1%
R027	J0196095R	RMC73M - 1F123JR
R028	J0195927R	RMC73S 2A123JR
R029	J0195933R	RMC73S 2A223JR
R030	J0195939R	RMC73S2A393JR
R031	J0195933R	RMC73S 2A223JR
R032	J0700054M	10K 1/16W C/FILM 5%
R033	J0196093R	RMC73M-1F103JR
R036	J0700054M	10K 1/16W C/FILM 5%
R037	J0195025R	RMC73 - 2B103JR
R038	J0196093R	RMC73M-1F103JR
R039	J0700049M	4K7 1/16W C/FILM 5%
R040	J0700041M	1K 1/16W C/FILM 5%
R041	J0700041M	1K 1/16W C/FILM 5%
R042	J0195875R	RMC73S 2A101JR
R043	J0700027M	100R 1/16W C/FILM 5%
R044	J0700027M	100R 1/16W C/FILM 5%
R045	J0196043R	RMC73M-1F101JR
R046	J0700027M	100R 1/16W C/FILM 5%
R047	J0196051R	RMC73M-1F221JR
R048U	J0700027M	100R 1/16W C/FILM 5%
R052	J0195875R	RMC73S 2A101JR
R053	J0196043R	RMC73M-1F101JR
R054	J0195013R	RMC73 2B102JR
R055	J0195013R	RMC73 2B102JR
R056	J0195013R	RMC73 2B102JR
R057	J0196093R	RMC73M-1F103JR
R058	J0196093R	RMC73M-1F103JR
R059	J0196093R	RMC73M-1F103JR
R060	J0196093R	RMC73M-1F103JR
R061	J0196093R	RMC73M-1F103JR
R062	J0196093R	RMC73M-1F103JR
R063	J0196043R	RMC73M-1F101JR
R064	J0196093R	RMC73M-1F103JR
R065	J0196043R	RMC73M-1F101JR
R066	J0195894R	RMC73S2A621JR 620R
R067	J0196093R	RMC73M-1F103JR
R070	J0196093R	RMC73M-1F103JR
R071	J0196093R	RMC73M-1F103JR
R074	J0195925R	RMC73S 2A103JR
R075	J0195941R	RMC73S 2A473JR
R078	J0196093R	RMC73M-1F103JR
R079	J0196043R	RMC73M-1F101JR
R080	J0196043R	RMC73M-1F101JR
R081	J0196053R	RMC73M - 1F271JR
R082	J0196093R	RMC73M-1F103JR
R083	J0196043R	RMC73M-1F101JR
R084	J0196043R	RMC73M-1F101JR
R085	J0195875R	RMC73S 2A101JR
R090	J0700027M	100R 1/16W C/FILM 5%
R091	J0196043R	RMC73M-1F101JR
R092	J0196078R	RMC73M-1F272JR
R093	J0196043R	RMC73M-1F101JR
R094	J0196043R	RMC73M-1F101JR
R095	J0196043R	RMC73M-1F101JR
R096	J0196043R	RMC73M-1F101JR

A529280 PARTS LIST

R097	J0700027M	100R 1/16W C/FILM 5%
R098	R120330	100R 1/4W DRG NO
R099	J0196043R	RMC73M-1F101JR
R230	J0195918R	RMC73S 2A562JR
R257	J0700027M	100R 1/16W C/FILM 5%
R258	J0700027M	100R 1/16W C/FILM 5%
R259	J0195900R	RMC73S 2A102JR
R261	J0195250R	RMC73S 000R
R263	J0195885R	RMC73S 2A271JR
R264	J0195918R	RMC73S 2A562JR
R265	J0700038M	680R 1/16W C/FILM 5%
R266	J0196078R	RMC73M-1F272JR
R267	J0195018R	RMC73 2B272JR
R268	J0195910R	RMC73S-2A272JR
R269	J0195250R	RMC73S 000R
R270	J0195250R	RMC73S 000R
R271	J0195875R	RMC73S 2A101JR
R272	J0195920R	RMC73S 2A682JR
R273	J0196070R	RMC73M - 1F122JR
R274	J0196043R	RMC73M-1F101JR
R275	J0195893R	RMC73S 2A561JR
R276	J0195001R	RMC73 2B101JR
R277	J0195895R	RMC73S 2A681JR
R281	J0195885R	RMC73S 2A271JR
R282	J0195931R	RMC73S 2A183JR
R300	J0195943R	RMC73S-2A563JR
R303	J0195871R	RMC73S 2A750JR
R305	J0195871R	RMC73S 2A750JR
R306	J0195871R	RMC73S 2A750JR
R307	J0195875R	RMC73S 2A101JR
R309	J0195868R	RM73S 2A560JR 56R
R311	J0195871R	RMC73S 2A750JR
R314	J0195950R	RMC73S 2A104JR
R315	J0196093R	RMC73M-1F103JR
R317	J0195016R	RMC73--2B182JR 1K8 1206
R319	J0195001R	RMC73 2B101JR
R320	J0195871R	RMC73S 2A750JR
R321	J0196043R	RMC73M-1F101JR
R322	J0196043R	RMC73M-1F101JR
R323	J0195871R	RMC73S 2A750JR
R326	J0195871R	RMC73S 2A750JR
R330	J0195871R	RMC73S 2A750JR
R331	J0196043R	RMC73M-1F101JR
R332	J0195950R	RMC73S 2A104JR
R333	J0196043R	RMC73M-1F101JR
R334	J0195868R	RM73S 2A560JR 56R
R335	J0195871R	RMC73S 2A750JR
R336	J0196043R	RMC73M-1F101JR
R337	J0196043R	RMC73M-1F101JR
R338	J0195875R	RMC73S 2A101JR
R339	J0113722M	RDO5S2H750JB
R340	J0195875R	RMC73S 2A101JR
R342	J0195925R	RMC73S 2A103JR
R344	J0195906R	RMC73S--2A182JR
R346	J0700027M	100R 1/16W C/FILM 5%
R347	J0195001R	RMC73 2B101JR
R349	J0195875R	RMC73S 2A101JR
R350	J0195943R	RMC73S-2A563JR
R351	J0195895R	RMC73S 2A681JR
R352	J0196111R	RMC73M - 1F563JR
R353	J0195871R	RMC73S 2A750JR
R355	J0195871R	RMC73S 2A750JR
R356	J0195871R	RMC73S 2A750JR
R357	J0196093R	RMC73M-1F103JR
R358	J0195906R	RMC73S--2A182JR
R359	J0195871R	RMC73S 2A750JR
R360	J0196093R	RMC73M-1F103JR
R361	J0196093R	RMC73M-1F103JR
R389	J0196103R	RMC73M - 1F273JR
R390	J0195895R	RMC73S 2A681JR
R400	J0195900R	RMC73S 2A102JR
R401	J0195950R	RMC73S 2A104JR
R402	J0195945R	RMC73S 2A683JR
R403	J0195875R	RMC73S 2A101JR
R404	J0195943R	RMC73S-2A563JR
R405	J0195943R	RMC73S-2A563JR
R406	J0196059R	RMC73M-1F471JR
R407	J0195875R	RMC73S 2A101JR
R408	J0196068R	RMC73M-1F102JR
R409	J0113725M	100R RES CARBON FILM 1/2W
R410	J0196072R	RMC73M-1F152JR
R411	J0195900R	RMC73S 2A102JR
R412	J0196113R	RMC73M - 1F683JR
R413	J0196059R	RMC73M-1F471JR
R414	J0196043R	RMC73M-1F101JR
R415	J0196059R	RMC73M-1F471JR
R416	J0196043R	RMC73M-1F101JR
R417	J0195037R	RMC73 2B104JR
R419	J0195950R	RMC73S 2A104JR
R423	J0195950R	RMC73S 2A104JR
R424	J0195891R	RMC73S 2A471JR
R433	J0195875R	RMC73S 2A101JR
R434	J0195875R	RMC73S 2A101JR
R435	J0196066R	RMC73M - 1F911JR
R436	J0796491R	RMC73M-000R
R437	J0796491R	RMC73M-000R
R438	J0196060R	RMC73M-1F511JR 510R
R439	J0196060R	RMC73M-1F511JR 510R
R440	J0196066R	RMC73M - 1F911JR
R441	J0196084R	RMC73M-1F472JR
R442	J0700034M	330R 1/16W C/FILM 5%
R446	J0195950R	RMC73S 2A104JR
R447	J0195891R	RMC73S 2A471JR
R448	J0196043R	RMC73M-1F101JR
R454	J0195950R	RMC73S 2A104JR
R465	J0196093R	RMC73M-1F103JR
R467	J0196093R	RMC73M-1F103JR
R469	J0195875R	RMC73S 2A101JR
R470	J0195875R	RMC73S 2A101JR
R471	J0700027M	100R 1/16W C/FILM 5%
R474	J0196043R	RMC73M-1F101JR
R475	J0196043R	RMC73M-1F101JR

A529280 PARTS LIST

R477	J0700027M	100R 1/16W C/FILM 5%
R478	J0700027M	100R 1/16W C/FILM 5%
R479	J0700027M	100R 1/16W C/FILM 5%
R480	J0700027M	100R 1/16W C/FILM 5%
R481	J0700027M	100R 1/16W C/FILM 5%
R482	J0700027M	100R 1/16W C/FILM 5%
R483	J0195875R	RMC73S 2A101JR
R484	J0195875R	RMC73S 2A101JR
R485	J0700027M	100R 1/16W C/FILM 5%
R486	J0195925R	RMC73S 2A103JR
R487	J0700027M	100R 1/16W C/FILM 5%
R488	J0195925R	RMC73S 2A103JR
R489	J0700027M	100R 1/16W C/FILM 5%
R490	J0700027M	100R 1/16W C/FILM 5%
R491	J0195925R	RMC73S 2A103JR
R492	J0195925R	RMC73S 2A103JR
R493	J0196068R	RMC73M-1F102JR
R494	J0196068R	RMC73M-1F102JR
R496	J0196088R	RMC73M-1F682JR
R497	J0196105R	RMC73M-1F333JR
R498	J0196043R	RMC73M-1F101JR
R499	J0196051R	RMC73M-1F221JR
R500	J0195929R	RMC73S 2A153JR
R501	J0195025R	RMC73 - 2B103JR
R502	J0196090R	RMC73M-1F822JR 8K2 0603
R504	J0196088R	RMC73M-1F682JR
R509	J0195939R	RMC73S2A393JR
R532	J0195875R	RMC73S 2A101JR
R533	J0195900R	RMC73S 2A102JR
R534	J0195875R	RMC73S 2A101JR
R535	J0195875R	RMC73S 2A101JR
R536	J0195875R	RMC73S 2A101JR
R537	J0195875R	RMC73S 2A101JR
R538	J0700027M	100R 1/16W C/FILM 5%
R539	J0700027M	100R 1/16W C/FILM 5%
R540	J0195875R	RMC73S 2A101JR
R541	J0195248R	RMC73--000R
R542	J0700027M	100R 1/16W C/FILM 5%
R543	J0700027M	100R 1/16W C/FILM 5%
R544	J0195887R	RMC73S 2A331JR
R545	J0195875R	RMC73S 2A101JR
R546	J0196043R	RMC73M-1F101JR
R547	J0196043R	RMC73M-1F101JR
R548	J0195007R	RMC73--2B331JR
R549	J0195879R	RMC73S 2A151JR
R550	J0196049R	RMC73M-1F181JR 180R 0603
R560	J0195001R	RMC73 2B101JR
R571	J0196068R	RMC73M-1F102JR
R586	J0195891R	RMC73S 2A471JR
R589	J0195910R	RMC73S-2A272JR
R600	J0196093R	RMC73M-1F103JR
R602	J0113684M	RNL-2R2J1-02LT
R603	J0113684M	RNL-2R2J1-02LT
R605	J0700075M	390K 1/16W C/FILM 5%
R606	J0195941R	RMC73S 2A473JR
R607	J0196043R	RMC73M-1F101JR
R608	J0195875R	RMC73S 2A101JR
R610	R232330	2K2 1/4W DRG NO
R611	R326330	360R 1/4W DRG NO
R612	R217330	27R 1/4W DRG NO
R613	R658330	680K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R616	J0196068R	RMC73M-1F102JR
R634	R232330	2K2 1/4W DRG NO
R635	R232330	2K2 1/4W DRG NO
R636	J0700051M	5K6 1/16W C/FILM 5%
R637	R120330	100R 1/4W DRG NO
R638	J0700049M	4K7 1/16W C/FILM 5%
R639	J0700049M	4K7 1/16W C/FILM 5%
R666	J0196068R	RMC73M-1F102JR
R667	J0700049M	4K7 1/16W C/FILM 5%
R702	R333330	3K3 1/4W DRG NO
R704	R648330	68K 1/4W DRG NO
R705	J0140931S	RSL-332J7WS(BSR-Z)
R706	R437571	4K7 2W 5% M02SL
R707	R135330	1K5 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R710	R217571	27R 2W 5% MO2SL
R710A	R217571	27R 2W 5% MO2SL
R711	R217571	27R 2W 5% MO2SL
R711A	R217571	27R 2W 5% MO2SL
R712	J0195925R	RMC73S 2A103JR
R713	J0100069M	RES FLM 1/8W 1.5K
R714	J0113748M	RD14S2H821JB
R715	J0110163S	RS08B3A562JS
R716	J0700054M	10K 1/16W C/FILM 5%
R717	J0700072M	220K 1/16W C/FILM 5%
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119649M	RN14S2B563FB(KOA)
R720	J0140933S	RSL-472J7WS(BSR-Z)
R724	J0110273S	RSO8B3D153JS
R725	R232570	2K2 1W 5% MO1SL
R731	R217571	27R 2W 5% MO2SL
R731A	R217571	27R 2W 5% MO2SL
R732	R217571	27R 2W 5% MO2SL
R732A	R217571	27R 2W 5% MO2SL
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R531330	5K1 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R738	R232330	2K2 1/4W DRG NO
R740	R457330	470K 1/4W DRG NO
R742	J0113735M	RD14S2H271JB
R745	R437330	4K7 1/4W DRG NO
R746	R120571	100R 2W 5% M02SL
R749	R242330	22K 1/4W DRG NO
R752	J0700074M	330K 1/16W C/FILM 5%
R757	J0700063M	47K 1/16W C/FILM 5%
R759	R536330	5K6 1/4W DRG NO
R764	R150330	100K 1/4W DRG NO
R765	J0700027M	100R 1/16W C/FILM 5%
R767	J0195875R	RMC73S 2A101JR
R768	J0196093R	RMC73M-1F103JR

A529280 PARTS LIST

R769	J0195902R	RMC73S 2A122JR
R770	R140730	10K 2% 1/4W MFR4
R776	J0700073M	270K 1/16W C/FILM 5%
R778	J0700056M	15K 1/16W C/FILM 5%
R779	R120571	100R 2W 5% M02SL
R780	R232330	2K2 1/4W DRG NO
R901	R242571	22K 2W M02S
R902	R546330	56K 1/4W DRG NO
R903	R222330	220R 1/4W DRG NO
R905	R150330	100K 1/4W DRG NO
R906	R130330	1K 1/4W DRG NO
R908	R130330	1K 1/4W DRG NO
R909	J0147642	RW99J3Y220JM 22R 7W
R911	R132725	1K2 MRS16T 1% M/F 1/16W
R912	R842736	82K 1% MF MFR4
R913	R447330	47K 1/4W DRG NO
R915	R658725	680K MRS16T 1% M/F
R916	J0700049M	4K7 1/16W C/FILM 5%
R917	R658725	680K MRS16T 1% M/F
R920	R140330	10K 1/4W DRG NO
R921	R546736	56K MFR4 1% 1/4W
R922	R247725	27K MRS16T1% M/FILM
R927	J0110281S	RS08B3D333JS
R932	R120330	100R 1/4W DRG NO
R933	J0700049M	4K7 1/16W C/FILM 5%
R941	R536330	5K6 1/4W DRG NO
R942	R521330	510R 1/4W DRG NO
R943	R120330	100R 1/4W DRG NO
R944	R244725	24K MRS16T 1% 1/16W
R945	R140725	10K MRS16T 1% M/FILM
R946	J0147544	RW99J3H150JM 15R 5W
R950	R433725	4K3 MRS16T 1/16W 1%
R951	R110731	10R 1/2W M/F MFR5 2%
R952	J0700058M	22K 1/16W C/FILM 5%
R953	J0700049M	4K7 1/16W C/FILM 5%
R954	J0700049M	4K7 1/16W C/FILM 5%
R956	R000618	0.5R 2W WIRE WOUND 5%
R957	R323330	330R 1/4W DRG NO
R958	R842736	82K 1% MF MFR4
R959	R556725	560K MRS16T 1% M/FILM
R960	R133725	1K3 MRS16T 1% M/FILM
R961	J0700052M	6K8 1/16W C/FILM 5%
R962	R130330	1K 1/4W DRG NO
R963	J0700041M	1K 1/16W C/FILM 5%
R966	R130330	1K 1/4W DRG NO
R967	J0700072M	220K 1/16W C/FILM 5%
R968	R000618	0.5R 2W WIRE WOUND 5%
R969	R242330	22K 1/4W DRG NO
R970	R120330	100R 1/4W DRG NO
R971	J0144050	ERF5ZK122 1K2 KOA RES 5W
R972	R150744	&100K 3W PRO3 M/F LANCET
R975	J0700041M	1K 1/16W C/FILM 5%
R976	R323330	330R 1/4W DRG NO
R977	R120330	100R 1/4W DRG NO
R978	R427330	470R 1/4W DRG NO
R980	R100551	1R 1/4W FR8225(TDK)-BEAB-
R981	J0700064M	56K 1/16W C/FILM 5%
R982	R319330	39R 1/4W DRG NO
R985	J0187072M	2K0 1/16W PHILIPS
R986	R150330	100K 1/4W DRG NO
R987	R319330	39R 1/4W DRG NO
R988	J0700067M	100K 1/16W C/FILM 5%
R989	E441045	PTC TYPE 2322-662-96624
R990	R316330	36R 1/4W
R991	R353714	330K 1/2W METAL FLM-BEAB
R992	J0700058M	22K 1/16W C/FILM 5%
R993	J0700056M	15K 1/16W C/FILM 5%
R994	R323330	330R 1/4W DRG NO
R996	R427330	470R 1/4W DRG NO
R997	J0187092M	RD14S1J133JB
R998	R323571	330R 2W 5% MO2S F
R999	R170727	10M 1W VR68 UL BEAB
RA01	J0700027M	100R 1/16W C/FILM 5%
RA02	J0196093R	RMC73M-1F103JR
RA03	J0700047M	3K3 1/16W C/FILM 5%
RA04	J0700055M	12K 1/16W C/FILM 5%
RA05	R120330	100R 1/4W DRG NO
RA06	J0196101R	RMC73M-1F223JR 1608
RA07	J0196111R	RMC73M - 1F563JR
RA08	J0196113R	RMC73M - 1F683JR
RA09	J0196101R	RMC73M-1F223JR 1608
RA10	J0196111R	RMC73M - 1F563JR
RA11	J0196084R	RMC73M-1F472JR
RA12	J0196113R	RMC73M - 1F683JR
RA13	J0196093R	RMC73M-1F103JR
RA14	R120330	100R 1/4W DRG NO
RA15	J0196084R	RMC73M-1F472JR
RA16	J0196104R	RMC73M-1F303JR 30K 0603
RA17	J0195953R	RMC73S-2A134JR 130K
RA18	J0700012M	6R8 1/16W C/FILM 5%
RA19	J0195025R	RMC73 - 2B103JR
RA20	J0187086M	RD14S1J752JB
RA21	J0195025R	RMC73 - 2B103JR
RA22	J0187086M	RD14S1J752JB
RA23	J0196078R	RMC73M-1F272JR
RA24	J0700054M	10K 1/16W C/FILM 5%
RA25	J0196093R	RMC73M-1F103JR
RA26	J0195916R	RMC73S 2A472JR
RA27	R427748	470R 3W PRO3 5% TAPED
RA31	J0796491R	RMC73M-000R
RA32	J0196078R	RMC73M-1F272JR
RA33	J0195945R	RMC73S 2A683JR
RA34	J0195945R	RMC73S 2A683JR
RA35	J0195910R	RMC73S-2A272JR
RA36	J0196045R	RMC73M-1F121JR 120R 1608
RA37	J0196045R	RMC73M-1F121JR 120R 1608
RA38	J0196118R	RMC73M-1F104JR 100K
RA39	J0196030R	RMC73M-1F330JR 33R
RA40	J0196118R	RMC73M-1F104JR 100K
RA41	J0196030R	RMC73M-1F330JR 33R
RA45	J0113725M	100R RES CARBON FILM 1/2W
RM01	J0196043R	RMC73M-1F101JR

A529280 PARTS LIST

RM02	J0196043R	RMC73M-1F101JR
RM05	J0195001R	RMC73 2B101JR
RM06	J0196043R	RMC73M-1F101JR
RM07	J0700027M	100R 1/16W C/FILM 5%
RM08	J0196043R	RMC73M-1F101JR
RM09	J0196043R	RMC73M-1F101JR
RM10	J0196043R	RMC73M-1F101JR
RM13	J0196093R	RMC73M-1F103JR
RM14	J0196093R	RMC73M-1F103JR
RM15	J0195025R	RMC73 - 2B103JR
RM16	J0195025R	RMC73 - 2B103JR
RM17	J0196093R	RMC73M-1F103JR
RM51	J0700054M	10K 1/16W C/FILM 5%
RS40	J0700049M	4K7 1/16W C/FILM 5%
RS41	J0195900R	RMC73S 2A102JR
RS46	J0196118R	RMC73M-1F104JR 100K
RS47	J0196068R	RMC73M-1F102JR
RS49	J0700041M	1K 1/16W C/FILM 5%
RS60	J0196118R	RMC73M-1F104JR 100K
RS61	J0196084R	RMC73M-1F472JR
RS62	J0700041M	1K 1/16W C/FILM 5%
RS64	J0195900R	RMC73S 2A102JR
RS65	J0195900R	RMC73S 2A102JR
S001	E139506	5 WAY TACT SWITCH
SCART1	E826946	A20 DOUBLE SCART
SCART2	E826945	SINGLE SCART METAL
SHROUD	X321241	&ACTUATOR SHROUD
SW900	J2634732	SWITCH SDD-FC BEAB
T700	JBW01041	FBT HFL1532G BEABT
T702	J2260291U	H DRIVE TRANSFORMER TAW
T900	L380172	SW MODE EE4215 OREGA BEAB
T902	L380181	SW MODE XXXX CT286D8 BEAB
VR904	E311108	500R POT HORIZONTAL TAPE
VR964	J0160211R	EVND8AA03B13-TAPE(PANA)
W002	EC5A100A	7/0.2MM S000030
W003	EC5A060A	7/0.2MM S000030
W005	EC530603	7/0.2MM S000010
W008	EC5A120A	7/0.2 S000030
W009	EC5A060A	7/0.2MM S000030
W010	EC530903	7/0.2MM S000029
W018	EC530203	7/0.2MM S000010
W019	EC530603	7/0.2MM S000010
W020	EC530303	7/0.2MM S000010
W021	EC5A120A	7/0.2 S000030
W022	EC530903	7/0.2MM S000029
W023	EC530203	7/0.2MM S000010
W024	EC5A110A	7/0.2MM S000030
X001	E516081F	CRYSTAL 6MHZ
X200	E518054	K9453M
X219	E518053	K3953M
X305	L420187	BLM11A102S
X412	E516070	X'TAL 18.432MHZ
X513	E516030F	12MHz X'TAL NDK 5MM LEG
Z005	T536219	BZX79B3V3~PHILIPS~
Z006	T536312	PDZ-B 3.6B 2% SMT ZENER
Z007	T536279	BZX284-C5V6 5% S MOUNT
Z008	T536279	BZX284-C5V6 5% S MOUNT
Z014	T536312	PDZ-B 3.6B 2% SMT ZENER
Z205	T536215	BZX 79C 33V~PHILIPS~
Z404	T536181	BZX79C 13V~PHILIPS~
Z501	T536184	BZX79C 9V1~PHILIPS~
Z502	T536184	BZX79C 9V1~PHILIPS~
Z503	T536184	BZX79C 9V1~PHILIPS~
Z504	T536184	BZX79C 9V1~PHILIPS~
Z505	T536284	BZX284-C9V1
Z506	T536284	BZX284-C9V1
Z507	T536277	BZX284-C 4V7 5%
Z600	T536178	BZX79C 3V3~PHILIPS~
Z601	T536178	BZX79C 3V3~PHILIPS~
Z603A	T536173	BZX79C18V~PHILIPS~
Z603B	T536215	BZX 79C 33V~PHILIPS~
Z604	T536259	BZX79C56V
Z607	T536284	BZX284-C9V1
Z608	T536284	BZX284-C9V1
Z610	T536173	BZX79C18V~PHILIPS~
Z615	T536172	BZX79C27V~PHILIPS~
Z616	T536280	BZX284-C6V2
Z703	T536235	BZX79B18V~PHILIPS~
Z713	J2339251M	HZS36-ILT
Z741	T536259	BZX79C56V
Z744	T536227	BZX79B7V5~PHILIPS~
Z900	T536266	BZV85-C27V
Z927	T536173	BZX79C18V~PHILIPS~
Z942	T536179	BZX79C 6V2~PHILIPS~
Z964	T536236	BZX79B22V~PHILIPS~
Z990	T536173	BZX79C18V~PHILIPS~
Z991	T536173	BZX79C18V~PHILIPS~
Z992	T536173	BZX79C18V~PHILIPS~
ZA01	T536279	BZX284-C5V6 5% S MOUNT
ZA08	T536268	BZV85-C22V
ZA10	T536172	BZX79C27V~PHILIPS~
ZR048A	W470200	1MM 1/D SLEEVING BLACK
ZR048B	W470200	1MM 1/D SLEEVING BLACK
ZS42	T536271	BZX284-C2V7
ZS60	T536271	BZX284-C2V7
ZZA08	W470200	1MM 1/D SLEEVING BLACK

A529290 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
#15	E573018	FERRITE CLAMP CORE	C310	J0893031R	CKM 102K500B CNT2125
#200	J3731082	PURSE LOCK	C312	J0893179R	CKM-104K160B-CNT1608
#27	L350016	FERRITE CORE	C313	J0893027R	CKM-104K250B-CNT2125
#270	J2123462M	FERRITE BEADS TYPE B2.3UH	C318	J0893027R	CKM-104K250B-CNT2125
#40	E573018	FERRITE CLAMP CORE	C324	J0893179R	CKM-104K160B-CNT1608
#4069	J3731082	PURSE LOCK	C325	J0893179R	CKM-104K160B-CNT1608
#500	E573018	FERRITE CLAMP CORE	C326	J0893179R	CKM-104K160B-CNT1608
#5000	N937052	CHASSIS FRAME	C327	J0880194R	0.1UF 50V +-5% (100N)
#5071	G291311	3X12 BT SCREW (BLACK)	C328	J0893027R	CKM-104K250B-CNT2125
#5072	G291311	3X12 BT SCREW (BLACK)	C329	J0893027R	CKM-104K250B-CNT2125
#5073	G291311	3X12 BT SCREW (BLACK)	C331	J0800326R	CEL-101M160WMFT
#5075	N332067	SPACER	C332	J0800317R	CP ELECTRO 47UF SMG 16
#67	J3731082	PURSE LOCK	C345	J0227219R	CK73B1H104KR 100N 1206
#68	J3731082	PURSE LOCK	C369	J0800326R	CEL-101M160WMFT
#802	G864006	CABLE TIE T18R	C370	J0893027R	CKM-104K250B-CNT2125
#E802	JBM00041	FERRITE CORES BP53RB	C371	J0800326R	CEL-101M160WMFT
AV300	JEU00581	PHONO-S/VHS CONNECTOR	C372	J0893027R	CKM-104K250B-CNT2125
B001	PC55002	A20 MAIN PCB BEAB	C373	J0800326R	CEL-101M160WMFT
C001	J0893179R	CKM-104K160B-CNT1608	C374	J0227219R	CK73B1H104KR 100N 1206
C002	J0893027R	CKM-104K250B-CNT2125	C401	J0893208R	CKM-102K500B-CNT1608
C003	J0800271R	ELECT CAP 0.1UF 50V SMG	C403	J0893126R	CCM-101J500CHCNT1608
C004	J0800282R	CAP ELECTRO 2.2UF-M 50V	C404	J0800294R	ELECT CAP 10UF 50V SMG
C005	J0800291R	CAP ELEC 10uF 16V SMG	C405	J0893031R	CKM 102K500B CNT2125
C007	J0800282R	CAP ELECTRO 2.2UF-M 50V	C406	J0228054R	CC73SCH1H101JR
C008	J0800291R	CAP ELEC 10uF 16V SMG	C407	J0800294R	ELECT CAP 10UF 50V SMG
C009	J0800291R	CAP ELEC 10uF 16V SMG	C408	J0893031R	CKM 102K500B CNT2125
C010	J0893179R	CKM-104K160B-CNT1608	C410	J0227009R	CK73B1H102KR 1N 1206
C011	J0893179R	CKM-104K160B-CNT1608	C411	J0228054R	CC73SCH1H101JR
C012	J0893027R	CKM-104K250B-CNT2125	C412	J0893031R	CKM 102K500B CNT2125
C013	J0227219R	CK73B1H104KR 100N 1206	C413	J0228054R	CC73SCH1H101JR
C014	J0800317R	CP ELECTRO 47UF SMG 16	C414	J0800294R	ELECT CAP 10UF 50V SMG
C015	J0893179R	CKM-104K160B-CNT1608	C415	J0893031R	CKM 102K500B CNT2125
C016	J0228042R	CC73SCH1H330JR	C416	J0800294R	ELECT CAP 10UF 50V SMG
C017	J0228042R	CC73SCH1H330JR	C417	J0893208R	CKM-102K500B-CNT1608
C019	J0893222R	CKM-103K500B-CNT1608	C420	J0800291R	CAP ELEC 10uF 16V SMG
C020	J0800271R	ELECT CAP 0.1UF 50V SMG	C422	J0893031R	CKM 102K500B CNT2125
C202	J0800364F	CAP ELECT 1000UF 50V SMG	C423	J0893027R	CKM-104K250B-CNT2125
C203	J0800361F	CAP ELEC 1000UF-M SMG 16V	C424	J0800291R	CAP ELEC 10uF 16V SMG
C204	J0227219R	CK73B1H104KR 100N 1206	C425	J0893027R	CKM-104K250B-CNT2125
C205	J0800317R	CP ELECTRO 47UF SMG 16	C429	J0893208R	CKM-102K500B-CNT1608
C206	J0893044R	CKM 103K500B CNT2125	C430	J0893208R	CKM-102K500B-CNT1608
C208	J0800291R	CAP ELEC 10uF 16V SMG	C431	J0227449R	CK73B1E334ZR 330N 25V
C209	J0893044R	CKM 103K500B CNT2125	C432	J0227449R	CK73B1E334ZR 330N 25V
C210	J0893222R	CKM-103K500B-CNT1608	C433	J0227449R	CK73B1E334ZR 330N 25V
C211	J0893123R	CC73MCH1H560JR	C434	J0227449R	CK73B1E334ZR 330N 25V
C212	J0893113R	CC73MCH1H100C	C435	J0800291R	CAP ELEC 10uF 16V SMG
C213	J0893044R	CKM 103K500B CNT2125	C436	J0800294R	ELECT CAP 10UF 50V SMG
C215	J0893222R	CKM-103K500B-CNT1608	C437	J0800291R	CAP ELEC 10uF 16V SMG
C220	J0893044R	CKM 103K500B CNT2125	C438	J0893179R	CKM-104K160B-CNT1608
C301	J0800352R	ELEC CAP 470UF 10V SMG	C439	C353883	GRM40Y5V334Z16PT
C302	J0227009R	CK73B1H102KR 1N 1206	C440	J0893027R	CKM-104K250B-CNT2125
C303	J0893027R	CKM-104K250B-CNT2125	C441	J0227449R	CK73B1E334ZR 330N 25V
C304	J0893027R	CKM-104K250B-CNT2125	C442	J0227449R	CK73B1E334ZR 330N 25V
C305	J0880194R	0.1UF 50V +-5% (100N)	C443	J0893248R	CKM-334Z160B-CNT1608
C309	J0800352R	ELEC CAP 470UF 10V SMG	C444	C353883	GRM40Y5V334Z16PT

A529290 PARTS LIST

I.D.	Part No.	Description
C445	C353883	GRM40Y5V334Z16PT
C446	C353883	GRM40Y5V334Z16PT
C447	C353883	GRM40Y5V334Z16PT
C448	C353883	GRM40Y5V334Z16PT
C449	J0893027R	CKM-104K250B-CNT2125
C450	J0800291R	CAP ELEC 10uF 16V SMG
C451	J0800294R	ELECT CAP 10UF 50V SMG
C452	J0893197R	CKM-223K250B-CNT1608
C454	J0893027R	CKM-104K250B-CNT2125
C455	J0893123R	CC73MCH1H560JR
C456	J0893123R	CC73MCH1H560JR
C457	J0893123R	CC73MCH1H560JR
C458	J0893126R	CCM-101J500CHCNT1608
C459	C608886	& GRM40COG6R8D50PT 6.8PF
C460	C608886	& GRM40COG6R8D50PT 6.8PF
C461	J0893123R	CC73MCH1H560JR
C462	J0893213R	CC73MCH1H222JR
C463	J0893179R	CKM-104K160B-CNT1608
C465	J0800294R	ELECT CAP 10UF 50V SMG
C466	J0800353R	CAP ELECTRO 470UF 16V
C467	J0800294R	ELECT CAP 10UF 50V SMG
C468	J0893031R	CKM 102K500B CNT2125
C470	J0893179R	CKM-104K160B-CNT1608
C471	J0800327R	ELECT CAP 100UF 25V SMG
C500	J0893039R	CKM 472K500B CNT 2125
C501	J0800279R	ELECT CAP 1.UF 50V
C502	J0195250R	RMC73S 000R
C503	J0893044R	CKM 103K500B CNT2125
C504	J0800279R	ELECT CAP 1.UF 50V
C506	J0890087R	CAP CERAMIC 1000pf-B 50V
C508	J0893222R	CKM-103K500B-CNT1608
C509	J0893222R	CKM-103K500B-CNT1608
C510	J0227436R	0.22U +/-10% 1206 SMT
C511	J0893206R	680PF +/-10% 0603 SMT
C518U	C150711	CAP 100N 36521104 100V POL
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
C572	J0228066R	GRM40CDG331J50PT
C575	J0893027R	CKM-104K250B-CNT2125
C576	J0893048R	CKM-223K500B-CNT2125
C577	J0893027R	CKM-104K250B-CNT2125
C578	J0893027R	CKM-104K250B-CNT2125
C579	J0893027R	CKM-104K250B-CNT2125
C581	J0880016R	POLY CAP FLM 0.1UF 50V
C582	J0893027R	CKM-104K250B-CNT2125
C583	J0195250R	RMC73S 000R
C585	J0800372F	CEL 332 M160WNL SMG 5MM
C586	J0893027R	CKM-104K250B-CNT2125
C588	J0893027R	CKM-104K250B-CNT2125
C589	J0893039R	CKM 472K500B CNT 2125
C590	J0195250R	RMC73S 000R
C591	J0195250R	RMC73S 000R
C592	J0195250R	RMC73S 000R
C593	J0800279R	ELECT CAP 1.UF 50V
C594	J0228038R	CC73SCH1H220JR
C595	J0228038R	CC73SCH1H220JR
C596	J0893027R	CKM-104K250B-CNT2125
C597	J0800372F	CEL 332 M160WNL SMG 5MM
C598	C457884	&GRM40X7R474K25PT 470N
C599	J0893035R	CKM--222K500B CNT2125
C602	J0800337R	CEL-221M350WMFT
C603	J0800329R	ELECT CAP 100UF 50V SMG
C604	J0880044R	CAP POLYESTER 0.01UF K50V
C605	C150711	CAP 100N 36521104 100V POL
C606	J0893027R	CKM-104K250B-CNT2125
C607	J0893027R	CKM-104K250B-CNT2125
C610	J0890092R	CAP CERAMIC 0.0022uF 50V
C616	J0800339F	CAP ELECT 220UF 63V
C617	J0227009R	CK73B1H102KR 1N 1206
C620	J0893027R	CKM-104K250B-CNT2125
C621	J0893208R	CKM-102K500B-CNT1608
C639	J0800292R	CAP ELECT 10UF 25V SMG
C644	J0890092R	CAP CERAMIC 0.0022uF 50V
C701	J0243507R	CK45B2H331KB
C702	J0257540F	ELEC CAP 4U7 250V
C703	C140760	10n 2KV R/EVOX PHE428
C704	JAJ00138F	CC-222K202R-DF 2N2 2KV
C705	J0299993F	CAP 18NF 5% 630V POLY
C706	J0890087R	CAP CERAMIC 1000pf-B 50V
C707	JAJ00134R	CK45-R3DD102K 1N 2KV
C708	J0244505R	CER CAP 2n2-K 500V
C709	J0253953R	CE04W2C2R2M
C710	J0253953R	CE04W2C2R2M
C711	C353764	&330N MKP379 44334
C712	C353764	&330N MKP379 44334
C713	C353764	&330N MKP379 44334
C714	C158764	180N MKP379 44184
C715	J0243512R	CK45B2H821KB
C716	C140707	CAP 10N 365-51103 MULARD
C719	J0257540F	ELEC CAP 4U7 250V
C720	J0880033R	CQM-152K500HFT
C724	JAJ00121R	CK45-R3DD101K 100PF 2KV
C726	J0800336R	CAP ELEC 220UF M SMG 25V
C727	J0243507R	CK45B2H331KB
C732	J0800291R	CAP ELEC 10uF 16V SMG
C735U	J0880044R	CAP POLYESTER 0.01UF K50V
C737	C160708	1UF +-10% 250V 368-45105
C740	J0244509R	CER CAP 4700PF-K 500V
C741	J0244509R	CER CAP 4700PF-K 500V
C742	J0800337R	CEL-221M350WMFT
C743	J0880053R	CQ93M1H473KEB(MF) N/PAN
C747	J0250511R	CAP POLY 0.022UF PHILIPS
C748	JAJ00134R	CK45-R3DD102K 1N 2KV
C749	J0880194R	0.1UF 50V +-5% (100N)
C764	J0800279R	ELECT CAP 1.UF 50V
C769	JAJ00134R	CK45-R3DD102K 1N 2KV
C770	J0800292R	CAP ELECT 10UF 25V SMG
C900	C150763	&100NF 20% X2 275V BEABT
C901	J0262774N	0.22UF 250VAC X2 ~BEABT
C902	J0262774N	0.22UF 250VAC X2 ~BEABT
C903	J0890083R	CK45 B1H471KB

A529290 PARTS LIST

I.D.	Part No.	Description
C904	C648763	&68NF 20% X2 275V BEABT
C905	C001561	ELECT CAP 100UF 250V
C908	J0800329R	ELECT CAP 100UF 50V SMG
C909	J0800352R	ELEC CAP 470UF 10V SMG
C910	J0880044R	CAP POLYESTER 0.01UF K50V
C911	J0800328R	CEL-101M350WMFT
C912	J0244505R	CER CAP 2n2-K 500V
C913	J0800327R	ELECT CAP 100UF 25V SMG
C914	C005046	ELECT 1000UF 25V LXY
C915	J0800354R	470UF 25V SMG
C916	C005046	ELECT 1000UF 25V LXY
C917	J0880048R	CQT223K50MB (PANASONIC)
C918	C001561	ELECT CAP 100UF 250V
C919	J0890078R	CK45B1H221KB (MURATA)
C920	C001561	ELECT CAP 100UF 250V
C921	C001561	ELECT CAP 100UF 250V
C922	J0880037R	CQM332K500HFT
C923	J0880037R	CQM332K500HFT
C924	J0800294R	ELECT CAP 10UF 50V SMG
C925	JAJ00121R	CK45-R3DD101K 100PF 2KV
C926	JAJ00127R	CK45-R3DD 331K
C927	JAJ00121R	CK45-R3DD101K 100PF 2KV
C929	J0800327R	ELECT CAP 100UF 25V SMG
C931	JAJ00138F	CC-222K202R-DF 2N2 2KV
C932	J0880037R	CQM332K500HFT
C933	J0253491F	ELEC CAP 100UF 200V
C936	J0880051R	CQ93M1H333KEB PANASONIC
C942	J0880042R	CQ93M1H682KEB(MF) N/PAN
C950	J0259431F	ELEC CAP 220UF 200V
C951	J0800362F	CAP ELECT 1000UF 25V SMG
C952	J0800362F	CAP ELECT 1000UF 25V SMG
C953	J0243509R	CERAMIC CAP 470p 500V
C954	J0243509R	CERAMIC CAP 470p 500V
C955	JAJ00129R	CK45-R3DD 471K
C957	J0243509R	CERAMIC CAP 470p 500V
C959	J0800353R	CAP ELECTRO 470UF 16V
C960	J0244501R	CER CAP 1000PF-K 500V
C961	J0244501R	CER CAP 1000PF-K 500V
C962	J0244501R	CER CAP 1000PF-K 500V
C963	J0244501R	CER CAP 1000PF-K 500V
C964	J0243511R	CER CAP 680PF-K 500V
C967	J0243509R	CERAMIC CAP 470p 500V
C970	J0800345R	ELECT CAP 330UF 25V SMG
C971	J0880044R	CAP POLYESTER 0.01UF K50V
C977	J0243509R	CERAMIC CAP 470p 500V
C986	J0800328R	CEL-101M350WMFT
C987	J0800352R	ELEC CAP 470UF 10V SMG
C990	J0880048R	CQT223K50MB (PANASONIC)
C991	E884110	SPARK GAP 10N 2KV SDUK 16
C992	J0880044R	CAP POLYESTER 0.01UF K50V
C993	C150891	100N 500V CAP
C994	J0800327R	ELECT CAP 100UF 25V SMG
C995	J0880037R	CQM332K500HFT
C997	J0880031R	CQ93M1H102KEB (MF) N/PAN
C999	C232753	2N2 4KVAC PME294 UL BEABT

I.D.	Part No.	Description
CA01U	J0880198R	POLY CAP 0.22UF-J 50V
CA02U	J0880198R	POLY CAP 0.22UF-J 50V
CA03	J0880198R	POLY CAP 0.22UF-J 50V
CA04	J0893031R	CKM 102K500B CNT2125
CA05	J0893031R	CKM 102K500B CNT2125
CA06	J0893118R	CCM-270J500CHCNT1608
CA07	C001550	4700UF 25V SMG S/LEG
CA08	J0893135R	CC73MCH1H471JR 1608
CA09	J0893179R	CKM-104K160B-CNT1608
CA10	J0893133R	CC73MCH1H331JR
CA11	J0893135R	CC73MCH1H471JR 1608
CA12	J0893135R	CC73MCH1H471JR 1608
CA13	J0284623R	CEL-1R0M500WMFT(BP)E
CA14	C001550	4700UF 25V SMG S/LEG
CA15	C343882	GRM40X7R333K50-550
CA16	J0880198R	POLY CAP 0.22UF-J 50V
CA17	J0893208R	CKM-102K500B-CNT1608
CA18	J0893208R	CKM-102K500B-CNT1608
CA20	J0893027R	CKM-104K250B-CNT2125
CA21	J0228070R	MINI CHIP 470PF-J CH 50V
CA22	J0893133R	CC73MCH1H331JR
CA24	J0893027R	CKM-104K250B-CNT2125
CA25	J0880064R	CQM - 334J500HFT
CA27	J0893031R	CKM 102K500B CNT2125
CA28	J0284623R	CEL-1R0M500WMFT(BP)E
CA29	C343882	GRM40X7R333K50-550
CA30	J0893208R	CKM-102K500B-CNT1608
CA31	J0800291R	CAP ELEC 10uF 16V SMG
CA32	J0893179R	CKM-104K160B-CNT1608
CA33	J0893179R	CKM-104K160B-CNT1608
CA34	J0893222R	CKM-103K500B-CNT1608
CA35	J0800316R	47u 10V ELECT CAP SMG
CA36	J0800316R	47u 10V ELECT CAP SMG
CA37	J0800325R	CEL-101M100WMFT
CA38	J0800325R	CEL-101M100WMFT
CA39	J0893219R	CCM-682K500B-CNT1608
CA40	J0893042R	CKM 682K500B CNT2125
CA41	J0800325R	CEL-101M100WMFT
CA42	J0284623R	CEL-1R0M500WMFT(BP)E
CA44	J0284623R	CEL-1R0M500WMFT(BP)E
CS20	J0800326R	CEL-101M160WMFT
CS40B	JAA00381R	10UF 6.3V SMT 3216
CS44	J0893126R	CCM-101J500CHCNT1608
CS45	J0893126R	CCM-101J500CHCNT1608
CS60B	JAA00381R	10UF 6.3V SMT 3216
CS62	J0893126R	CCM-101J500CHCNT1608
CS63	J0893126R	CCM-101J500CHCNT1608
CU01	J0800359R	CEL-102M100WMFT
D001	T531069	SHOTTKY 30V/200mA/BAT254
D002	T531067	DIODE BAS216 S/MOUNT
D003	T531067	DIODE BAS216 S/MOUNT
D004	T531069	SHOTTKY 30V/200mA/BAT254
D006	T531069	SHOTTKY 30V/200mA/BAT254
D007	T531069	SHOTTKY 30V/200mA/BAT254
D008	T531069	SHOTTKY 30V/200mA/BAT254

A529290 PARTS LIST

I.D.	Part No.	Description
D009	T531069	SHOTTKY 30V/200mA/BAT254
D011	J2343963M	MPG06J (TAPE) GI
D015	T531067	DIODE BAS216 S/MOUNT
D016	T531069	SHOTTKY 30V/200mA/BAT254
D017	T531069	SHOTTKY 30V/200mA/BAT254
D018	T531069	SHOTTKY 30V/200mA/BAT254
D206	T531067	DIODE BAS216 S/MOUNT
D208	T531067	DIODE BAS216 S/MOUNT
D209	T531067	DIODE BAS216 S/MOUNT
D301	T531068	DIODE MA723/TP PANASONIC
D501	T531067	DIODE BAS216 S/MOUNT
D502	T531056	DIODE BYV10-40 ~MULLARD
D503	T531056	DIODE BYV10-40 ~MULLARD
D507	T531067	DIODE BAS216 S/MOUNT
D508	J2348921M	DIODE 1N4531
D522	T531068	DIODE MA723/TP PANASONIC
D523	T531069	SHOTTKY 30V/200mA/BAT254
D601	J2348921M	DIODE 1N4531
D603	T531067	DIODE BAS216 S/MOUNT
D604	T431113	DIODE BYD33J MULL BEAB
D607	T531053	DIODE IN4148 MULL/PHIL/ITT
D608	T531053	DIODE IN4148 MULL/PHIL/ITT
D610	T431113	DIODE BYD33J MULL BEAB
D611	T431113	DIODE BYD33J MULL BEAB
D622	J2343962M	MPG06G
D645	T536259	BZX79C56V
D701	T431113	DIODE BYD33J MULL BEAB
D702	T431113	DIODE BYD33J MULL BEAB
D703	J2343941M	RGP10G
D706	T431117F	DIODE BY228 P/F PHILIPS
D707	T531086F	BYW96E
D708	J2336612	RU3AM
D711	T531086F	BYW96E
D713	T431113	DIODE BYD33J MULL BEAB
D714	T431113	DIODE BYD33J MULL BEAB
D715	J2348921M	DIODE 1N4531
D716	J2348921M	DIODE 1N4531
D735	T431113	DIODE BYD33J MULL BEAB
D739	J2348921M	DIODE 1N4531
D745	J2348921M	DIODE 1N4531
D904	J2348921M	DIODE 1N4531
D905	T431113	DIODE BYD33J MULL BEAB
D906	T431113	DIODE BYD33J MULL BEAB
D907	T531055	DIODE BAT85 SCHOTTKY MULL
D910	J2348921M	DIODE 1N4531
D911	J2348921M	DIODE 1N4531
D913	J2348921M	DIODE 1N4531
D914	J2348921M	DIODE 1N4531
D915	T431113	DIODE BYD33J MULL BEAB
D916	T431113	DIODE BYD33J MULL BEAB
D919	T531086F	BYW96E
D920	J2342711M	DIODE EM2A (SANKEN)
D921	J2342711M	DIODE EM2A (SANKEN)
D922	J2342711M	DIODE EM2A (SANKEN)
D923	J2342711M	DIODE EM2A (SANKEN)
D924	J2342711M	DIODE EM2A (SANKEN)
D925	T431122	DIODE BYV28-200~PHILIPS~
D927	J2348921M	DIODE 1N4531
D931	J2342711M	DIODE EM2A (SANKEN)
D933	T536259	BZX79C56V
D934	T431114	& BYD33M
D939	T431113	DIODE BYD33J MULL BEAB
D953	T431145	BYW29E-200
D953A	H224075	H/SINK F9-4-220 &TAG COL
D955	T431127	BYR29F-700
D955A	H235369	FI2-32-2LA-2 HEATSINK
D955B	G291023	M2.5x8 TAPTITE SCREW
D955C	G560333	M2.5 SPRING WASHER
D960	J2342711M	DIODE EM2A (SANKEN)
D961	J2342711M	DIODE EM2A (SANKEN)
D962	J2342711M	DIODE EM2A (SANKEN)
D963	J2342711M	DIODE EM2A (SANKEN)
D970	T431113	DIODE BYD33J MULL BEAB
D977	T431122	DIODE BYV28-200~PHILIPS~
D982	J2348921M	DIODE 1N4531
D984	T531053	DIODE IN4148 MULL/PHIL/ITT
D991	T431113	DIODE BYD33J MULL BEAB
D992	T431120	DIODE BYV27-150 ~MULLARD~
D994	T531055	DIODE BAT85 SCHOTTKY MULL
D995	T531053	DIODE IN4148 MULL/PHIL/ITT
D996	J2348921M	DIODE 1N4531
D997U	J2348921M	DIODE 1N4531
DA01	T531067	DIODE BAS216 S/MOUNT
DA02	J2348921M	DIODE 1N4531
DA03	T531067	DIODE BAS216 S/MOUNT
DS42	T531067	DIODE BAS216 S/MOUNT
DS60	T531067	DIODE BAS216 S/MOUNT
E002	E843366	OSD SHIELDED LEAD
E04	E843369	SPEAKER LEAD
E10	E846825	A5 SCREEN LD 2PIN EHUK
E1015	E843304	4 WAY LD 430mm(PS06/E413)
E206	E843314	CPT EARTH LEAD
E207	E843314	CPT EARTH LEAD
E208	E843286	GROUND LEAD FEMALE
E30	E846825	A5 SCREEN LD 2PIN EHUK
E500	E843376	OSD SHIELDED LEAD
E601	J2661752	3P PLUG PIN/BASE UL BEAB
E802	E843351	A20 8 WAY CRT BASE LEAD
E803	E846902	A7 CRT BASE LEAD 550mm
F501	J2142243	CERAMIC TRAP 5.5MHZ
F900	J2722446	FUS-4A T4AH 250V BEABT
F900A	J2721792	FUSE HOLDER UL/BEAB
F901	E882359	FUSE GLASS T2.0AL BEABT
F901A	J2721792	FUSE HOLDER UL/BEAB
HS01	E826160	H/P SKT HSJ3000-01-010
I001	T900956	LE33CZ TO92
I003	E730303	IC M8_IP
I003A	E823935	52WAY IC SKT ~ FELCO
I004	T900779	74HC595
I006	T900989	M24C16-W SMT

A529290 PARTS LIST

I.D.	Part No.	Description
I007	T900980	M62703ML
I302	T900762	IC 4053 SO16N
I303	T900762	IC 4053 SO16N
I304	T900762	IC 4053 SO16N
I401	T900936	MSP3410D C5
I403	T901002	BA10358
I501	T900959	TDA8879
I601	T900951	TDA8358J
I601A	H235475	HEATSINK A20
I601B	G884020	SPRING CLIP 56379-MULLARD
I900	T900452	UC3844 SGS/UNITRODE
I902	T900815	& UC3843N SGS
I903	T901000	L78M05CV 500MA REGULATOR
I903A	H224085	F9-4-220D-2LS
I904	T900345	REG 7805 SGS/MOTO/NEC
I904A	G884023	SPRING CLIP
I905	T900963	IC VIPER 20
I905A	H224085	F9-4-220D-2LS
I943	T900796	&TL431CZ-AP SGS
I964	T548013	CNY17F1/6 SIEMENS BEABT
I997	T548016	PC817B OPTO BEAB
I998	T548016	PC817B OPTO BEAB
I999	T548013	CNY17F1/6 SIEMENS BEABT
IA01	T900955	TDA7490L
IA04	T900978	TDA2822D SO8
IR01	T549018	& IR REC TSOP2838UH1 TEMIC
K118	J0796491R	RMC73M-000R
K120	J0195248R	RMC73--000R
K121	J0195248R	RMC73--000R
K126	J0796491R	RMC73M-000R
K129	J0195250R	RMC73S 000R
K132	J0195248R	RMC73--000R
K133	J0796491R	RMC73M-000R
K135	J0195248R	RMC73--000R
K136	J0195248R	RMC73--000R
K137	J0796491R	RMC73M-000R
K139	J0195248R	RMC73--000R
K141	J0195250R	RMC73S 000R
K142	J0195250R	RMC73S 000R
K146	J0195248R	RMC73--000R
K152	J0195250R	RMC73S 000R
K157	J0195248R	RMC73--000R
K16	J0195250R	RMC73S 000R
K161	J0195248R	RMC73--000R
K165	J0195248R	RMC73--000R
K166	J0796491R	RMC73M-000R
K167	J0195250R	RMC73S 000R
K168	J0195250R	RMC73S 000R
K170	J0796491R	RMC73M-000R
K171	J0195248R	RMC73--000R
K175	J0195250R	RMC73S 000R
K176	J0195250R	RMC73S 000R
K182	J0796491R	RMC73M-000R
K183	J0796491R	RMC73M-000R
K189	J0796491R	RMC73M-000R
K192	J0796491R	RMC73M-000R
K197	J0195248R	RMC73--000R
K198	J0195248R	RMC73--000R
K199	J0195250R	RMC73S 000R
K20	J0195250R	RMC73S 000R
K200	J0195248R	RMC73--000R
K202	J0195250R	RMC73S 000R
K203	J0195248R	RMC73--000R
K206	J0796491R	RMC73M-000R
K216	J0796491R	RMC73M-000R
K220	J0796491R	RMC73M-000R
K225	J0195248R	RMC73--000R
K231	J0195248R	RMC73--000R
K233	J0195250R	RMC73S 000R
K236	J0195250R	RMC73S 000R
K237	J0195250R	RMC73S 000R
K240	J0195250R	RMC73S 000R
K241	J0195250R	RMC73S 000R
K242	J0195250R	RMC73S 000R
K243	J0195250R	RMC73S 000R
K25	J0195248R	RMC73--000R
K262	J0195250R	RMC73S 000R
K266	J0195250R	RMC73S 000R
K267	J0796491R	RMC73M-000R
K271	J0796491R	RMC73M-000R
K288	J0195248R	RMC73--000R
K289	J0796491R	RMC73M-000R
K293	J0195248R	RMC73--000R
K299	J0796491R	RMC73M-000R
K300	J0195250R	RMC73S 000R
K303	J0195250R	RMC73S 000R
K310	J0195250R	RMC73S 000R
K333	J0796491R	RMC73M-000R
K341	J0195248R	RMC73--000R
K343	J0195248R	RMC73--000R
K345	J0796491R	RMC73M-000R
K346	J0796491R	RMC73M-000R
K350	J0195248R	RMC73--000R
K39	J0195250R	RMC73S 000R
K504	J0195250R	RMC73S 000R
K510	J0796491R	RMC73M-000R
K512	J0195248R	RMC73--000R
K513	J0796491R	RMC73M-000R
K64	J0195250R	RMC73S 000R
K66	J0195248R	RMC73--000R
K67	J0195248R	RMC73--000R
K68	J0796491R	RMC73M-000R
K84	J0195248R	RMC73--000R
K85	J0195250R	RMC73S 000R
K86	J0195250R	RMC73S 000R
K87	A306099	BRACKET ASSEMBLY
K88	J0195248R	RMC73--000R
KVR900	W024001	0.56ML SFT TIN'D COP WIRE
L001	J2122943M	AXIAL COIL 10UH-J
L002	J2122943M	AXIAL COIL 10UH-J

A529290 PARTS LIST

I.D.	Part No.	Description
L003	J2122943M	AXIAL COIL 10UH-J
L200	J0195250R	RMC73S 000R
L201	J0195250R	RMC73S 000R
L202	J0195250R	RMC73S 000R
L203	J0195250R	RMC73S 000R
L204	J0195250R	RMC73S 000R
L205	J0195250R	RMC73S 000R
L208	J0195250R	RMC73S 000R
L210	J0195250R	RMC73S 000R
L256	J2123781R	FILTER COIL EL101K
L309	L420187	BLM11A102S
L310	L420187	BLM11A102S
L311	J0796491R	RMC73M-000R
L312	J0195250R	RMC73S 000R
L313	J0796491R	RMC73M-000R
L314	J0796491R	RMC73M-000R
L315	J0796491R	RMC73M-000R
L317	J0796491R	RMC73M-000R
L318	J0796491R	RMC73M-000R
L330	J2122956M	COIL LAL 100UH K
L331	J0796491R	RMC73M-000R
L333	L420187	BLM11A102S
L334	L420187	BLM11A102S
L335	J0195250R	RMC73S 000R
L336	J0796491R	RMC73M-000R
L337	J0796491R	RMC73M-000R
L338	J0796491R	RMC73M-000R
L340	J0796491R	RMC73M-000R
L341	J0796491R	RMC73M-000R
L348	J0796491R	RMC73M-000R
L349	J2123781R	FILTER COIL EL101K
L350	J2123781R	FILTER COIL EL101K
L351	J2123781R	FILTER COIL EL101K
L358	J0796491R	RMC73M-000R
L400	J2123781R	FILTER COIL EL101K
L419	L420187	BLM11A102S
L420	J2122943M	AXIAL COIL 10UH-J
L422	L420187	BLM11A102S
L423	J2122943M	AXIAL COIL 10UH-J
L443	L420187	BLM11A102S
L444	J2122943M	AXIAL COIL 10UH-J
L446	L420187	BLM11A102S
L447	J2122943M	AXIAL COIL 10UH-J
L451	J2122253M	AXIAL COIL 100uH K TAPE
L452	J2122253M	AXIAL COIL 100uH K TAPE
L453	J2122253M	AXIAL COIL 100uH K TAPE
L540	J2123781R	FILTER COIL EL101K
L552	J2122943M	AXIAL COIL 10UH-J
L553	J2123781R	FILTER COIL EL101K
L601	J2123462M	FERRITE BEADS TYPE B2.3UH
L602	L300002	RL8010-100J-UL-HUK-B06
L604	L300002	RL8010-100J-UL-HUK-B06
L700	JBH00039	HC-820KS1 (LHL10)
L701	J2123461M	FERRITE BEAD 0.8uH
L702	L380178	LIN COIL ISKRA
L704	J2123461M	FERRITE BEAD 0.8uH
L705	J2123462M	FERRITE BEADS TYPE B2.3UH
L751	L380117	BRIDGE COIL 5MH
L752	L380147	&BRIDGE COIL
L900	L210068	M/FILTER 97192 RIFA BEAB
L901	L210068	M/FILTER 97192 RIFA BEAB
L902	J2123462M	FERRITE BEADS TYPE B2.3UH
L903	J2123462M	FERRITE BEADS TYPE B2.3UH
L904	J2125579	CHOKE COIL 47UH
L905	J2123462M	FERRITE BEADS TYPE B2.3UH
L909	J2123462M	FERRITE BEADS TYPE B2.3UH
L911	L300005	RL8010-180J-UL-HUK-B06
L921	J2123462M	FERRITE BEADS TYPE B2.3UH
L931	J2123462M	FERRITE BEADS TYPE B2.3UH
L932	J2123462M	FERRITE BEADS TYPE B2.3UH
L935	J2123462M	FERRITE BEADS TYPE B2.3UH
L939	J2123462M	FERRITE BEADS TYPE B2.3UH
L955	J2123462M	FERRITE BEADS TYPE B2.3UH
L957	J2123462M	FERRITE BEADS TYPE B2.3UH
L961	L380184	BUCK COIL E20/10/5
L965	J2123462M	FERRITE BEADS TYPE B2.3UH
L992	J2123462M	FERRITE BEADS TYPE B2.3UH
LA01	JBH00034	HC-330K SI LH10TK
LA02	L380176	33UH PANASONIC ELC12E330
LA03	JBH00034	HC-330K SI LH10TK
LA04	L380176	33UH PANASONIC ELC12E330
LED2	T547049	SLR-325VC LED RED
LS201	J2122956M	COIL LAL 100UH K
LS42	J2123103M	LAL 02 AXIAL COIL 10uH
LS60	J2123103M	LAL 02 AXIAL COIL 10uH
P10	J2902261	PLG-02P2R5VPWB
P1015	J2902263	PLG-04P2R5VPWB
P302	J2902261	PLG-02P2R5VPWB
P303	J2902261	PLG-02P2R5VPWB
P701	J2661753	4 PIN PLUG WITH BASE
P802	J2902267	PLG-08P2R5V PWB
P803	J2902264	PLG-05P 2R5V PWB
P9	J2902261	PLG-02P2R5VPWB
P900	E825259	2 WAY MAIN HEADER UL BEAB
P902	J2661751	2P PIN PLUG & BASE
PA04	J2902263	PLG-04P2R5VPWB
PHONO2	E826951	STEREO PHONO SOCKET
Q002	T633153	2N7002 MOSFET
Q003	J2325691R	TRS 2SC2412K T146Q/R
Q004	J2325691R	TRS 2SC2412K T146Q/R
Q005	T633153	2N7002 MOSFET
Q006	J2325691R	TRS 2SC2412K T146Q/R
Q007	J2325691R	TRS 2SC2412K T146Q/R
Q008	J2325691R	TRS 2SC2412K T146Q/R
Q011	J2325691R	TRS 2SC2412K T146Q/R
Q200	J2325691R	TRS 2SC2412K T146Q/R
Q212	T631302	& DTC114YKAT146
Q213	T631302	& DTC114YKAT146
Q214	T631302	& DTC114YKAT146
Q215	T631302	& DTC114YKAT146

A529290 PARTS LIST

I.D.	Part No.	Description
Q216	J2328161R	TRS 2SC4265JC02TR
Q217	J2325691R	TRS 2SC2412K T146Q/R
Q330	J2325781R	TRS 2SA1037K T146Q/R
Q332A	J2325781R	TRS 2SA1037K T146Q/R
Q400	J2325691R	TRS 2SC2412K T146Q/R
Q401	J2325691R	TRS 2SC2412K T146Q/R
Q402	J2325691R	TRS 2SC2412K T146Q/R
Q403	J2325691R	TRS 2SC2412K T146Q/R
Q412	J2325781R	TRS 2SA1037K T146Q/R
Q413	J2316691R	STC-DTC144EK T146
Q501	J2325781R	TRS 2SA1037K T146Q/R
Q505	J2325781R	TRS 2SA1037K T146Q/R
Q507	J2325691R	TRS 2SC2412K T146Q/R
Q508	J2325691R	TRS 2SC2412K T146Q/R
Q509	J2325781R	TRS 2SA1037K T146Q/R
Q605	J2325691R	TRS 2SC2412K T146Q/R
Q606	J2325781R	TRS 2SA1037K T146Q/R
Q631	T636077	&IRFS530A ISOL SAMSUNG
Q631A	G884023	SPRING CLIP
Q701	T633137	TRANS BF459 MULLARD/SES
Q702	T732016	P0109DA THYRISTOR SGS
Q711	J2325781R	TRS 2SA1037K T146Q/R
Q751	J2315451	TRS-BU2508AF
Q751A	G884020	SPRING CLIP 56379-MULLARD
Q777	J2315891R	TRS JC548B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235418	POWER HEATSINK(TERNEX)
Q903B	G884020	SPRING CLIP 56379-MULLARD
Q904	T636077	&IRFS530A ISOL SAMSUNG
Q911	T636077	&IRFS530A ISOL SAMSUNG
Q912	T631309	TRANS BC557B BANDED
Q913	T633133	TRANS BF422 BAND MULL/AEG
Q919	J2315921R	TRS JC558B
Q922	J2315891R	TRS JC548B
Q923	T900796	&TL431CZ-AP SGS
Q927	T636094	MOSFET IRF640
Q927A	H224085	F9-4-220D-2LS
Q929	W024001	0.56ML SFT TIN'D COP WIRE
Q932	T633133	TRANS BF422 BAND MULL/AEG
Q951	J2315891R	TRS JC548B
Q964	T900473	SHUNT REG TL431CLP MOT/TEX
QA01	J2325691R	TRS 2SC2412K T146Q/R
QS40	J2325691R	TRS 2SC2412K T146Q/R
QS44	J2325781R	TRS 2SA1037K T146Q/R
QS60	J2325691R	TRS 2SC2412K T146Q/R
QS61	J2325781R	TRS 2SA1037K T146Q/R
R001	J0196093R	RMC73M-1F103JR
R002	J0196043R	RMC73M-1F101JR
R004	J0196093R	RMC73M-1F103JR
R005	J0196043R	RMC73M-1F101JR
R006	J0195883R	RMC73S 2A221JR
R007	J0195001R	RMC73 2B101JR
R008	J0196093R	RMC73M-1F103JR
R009	J0196093R	RMC73M-1F103JR
R010	J0196093R	RMC73M-1F103JR
R011	J0196093R	RMC73M-1F103JR
R012	J0196093R	RMC73M-1F103JR
R013	J0196043R	RMC73M-1F101JR
R014	J0196043R	RMC73M-1F101JR
R015	J0196043R	RMC73M-1F101JR
R016	J0196043R	RMC73M-1F101JR
R017	J0196093R	RMC73M-1F103JR
R018	J0196093R	RMC73M-1F103JR
R019	J0196086R	RMC73M-1F562JR
R020	J0196093R	RMC73M-1F103JR
R021	J0196068R	RMC73M-1F102JR
R022	J0196068R	RMC73M-1F102JR
R023	J0196068R	RMC73M-1F102JR
R024	J0195927R	RMC73S 2A123JR
R025	J0196095R	RMC73M - 1F123JR
R026	J0195032R	RMC73--2B393JR 1%
R027	J0196095R	RMC73M - 1F123JR
R028	J0195927R	RMC73S 2A123JR
R029	J0195933R	RMC73S 2A223JR
R030	J0195939R	RMC73S2A393JR
R031	J0195933R	RMC73S 2A223JR
R032	J0700054M	10K 1/16W C/FILM 5%
R033	J0196093R	RMC73M-1F103JR
R036	J0700054M	10K 1/16W C/FILM 5%
R037	J0195025R	RMC73 - 2B103JR
R038	J0196093R	RMC73M-1F103JR
R039	J0700049M	4K7 1/16W C/FILM 5%
R040	J0700041M	1K 1/16W C/FILM 5%
R041	J0700041M	1K 1/16W C/FILM 5%
R042	J0195875R	RMC73S 2A101JR
R043	J0700027M	100R 1/16W C/FILM 5%
R044	J0700027M	100R 1/16W C/FILM 5%
R045	J0196043R	RMC73M-1F101JR
R046	J0700027M	100R 1/16W C/FILM 5%
R047	J0196051R	RMC73M-1F221JR
R048U	J0700027M	100R 1/16W C/FILM 5%
R052	J0195875R	RMC73S 2A101JR
R053	J0196043R	RMC73M-1F101JR
R054	J0195013R	RMC73 2B102JR
R055	J0195013R	RMC73 2B102JR
R056	J0195013R	RMC73 2B102JR
R057	J0196093R	RMC73M-1F103JR
R058	J0196093R	RMC73M-1F103JR
R059	J0196093R	RMC73M-1F103JR
R060	J0196093R	RMC73M-1F103JR
R061	J0196093R	RMC73M-1F103JR
R062	J0196093R	RMC73M-1F103JR
R063	J0196043R	RMC73M-1F101JR
R064	J0196093R	RMC73M-1F103JR
R065	J0196043R	RMC73M-1F101JR
R066	J0195894R	RMC73S2A621JR 620R
R067	J0196093R	RMC73M-1F103JR
R070	J0196093R	RMC73M-1F103JR
R071	J0196093R	RMC73M-1F103JR
R074	J0195925R	RMC73S 2A103JR

A529290 PARTS LIST

I.D.	Part No.	Description
R075	J0195941R	RMC73S 2A473JR
R078	J0196093R	RMC73M-1F103JR
R079	J0196043R	RMC73M-1F101JR
R080	J0196043R	RMC73M-1F101JR
R081	J0196053R	RMC73M - 1F271JR
R082	J0196093R	RMC73M-1F103JR
R083	J0196043R	RMC73M-1F101JR
R084	J0196043R	RMC73M-1F101JR
R085	J0195875R	RMC73S 2A101JR
R090	J0700027M	100R 1/16W C/FILM 5%
R091	J0196043R	RMC73M-1F101JR
R092	J0196078R	RMC73M-1F272JR
R093	J0196043R	RMC73M-1F101JR
R094	J0196043R	RMC73M-1F101JR
R095	J0196043R	RMC73M-1F101JR
R096	J0196043R	RMC73M-1F101JR
R097	J0700027M	100R 1/16W C/FILM 5%
R098	R120330	100R 1/4W DRG NO
R099	J0196043R	RMC73M-1F101JR
R230	J0195918R	RMC73S 2A562JR
R257	J0700027M	100R 1/16W C/FILM 5%
R258	J0700027M	100R 1/16W C/FILM 5%
R259	J0195900R	RMC73S 2A102JR
R261	J0195250R	RMC73S 000R
R263	J0195885R	RMC73S 2A271JR
R264	J0195918R	RMC73S 2A562JR
R265	J0700038M	680R 1/16W C/FILM 5%
R266	J0196078R	RMC73M-1F272JR
R267	J0195018R	RMC73 2B272JR
R268	J0195910R	RMC73S-2A272JR
R269	J0195250R	RMC73S 000R
R270	J0195250R	RMC73S 000R
R271	J0195875R	RMC73S 2A101JR
R272	J0195920R	RMC73S 2A682JR
R273	J0196070R	RMC73M - 1F122JR
R274	J0196043R	RMC73M-1F101JR
R275	J0195893R	RMC73S 2A561JR
R276	J0195001R	RMC73 2B101JR
R277	J0195895R	RMC73S 2A681JR
R281	J0195885R	RMC73S 2A271JR
R282	J0195931R	RMC73S 2A183JR
R300	J0195943R	RMC73S-2A563JR
R303	J0195871R	RMC73S 2A750JR
R305	J0195871R	RMC73S 2A750JR
R306	J0195871R	RMC73S 2A750JR
R307	J0195875R	RMC73S 2A101JR
R309	J0195868R	RM73S 2A560JR 56R
R311	J0195871R	RMC73S 2A750JR
R314	J0195950R	RMC73S 2A104JR
R315	J0196093R	RMC73M-1F103JR
R317	J0195016R	RMC73--2B182JR 1K8 1206
R319	J0195001R	RMC73 2B101JR
R320	J0195871R	RMC73S 2A750JR
R321	J0196043R	RMC73M-1F101JR
R322	J0196043R	RMC73M-1F101JR
R323	J0195871R	RMC73S 2A750JR
R326	J0195871R	RMC73S 2A750JR
R330	J0195871R	RMC73S 2A750JR
R331	J0196043R	RMC73M-1F101JR
R332	J0195950R	RMC73S 2A104JR
R333	J0196043R	RMC73M-1F101JR
R334	J0195868R	RM73S 2A560JR 56R
R335	J0195871R	RMC73S 2A750JR
R336	J0196043R	RMC73M-1F101JR
R337	J0196043R	RMC73M-1F101JR
R338	J0195875R	RMC73S 2A101JR
R339	J0113722M	RDO5S2H750JB
R340	J0195875R	RMC73S 2A101JR
R342	J0195925R	RMC73S 2A103JR
R344	J0195906R	RMC73S--2A182JR
R346	J0700027M	100R 1/16W C/FILM 5%
R347	J0195001R	RMC73 2B101JR
R349	J0195875R	RMC73S 2A101JR
R350	J0195943R	RMC73S-2A563JR
R351	J0195895R	RMC73S 2A681JR
R352	J0196111R	RMC73M - 1F563JR
R353	J0195871R	RMC73S 2A750JR
R355	J0195871R	RMC73S 2A750JR
R356	J0195871R	RMC73S 2A750JR
R357	J0196093R	RMC73M-1F103JR
R358	J0195906R	RMC73S--2A182JR
R359	J0195871R	RMC73S 2A750JR
R360	J0196093R	RMC73M-1F103JR
R361	J0196093R	RMC73M-1F103JR
R389	J0196103R	RMC73M - 1F273JR
R390	J0195895R	RMC73S 2A681JR
R400	J0195900R	RMC73S 2A102JR
R401	J0195950R	RMC73S 2A104JR
R402	J0195945R	RMC73S 2A683JR
R403	J0195875R	RMC73S 2A101JR
R404	J0195943R	RMC73S-2A563JR
R405	J0195943R	RMC73S-2A563JR
R406	J0196059R	RMC73M-1F471JR
R407	J0195875R	RMC73S 2A101JR
R408	J0196068R	RMC73M-1F102JR
R409	J0113725M	100R RES CARBON FILM 1/2W
R410	J0196072R	RMC73M-1F152JR
R411	J0195900R	RMC73S 2A102JR
R412	J0196113R	RMC73M - 1F683JR
R413	J0196059R	RMC73M-1F471JR
R414	J0196043R	RMC73M-1F101JR
R415	J0196059R	RMC73M-1F471JR
R416	J0196043R	RMC73M-1F101JR
R417	J0195037R	RMC73 2B104JR
R419	J0195950R	RMC73S 2A104JR
R423	J0195950R	RMC73S 2A104JR
R424	J0195891R	RMC73S 2A471JR
R433	J0195875R	RMC73S 2A101JR
R434	J0195875R	RMC73S 2A101JR
R435	J0196066R	RMC73M - 1F911JR

A529290 PARTS LIST

I.D.	Part No.	Description
R436	J0796491R	RMC73M-000R
R437	J0796491R	RMC73M-000R
R438	J0196060R	RMC73M-1F511JR 510R
R439	J0196060R	RMC73M-1F511JR 510R
R440	J0196066R	RMC73M - 1F911JR
R441	J0196084R	RMC73M-1F472JR
R442	J0700034M	330R 1/16W C/FILM 5%
R446	J0195950R	RMC73S 2A104JR
R447	J0195891R	RMC73S 2A471JR
R448	J0196043R	RMC73M-1F101JR
R454	J0195950R	RMC73S 2A104JR
R465	J0196093R	RMC73M-1F103JR
R467	J0196093R	RMC73M-1F103JR
R469	J0195875R	RMC73S 2A101JR
R470	J0195875R	RMC73S 2A101JR
R471	J0700027M	100R 1/16W C/FILM 5%
R474	J0196043R	RMC73M-1F101JR
R475	J0196043R	RMC73M-1F101JR
R477	J0700027M	100R 1/16W C/FILM 5%
R478	J0700027M	100R 1/16W C/FILM 5%
R479	J0700027M	100R 1/16W C/FILM 5%
R480	J0700027M	100R 1/16W C/FILM 5%
R481	J0700027M	100R 1/16W C/FILM 5%
R482	J0700027M	100R 1/16W C/FILM 5%
R483	J0195875R	RMC73S 2A101JR
R484	J0195875R	RMC73S 2A101JR
R485	J0700027M	100R 1/16W C/FILM 5%
R486	J0195925R	RMC73S 2A103JR
R487	J0700027M	100R 1/16W C/FILM 5%
R488	J0195925R	RMC73S 2A103JR
R489	J0700027M	100R 1/16W C/FILM 5%
R490	J0700027M	100R 1/16W C/FILM 5%
R491	J0195925R	RMC73S 2A103JR
R492	J0195925R	RMC73S 2A103JR
R493	J0196068R	RMC73M-1F102JR
R494	J0196068R	RMC73M-1F102JR
R496	J0196088R	RMC73M-1F682JR
R497	J0196105R	RMC73M-1F333JR
R498	J0196043R	RMC73M-1F101JR
R499	J0196051R	RMC73M-1F221JR
R500	J0195929R	RMC73S 2A153JR
R501	J0195025R	RMC73 - 2B103JR
R502	J0196090R	RMC73M-1F822JR 8K2 0603
R504	J0196088R	RMC73M-1F682JR
R509	J0195939R	RMC73S2A393JR
R532	J0195875R	RMC73S 2A101JR
R533	J0195900R	RMC73S 2A102JR
R534	J0195875R	RMC73S 2A101JR
R535	J0195875R	RMC73S 2A101JR
R536	J0195875R	RMC73S 2A101JR
R537	J0195875R	RMC73S 2A101JR
R538	J0700027M	100R 1/16W C/FILM 5%
R539	J0700027M	100R 1/16W C/FILM 5%
R540	J0195875R	RMC73S 2A101JR
R541	J0195057R	RMC73 2B431JR 430R 1206
R542	J0700027M	100R 1/16W C/FILM 5%
R543	J0700027M	100R 1/16W C/FILM 5%
R544	J0195887R	RMC73S 2A331JR
R545	J0195875R	RMC73S 2A101JR
R546	J0196043R	RMC73M-1F101JR
R547	J0196043R	RMC73M-1F101JR
R548	J0195007R	RMC73--2B331JR
R549	J0195879R	RMC73S 2A151JR
R550	J0196049R	RMC73M-1F181JR 180R 0603
R560	J0195001R	RMC73 2B101JR
R571	J0196068R	RMC73M-1F102JR
R586	J0195891R	RMC73S 2A471JR
R589	J0195910R	RMC73S-2A272JR
R600	J0196093R	RMC73M-1F103JR
R602	J0113684M	RNL-2R2J1-02LT
R603	J0113684M	RNL-2R2J1-02LT
R605	J0700075M	390K 1/16W C/FILM 5%
R606	J0195941R	RMC73S 2A473JR
R607	J0196043R	RMC73M-1F101JR
R608	J0195875R	RMC73S 2A101JR
R610	R232330	2K2 1/4W DRG NO
R611	R326330	360R 1/4W DRG NO
R612	R217330	27R 1/4W DRG NO
R613	R658330	680K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R616	J0196068R	RMC73M-1F102JR
R634	R232330	2K2 1/4W DRG NO
R635	R232330	2K2 1/4W DRG NO
R636	J0700051M	5K6 1/16W C/FILM 5%
R637	R120330	100R 1/4W DRG NO
R638	J0700049M	4K7 1/16W C/FILM 5%
R639	J0700049M	4K7 1/16W C/FILM 5%
R666	J0196068R	RMC73M-1F102JR
R667	J0700049M	4K7 1/16W C/FILM 5%
R702	R333330	3K3 1/4W DRG NO
R704	R648330	68K 1/4W DRG NO
R705	J0140931S	RSL-332J7WS(BSR-Z)
R706	R437571	4K7 2W 5% M02SL
R707	R135330	1K5 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R710	R217571	27R 2W 5% MO2SL
R710A	R217571	27R 2W 5% MO2SL
R711	R217571	27R 2W 5% MO2SL
R711A	R217571	27R 2W 5% MO2SL
R712	J0195925R	RMC73S 2A103JR
R713	J0100069M	RES FLM 1/8W 1.5K
R714	J0113748M	RD14S2H821JB
R715	J0110163S	RS08B3A562JS
R716	J0700054M	10K 1/16W C/FILM 5%
R717	J0700072M	220K 1/16W C/FILM 5%
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119649M	RN14S2B563FB(KOA)
R720	J0140933S	RSL-472J7WS(BSR-Z)
R724	J0110273S	RSO8B3D153JS
R725	R232570	2K2 1W 5% MO1SL

A529290 PARTS LIST

I.D.	Part No.	Description
R731	R217571	27R 2W 5% MO2SL
R731A	R217571	27R 2W 5% MO2SL
R732	R217571	27R 2W 5% MO2SL
R732A	R217571	27R 2W 5% MO2SL
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R531330	5K1 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R738	R232330	2K2 1/4W DRG NO
R740	R457330	470K 1/4W DRG NO
R742	J0113735M	RD14S2H271JB
R745	R437330	4K7 1/4W DRG NO
R746	R120571	100R 2W 5% M02SL
R749	R242330	22K 1/4W DRG NO
R752	J0700074M	330K 1/16W C/FILM 5%
R757	J0700063M	47K 1/16W C/FILM 5%
R759	R536330	5K6 1/4W DRG NO
R764	R150330	100K 1/4W DRG NO
R765	J0700027M	100R 1/16W C/FILM 5%
R767	J0195875R	RMC73S 2A101JR
R768	J0196093R	RMC73M-1F103JR
R769	J0195902R	RMC73S 2A122JR
R770	R140730	10K 2% 1/4W MFR4
R776	J0700073M	270K 1/16W C/FILM 5%
R778	J0700056M	15K 1/16W C/FILM 5%
R779	R120571	100R 2W 5% M02SL
R780	R232330	2K2 1/4W DRG NO
R901	R242571	22K 2W M02S
R902	R546330	56K 1/4W DRG NO
R903	R222330	220R 1/4W DRG NO
R905	R150330	100K 1/4W DRG NO
R906	R130330	1K 1/4W DRG NO
R908	R130330	1K 1/4W DRG NO
R909	J0147642	RW99J3Y220JM 22R 7W
R911	R132725	1K2 MRS16T 1% M/F 1/16W
R912	R842736	82K 1% MF MFR4
R913	R447330	47K 1/4W DRG NO
R915	R658725	680K MRS16T 1% M/F
R916	J0700049M	4K7 1/16W C/FILM 5%
R917	R658725	680K MRS16T 1% M/F
R920	R140330	10K 1/4W DRG NO
R921	R546736	56K MFR4 1% 1/4W
R922	R247725	27K MRS16T1% M/FILM
R927	J0110281S	RS08B3D333JS
R932	R120330	100R 1/4W DRG NO
R933	J0700049M	4K7 1/16W C/FILM 5%
R941	R536330	5K6 1/4W DRG NO
R942	R521330	510R 1/4W DRG NO
R943	R120330	100R 1/4W DRG NO
R944	R244725	24K MRS16T 1% 1/16W
R945	R140725	10K MRS16T 1% M/FILM
R946	J0147544	RW99J3H150JM 15R 5W
R950	R433725	4K3 MRS16T 1/16W 1%
R951	R110731	10R 1/2W M/F MFR5 2%
R952	J0700058M	22K 1/16W C/FILM 5%
R953	J0700049M	4K7 1/16W C/FILM 5%
R954	J0700049M	4K7 1/16W C/FILM 5%
R956	R000618	0.5R 2W WIRE WOUND 5%
R957	R323330	330R 1/4W DRG NO
R958	R842736	82K 1% MF MFR4
R959	R556725	560K MRS16T 1% M/FILM
R960	R133725	1K3 MRS16T 1% M/FILM
R961	J0700052M	6K8 1/16W C/FILM 5%
R962	R130330	1K 1/4W DRG NO
R963	J0700041M	1K 1/16W C/FILM 5%
R966	R130330	1K 1/4W DRG NO
R967	J0700072M	220K 1/16W C/FILM 5%
R968	R000618	0.5R 2W WIRE WOUND 5%
R969	R242330	22K 1/4W DRG NO
R970	R120330	100R 1/4W DRG NO
R971	J0144050	ERF5ZK122 1K2 KOA RES 5W
R972	R150744	&100K 3W PRO3 M/F LANCET
R975	J0700041M	1K 1/16W C/FILM 5%
R976	R323330	330R 1/4W DRG NO
R977	R120330	100R 1/4W DRG NO
R978	R427330	470R 1/4W DRG NO
R980	R100551	1R 1/4W FR8225(TDK)-BEAB-
R981	J0700064M	56K 1/16W C/FILM 5%
R982	R319330	39R 1/4W DRG NO
R985	J0187072M	2K0 1/16W PHILIPS
R986	R150330	100K 1/4W DRG NO
R987	R319330	39R 1/4W DRG NO
R988	J0700067M	100K 1/16W C/FILM 5%
R989	E441045	PTC TYPE 2322-662-96624
R990	R316330	36R 1/4W
R991	R353714	330K 1/2W METAL FLM-BEAB
R992	J0700058M	22K 1/16W C/FILM 5%
R993	J0700056M	15K 1/16W C/FILM 5%
R994	R323330	330R 1/4W DRG NO
R996	R427330	470R 1/4W DRG NO
R997	J0187092M	RD14S1J133JB
R998	R323571	330R 2W 5% MO2S F
R999	R170727	10M 1W VR68 UL BEAB
RA01	J0700027M	100R 1/16W C/FILM 5%
RA02	J0196093R	RMC73M-1F103JR
RA03	J0700047M	3K3 1/16W C/FILM 5%
RA04	J0700055M	12K 1/16W C/FILM 5%
RA05	R120330	100R 1/4W DRG NO
RA06	J0196101R	RMC73M-1F223JR 1608
RA07	J0196111R	RMC73M - 1F563JR
RA08	J0196113R	RMC73M - 1F683JR
RA09	J0196101R	RMC73M-1F223JR 1608
RA10	J0196111R	RMC73M - 1F563JR
RA11	J0196084R	RMC73M-1F472JR
RA12	J0196113R	RMC73M - 1F683JR
RA13	J0196093R	RMC73M-1F103JR
RA14	R120330	100R 1/4W DRG NO
RA15	J0196084R	RMC73M-1F472JR
RA16	J0196104R	RMC73M-1F303JR 30K 0603
RA17	J0195953R	RMC73S-2A134JR 130K
RA18	J0700012M	6R8 1/16W C/FILM 5%

A529290 PARTS LIST

I.D.	Part No.	Description
RA19	J0195025R	RMC73 - 2B103JR
RA20	J0187086M	RD14S1J752JB
RA21	J0195025R	RMC73 - 2B103JR
RA22	J0187086M	RD14S1J752JB
RA23	J0196078R	RMC73M-1F272JR
RA24	J0700054M	10K 1/16W C/FILM 5%
RA25	J0196093R	RMC73M-1F103JR
RA26	J0195916R	RMC73S 2A472JR
RA27	R427748	470R 3W PRO3 5% TAPED
RA31	J0796491R	RMC73M-000R
RA32	J0196078R	RMC73M-1F272JR
RA33	J0195945R	RMC73S 2A683JR
RA34	J0195945R	RMC73S 2A683JR
RA35	J0195910R	RMC73S-2A272JR
RA36	J0196045R	RMC73M-1F121JR 120R 1608
RA37	J0196045R	RMC73M-1F121JR 120R 1608
RA38	J0196118R	RMC73M-1F104JR 100K
RA39	J0196030R	RMC73M-1F330JR 33R
RA40	J0196118R	RMC73M-1F104JR 100K
RA41	J0196030R	RMC73M-1F330JR 33R
RA45	J0113725M	100R RES CARBON FILM 1/2W
RM01	J0196043R	RMC73M-1F101JR
RM02	J0196043R	RMC73M-1F101JR
RM05	J0195001R	RMC73 2B101JR
RM06	J0196043R	RMC73M-1F101JR
RM07	J0700027M	100R 1/16W C/FILM 5%
RM08	J0196043R	RMC73M-1F101JR
RM09	J0196043R	RMC73M-1F101JR
RM10	J0196043R	RMC73M-1F101JR
RM13	J0196093R	RMC73M-1F103JR
RM14	J0196093R	RMC73M-1F103JR
RM15	J0195025R	RMC73 - 2B103JR
RM16	J0195025R	RMC73 - 2B103JR
RM17	J0196093R	RMC73M-1F103JR
RM51	J0700054M	10K 1/16W C/FILM 5%
RS40	J0700049M	4K7 1/16W C/FILM 5%
RS41	J0195900R	RMC73S 2A102JR
RS46	J0196118R	RMC73M-1F104JR 100K
RS47	J0196068R	RMC73M-1F102JR
RS49	J0700041M	1K 1/16W C/FILM 5%
RS60	J0196118R	RMC73M-1F104JR 100K
RS61	J0196084R	RMC73M-1F472JR
RS62	J0700041M	1K 1/16W C/FILM 5%
RS64	J0195900R	RMC73S 2A102JR
RS65	J0195900R	RMC73S 2A102JR
S001	E139506	5 WAY TACT SWITCH
SCART1	E826946	A20 DOUBLE SCART
SCART2	E826945	SINGLE SCART METALLO
SHROUD	X321241	&ACTUATOR SHROUD
SW900	J2634732	SWITCH SDD-FC BEAB
T700	JBW01041	FBT HFL1532G BEABT
T702	J2260291U	H DRIVE TRANSFORMER TAW
T900	L380172	SW MODE EE4215 OREGA BEAB
T902	L380181	SW MODE XXXX CT286D8 BEAB
VR904	E311108	500R POT HORIZONTAL TAPE
VR964	J0160211R	EVND8AA03B13-TAPE(PANA)
W002	EC5A100A	7/0.2MM S000030
W003	EC5A060A	7/0.2MM S000030
W005	EC530603	7/0.2MM S000010
W008	EC5A120A	7/0.2 S000030
W009	EC5A060A	7/0.2MM S000030
W010	EC530903	7/0.2MM S000029
W018	EC530203	7/0.2MM S000010
W019	EC530603	7/0.2MM S000010
W020	EC530303	7/0.2MM S000010
W021	EC5A120A	7/0.2 S000030
W022	EC530903	7/0.2MM S000029
W023	EC530203	7/0.2MM S000010
W024	EC5A110A	7/0.2MM S000030
X001	E516081F	CRYSTAL 6MHZ
X200	E518054	K9453M
X219	E518053	K3953M
X305	L420187	BLM11A102S
X412	E516070	X'TAL 18.432MHZ
X513	E516030F	12MHz X'TAL NDK 5MM LEG
Z005	T536219	BZX79B3V3~PHILIPS~
Z006	T536312	PDZ-B 3.6B 2% SMT ZENER
Z007	T536279	BZX284-C5V6 5% S MOUNT
Z008	T536279	BZX284-C5V6 5% S MOUNT
Z014	T536312	PDZ-B 3.6B 2% SMT ZENER
Z205	T536215	BZX 79C 33V~PHILIPS~
Z404	T536181	BZX79C 13V~PHILIPS~
Z501	T536184	BZX79C 9V1~PHILIPS~
Z502	T536184	BZX79C 9V1~PHILIPS~
Z503	T536184	BZX79C 9V1~PHILIPS~
Z504	T536184	BZX79C 9V1~PHILIPS~
Z505	T536284	BZX284-C9V1
Z506	T536284	BZX284-C9V1
Z507	T536277	BZX284-C 4V7 5%
Z600	T536178	BZX79C 3V3~PHILIPS~
Z601	T536178	BZX79C 3V3~PHILIPS~
Z603A	T536173	BZX79C18V~PHILIPS~
Z603B	T536215	BZX 79C 33V~PHILIPS~
Z604	T536259	BZX79C56V
Z607	T536284	BZX284-C9V1
Z608	T536284	BZX284-C9V1
Z610	T536173	BZX79C18V~PHILIPS~
Z615	T536172	BZX79C27V~PHILIPS~
Z616	T536280	BZX284-C6V2
Z703	T536235	BZX79B18V~PHILIPS~
Z713	J2339251M	HZS36-ILT
Z741	T536259	BZX79C56V
Z744	T536227	BZX79B7V5~PHILIPS~
Z900	T536266	BZV85-C27V
Z927	T536173	BZX79C18V~PHILIPS~
Z942	T536179	BZX79C 6V2~PHILIPS~
Z964	T536236	BZX79B22V~PHILIPS~
Z990	T536173	BZX79C18V~PHILIPS~
Z991	T536173	BZX79C18V~PHILIPS~
Z992	T536173	BZX79C18V~PHILIPS~

A529290 PARTS LIST

I.D.	Part No.	Description
ZA01	T536279	BZX284-C5V6 5% S MOUNT
ZA08	T536268	BZV85-C22V
ZA10	T536172	BZX79C27V~PHILIPS~
ZR048A	W470200	1MM 1/D SLEEVING BLACK
ZR048B	W470200	1MM 1/D SLEEVING BLACK
ZS42	T536271	BZX284-C2V7
ZS60	T536271	BZX284-C2V7
ZZA08	W470200	1MM 1/D SLEEVING BLACK

A529350 PARTS LIST

I.D.	Part No.	Description
B800	PC55202	A20 CRT BASE PCB BEAB
C801	J0253975F	47UF 250V SME
C802	J0890082R	CCT391B50DS (MURATA)
C803	J0880016R	POLY CAP FLM 0.1UF 50V
C804	J0880016R	POLY CAP FLM 0.1UF 50V
C805	J0228058R	CC73SCH1H151JR 150PF
C806	J0228058R	CC73SCH1H151JR 150PF
C807	J0228058R	CC73SCH1H151JR 150PF
C809	J0800294R	ELECT CAP 10UF 50V SMG
C810	C242710	CAP 22N 365-41223 MULLARD
C815	J0228046R	CC73SCH1H470JR
C816	J0228046R	CC73SCH1H470JR
C817	J0228046R	CC73SCH1H470JR
C818	J0800292R	CAP ELECT 10UF 25V SMG
C819	J0228038R	CC73SCH1H220JR
C820	J0228038R	CC73SCH1H220JR
C821	J0228038R	CC73SCH1H220JR
C824	J0893031R	CKM 102K500B CNT2125
C826	J0800284R	CAP ELECTRO 3.3UF-M 50V
C827	J0800284R	CAP ELECTRO 3.3UF-M 50V
C830	J0228044R	CC73SCH1H390JR
C833	J0893027R	CKM-104K250B-CNT2125
C840	J0228046R	CC73SCH1H470JR
C841	J0228046R	CC73SCH1H470JR
C842	J0228046R	CC73SCH1H470JR
C843	J0800327R	ELECT CAP 100UF 25V SMG
C844	J0893027R	CKM-104K250B-CNT2125
C845	J0800291R	CAP ELEC 10uF 16V SMG
C846	J0880016R	POLY CAP FLM 0.1UF 50V
C860	J0800327R	ELECT CAP 100UF 25V SMG
C861	J0880016R	POLY CAP FLM 0.1UF 50V
C864	J0893027R	CKM-104K250B-CNT2125
C865	J0228048R	CC73SCH1H560JR
C867	J0893027R	CKM-104K250B-CNT2125
C868	J0893027R	CKM-104K250B-CNT2125
C870	C242711	22N 365 81223 POLY CAP
C871	C242711	22N 365 81223 POLY CAP
C872	C140711	10N 10% POLY CAPACITOR
C873	C150711	CAP 100N 36521104 100V POL
C874	C150711	CAP 100N 36521104 100V POL
C875	J0253973F	ELEC CAP SME 22UF 250V
C876	J0800321R	ELECT CAP 47UF 50V SMG
C877	J0800321R	ELECT CAP 47UF 50V SMG
C880	JAJ00138R	CC-222K202R 2N2 2KV
C8A1	J0800317R	CP ELECTRO 47UF SMG 16
D802	J2348921M	DIODE 1N4531
D803	J2348921M	DIODE 1N4531
D804	J2348921M	DIODE 1N4531
D805	J2348921M	DIODE 1N4531
D808	T531067	DIODE BAS216 S/MOUNT
D809	T531067	DIODE BAS216 S/MOUNT
D810	T531067	DIODE BAS216 S/MOUNT
D811	T531067	DIODE BAS216 S/MOUNT
D825	J2348921M	DIODE 1N4531
D834	J2331913M	DIODE 1SS83
D835	J2331913M	DIODE 1SS83
D836	J2331913M	DIODE 1SS83
D837	J2331913M	DIODE 1SS83
D838	J2331913M	DIODE 1SS83
D839	J2331913M	DIODE 1SS83
D840	J2331913M	DIODE 1SS83
D841	J2331913M	DIODE 1SS83
D842	J2331913M	DIODE 1SS83
D843	J2331913M	DIODE 1SS83
D844	J2331913M	DIODE 1SS83
D845	J2331913M	DIODE 1SS83
D846	J2348921M	DIODE 1N4531
D847	J2348921M	DIODE 1N4531
D853	J2343963M	MPG06J (TAPE) GI
D854	J2343963M	MPG06J (TAPE) GI
D861	T531067	DIODE BAS216 S/MOUNT
D862	T531067	DIODE BAS216 S/MOUNT
D864	T531067	DIODE BAS216 S/MOUNT
D865	T531067	DIODE BAS216 S/MOUNT
D8A1	J2348921M	DIODE 1N4531
E5	E843348	VM LEAD 28" 720/523
E800	E843285	GROUND LEAD MALE
E801	E822926	CPT SKT 0330770054 BEAB
G800	J2340039	SPARK GAP - FORMED
I800	T900756	L78M15CV 5OOmA
IC801	T900990	TDA6108
IC801A	H224087	HEATSINK
IC801B	J4520889	SCREW
K808	J0195248R	RMC73--000R
K834	J0195250R	RMC73S 000R
K835	J0195250R	RMC73S 000R
K836	J0195250R	RMC73S 000R
L800	L300011	RL8010-560J-UL-HUK-BO6
L805	J2123098M	LAL024R7KB
L806	J2123462M	FERRITE BEADS TYPE B2.3UH
L807	J2123462M	FERRITE BEADS TYPE B2.3UH
L808	J2123461M	FERRITE BEAD 0.8uH
L809	J2123461M	FERRITE BEAD 0.8uH
L810	J2123461M	FERRITE BEAD 0.8uH
L811	J2122239M	AXIAL COIL 10UH 10%
L813	J2122239M	AXIAL COIL 10UH 10%
L814	J2122239M	AXIAL COIL 10UH 10%
L841	J2123098M	LAL024R7KB
L842	J2123098M	LAL024R7KB
L843	J2122253M	AXIAL COIL 100uH K TAPE
P800	E843241	CPT EARTH LEAD~GREENLIGHT
P802	J2902267	PLG-08P2R5V PWB
P803	J2902266	PLG-07P2R5V PWB
P805	J2902261	PLG-02P2R5VPWB
P806	J2661752	3P PLUG PIN/BASE UL BEAB
Q840	J2325691R	TRS 2SC2412K T146Q/R
Q841	J2325691R	TRS 2SC2412K T146Q/R
Q842	J2325691R	TRS 2SC2412K T146Q/R
Q843	J2325691R	TRS 2SC2412K T146Q/R
Q844	J2325781R	TRS 2SA1037K T146Q/R

A529350 PARTS LIST

I.D.	Part No.	Description
Q845	J2325691R	TRS 2SC2412K T146Q/R
Q846	J2315921R	TRS JC558B
Q847	J2315891R	TRS JC548B
Q848	J2315921R	TRS JC558B
Q849	J2315891R	TRS JC548B
Q850	J2325781R	TRS 2SA1037K T146Q/R
Q851	J2325691R	TRS 2SC2412K T146Q/R
Q853	J2315391	TRS-2SC4793
Q853A	J3446473	HEATSINK H30 P10
Q853B	J4520883	M3X12 WITH SPRG WASHER
Q854	J2315381	TRS-2SA1837
Q854A	J3446473	HEATSINK H30 P10
Q854B	J4520883	M3X12 WITH SPRG WASHER
Q860	J2325691R	TRS 2SC2412K T146Q/R
Q861	J2325691R	TRS 2SC2412K T146Q/R
Q864	J2325781R	TRS 2SA1037K T146Q/R
Q865	J2325781R	TRS 2SA1037K T146Q/R
Q866	J2325691R	TRS 2SC2412K T146Q/R
Q867	J2325691R	TRS 2SC2412K T146Q/R
Q868	J2325781R	TRS 2SA1037K T146Q/R
Q890	J2315381	TRS-2SA1837
Q891	T633133	TRANS BF422 BAND MULL/AEG
Q892	T633143	BF423L PHILIPS
Q893	J2327773R	2SC3413 TRANSISTOR
Q894	J2327753R	2SA1390 TRANSISTOR
R802	R333330	3K3 1/4W DRG NO
R803	J0195900R	RMC73S 2A102JR
R810	J0195900R	RMC73S 2A102JR
R812	J0700041M	1K 1/16W C/FILM 5%
R813	J0195250R	RMC73S 000R
R815	J0195875R	RMC73S 2A101JR
R816	J0195875R	RMC73S 2A101JR
R817	J0195875R	RMC73S 2A101JR
R818	J0195910R	RMC73S-2A272JR
R819	J0700055M	12K 1/16W C/FILM 5%
R820	J0195950R	RMC73S 2A104JR
R821	J0700041M	1K 1/16W C/FILM 5%
R822	J0195900R	RMC73S 2A102JR
R823	J0195898R	RMC73S 2A911JR
R825	J0700044M	1K8 1/16W C/FILM 5%
R826	J0100059M	RD14S2B561JB
R827	J0195906R	RMC73S--2A182JR
R828	R309731	3.9R MFR5 2% M/FILM
R829	J0195906R	RMC73S--2A182JR
R830	J0195893R	RMC73S 2A561JR
R831	J0195906R	RMC73S--2A182JR
R832	J0113744M	RD14S2H561JB
R837	J0195908R	RMC73S 2A222JR
R838	J0113744M	RD14S2H561JB
R840	J0195902R	RMC73S 2A122JR
R841	J0195902R	RMC73S 2A122JR
R842	J0195902R	RMC73S 2A122JR
R843	J0195893R	RMC73S 2A561JR
R844	J0195893R	RMC73S 2A561JR
R845	J0195891R	RMC73S 2A471JR
R846	J0195877R	RMC73S--2A121JR
R847	J0195893R	RMC73S 2A561JR
R848	J0195893R	RMC73S 2A561JR
R849	J0195891R	RMC73S 2A471JR
R850	J0195877R	RMC73S--2A121JR
R851	J0195893R	RMC73S 2A561JR
R852	J0195893R	RMC73S 2A561JR
R853	J0195891R	RMC73S 2A471JR
R854	J0195877R	RMC73S--2A121JR
R860	J0195875R	RMC73S 2A101JR
R861	J0195902R	RMC73S 2A122JR
R862	J0195891R	RMC73S 2A471JR
R863	J0195885R	RMC73S 2A271JR
R864	J0195931R	RMC73S 2A183JR
R865	J0195908R	RMC73S 2A222JR
R867	J0195250R	RMC73S 000R
R869	J0195893R	RMC73S 2A561JR
R870	J0195893R	RMC73S 2A561JR
R871	J0195883R	RMC73S 2A221JR
R872	J0195858R	RMC73S 2A220JR 22R
R873	J0195858R	RMC73S 2A220JR 22R
R874	J0195887R	RMC73S 2A331JR
R875	J0195887R	RMC73S 2A331JR
R876	J0195914R	RMC73S 2A392JR
R877	J0195916R	RMC73S 2A472JR
R878	J0195889R	RMC73S 2A391JR
R880	R135330	1K5 1/4W DRG NO
R881	R150330	100K 1/4W DRG NO
R882	R150330	100K 1/4W DRG NO
R883	R135330	1K5 1/4W DRG NO
R884	J0113717M	RD05S2H470JB
R885	J0113717M	RD05S2H470JB
R886	R323570	330R 1W 5% MO1S F
R887	R207330	2R7 1/4W DRG NO
R888	R207330	2R7 1/4W DRG NO
R890	J0113733M	RD14S2H221JB
R892	J0195916R	RMC73S 2A472JR
R8A1	R447570	47K 1W 5% M01S F
R8A2	J0700063M	47K 1/16W C/FILM 5%
R8A3	J0700063M	47K 1/16W C/FILM 5%
R8A4	J0700072M	220K 1/16W C/FILM 5%
R8A5	J0700054M	10K 1/16W C/FILM 5%
R8A6	J0700049M	4K7 1/16W C/FILM 5%
R8A7	J0700064M	56K 1/16W C/FILM 5%
R8B3	J0113744M	RD14S2H561JB
R8B8	J0700048M	3K9 1/16W C/FILM 5%
R8B9	J0700048M	3K9 1/16W C/FILM 5%
R8C0	J0700048M	3K9 1/16W C/FILM 5%
Z804	T536184	BZX79C 9V1~PHILIPS~
Z805	T536184	BZX79C 9V1~PHILIPS~
Z806	T536184	BZX79C 9V1~PHILIPS~
Z807	T536186	BZX79C 8V2~PHILIPS~

A529360 PARTS LIST

I.D.	Part No.	Description
#15	E573018	FERRITE CLAMP CORE
#200	J3731082	PURSE LOCK
#27	L350016	FERRITE CORE
#270	J2123462M	FERRITE BEADS TYPE B2.3UH
#40	E573018	FERRITE CLAMP CORE
#4069	J3731082	PURSE LOCK
#4070	G864006	CABLE TIE T18R
#500	E573018	FERRITE CLAMP CORE
#5000	N937053	CHASSIS FRAME
#5071	G291311	3X12 BT SCREW (BLACK)
#5072	G291311	3X12 BT SCREW (BLACK)
#5073	G291311	3X12 BT SCREW (BLACK)
#5075	N332067	SPACER
#67	J3731082	PURSE LOCK
#68	J3731082	PURSE LOCK
#802	G864006	CABLE TIE T18R
#E802	JBM00041	FERRITE CORES BP53RB
AV300	JEU00581	PHONO-S/VHS CONNECTOR
B001	PC55002	A20 MAIN PCB BEAB
C001	J0893179R	CKM-104K160B-CNT1608
C002	J0893027R	CKM-104K250B-CNT2125
C003	J0800271R	ELECT CAP 0.1UF 50V SMG
C004	J0800282R	CAP ELECTRO 2.2UF-M 50V
C005	J0800291R	CAP ELEC 10uF 16V SMG
C007	J0800282R	CAP ELECTRO 2.2UF-M 50V
C008	J0800291R	CAP ELEC 10uF 16V SMG
C009	J0800291R	CAP ELEC 10uF 16V SMG
C010	J0893179R	CKM-104K160B-CNT1608
C011	J0893179R	CKM-104K160B-CNT1608
C012	J0893027R	CKM-104K250B-CNT2125
C013	J0227219R	CK73B1H104KR 100N 1206
C014	J0800317R	CP ELECTRO 47UF SMG 16
C015	J0893179R	CKM-104K160B-CNT1608
C016	J0228042R	CC73SCH1H330JR
C017	J0228042R	CC73SCH1H330JR
C019	J0893222R	CKM-103K500B-CNT1608
C020	J0800271R	ELECT CAP 0.1UF 50V SMG
C202	J0800364F	CAP ELECT 1000UF 50V SMG
C203	J0800361F	CAP ELEC 1000UF-M SMG 16V
C204	J0227219R	CK73B1H104KR 100N 1206
C205	J0800317R	CP ELECTRO 47UF SMG 16
C206	J0893044R	CKM 103K500B CNT2125
C208	J0800291R	CAP ELEC 10uF 16V SMG
C209	J0893044R	CKM 103K500B CNT2125
C210	J0893222R	CKM-103K500B-CNT1608
C211	J0893123R	CC73MCH1H560JR
C212	J0893113R	CC73MCH1H100C
C213	J0893044R	CKM 103K500B CNT2125
C215	J0893222R	CKM-103K500B-CNT1608
C220	J0893044R	CKM 103K500B CNT2125
C301	J0800352R	ELEC CAP 470UF 10V SMG
C302	J0227009R	CK73B1H102KR 1N 1206
C303	J0893027R	CKM-104K250B-CNT2125
C304	J0893027R	CKM-104K250B-CNT2125
C305	J0880194R	0.1UF 50V +-5% (100N)
C309	J0800352R	ELEC CAP 470UF 10V SMG
C310	J0893031R	CKM 102K500B CNT2125
C312	J0893179R	CKM-104K160B-CNT1608
C313	J0893027R	CKM-104K250B-CNT2125
C318	J0893027R	CKM-104K250B-CNT2125
C324	J0893179R	CKM-104K160B-CNT1608
C325	J0893179R	CKM-104K160B-CNT1608
C326	J0893179R	CKM-104K160B-CNT1608
C327	J0880194R	0.1UF 50V +-5% (100N)
C328	J0893027R	CKM-104K250B-CNT2125
C329	J0893027R	CKM-104K250B-CNT2125
C331	J0800326R	CEL-101M160WMFT
C332	J0800317R	CP ELECTRO 47UF SMG 16
C345	J0227219R	CK73B1H104KR 100N 1206
C369	J0800326R	CEL-101M160WMFT
C370	J0893027R	CKM-104K250B-CNT2125
C371	J0800326R	CEL-101M160WMFT
C372	J0893027R	CKM-104K250B-CNT2125
C373	J0800326R	CEL-101M160WMFT
C374	J0227219R	CK73B1H104KR 100N 1206
C403	J0893126R	CCM-101J500CHCNT1608
C404	J0800294R	ELECT CAP 10UF 50V SMG
C405	J0893031R	CKM 102K500B CNT2125
C406	J0228054R	CC73SCH1H101JR
C407	J0800294R	ELECT CAP 10UF 50V SMG
C408	J0893031R	CKM 102K500B CNT2125
C410	J0227009R	CK73B1H102KR 1N 1206
C411	J0228054R	CC73SCH1H101JR
C412	J0893031R	CKM 102K500B CNT2125
C413	J0228054R	CC73SCH1H101JR
C414	J0800294R	ELECT CAP 10UF 50V SMG
C415	J0893031R	CKM 102K500B CNT2125
C416	J0800294R	ELECT CAP 10UF 50V SMG
C417	J0893208R	CKM-102K500B-CNT1608
C420	J0800291R	CAP ELEC 10uF 16V SMG
C422	J0893031R	CKM 102K500B CNT2125
C423	J0893027R	CKM-104K250B-CNT2125
C424	J0800291R	CAP ELEC 10uF 16V SMG
C425	J0893027R	CKM-104K250B-CNT2125
C431	J0227449R	CK73B1E334ZR 330N 25V
C432	J0227449R	CK73B1E334ZR 330N 25V
C433	J0227449R	CK73B1E334ZR 330N 25V
C434	J0227449R	CK73B1E334ZR 330N 25V
C438	J0893179R	CKM-104K160B-CNT1608
C439	C353883	GRM40Y5V334Z16PT
C441	J0227449R	CK73B1E334ZR 330N 25V
C442	J0227449R	CK73B1E334ZR 330N 25V
C443	J0893248R	CKM-334Z160B-CNT1608
C444	C353883	GRM40Y5V334Z16PT
C445	C353883	GRM40Y5V334Z16PT
C446	C353883	GRM40Y5V334Z16PT
C447	C353883	GRM40Y5V334Z16PT
C448	C353883	GRM40Y5V334Z16PT
C452	J0893197R	CKM-223K250B-CNT1608
C454	J0893027R	CKM-104K250B-CNT2125

A529360 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
C457	J0796491R	RMC73M-000R	C617	J0227009R	CK73B1H102KR 1N 1206
C461	J0893123R	CC73MCH1H560JR	C620	J0893027R	CKM-104K250B-CNT2125
C462	J0893213R	CC73MCH1H222JR	C621	J0893208R	CKM-102K500B-CNT1608
C463	J0893179R	CKM-104K160B-CNT1608	C639	J0800292R	CAP ELECT 10UF 25V SMG
C465	J0800294R	ELECT CAP 10UF 50V SMG	C644	J0890092R	CAP CERAMIC 0.0022uF 50V
C466	J0800353R	CAP ELECTRO 470UF 16V	C701	J0243507R	CK45B2H331KB
C467	J0800294R	ELECT CAP 10UF 50V SMG	C702	J0257540F	ELEC CAP 4U7 250V
C468	J0893031R	CKM 102K500B CNT2125	C703	C140760	10n 2KV R/EVOX PHE428
C469	J0893179R	CKM-104K160B-CNT1608	C704	JAJ00138F	CC-222K202R-DF 2N2 2KV
C470	J0893179R	CKM-104K160B-CNT1608	C705	J0299993F	CAP 18NF 5% 630V POLY
C471	J0800327R	ELECT CAP 100UF 25V SMG	C706	J0890087R	CAP CERAMIC 1000pf-B 50V
C500	J0893039R	CKM 472K500B CNT 2125	C707	JAJ00134R	CK45-R3DD102K 1N 2KV
C501	J0800279R	ELECT CAP 1.UF 50V	C708	J0244505R	CER CAP 2n2-K 500V
C502	J0195250R	RMC73S 000R	C709	J0253953R	CE04W2C2R2M
C503	J0893044R	CKM 103K500B CNT2125	C710	J0253953R	CE04W2C2R2M
C504	J0800279R	ELECT CAP 1.UF 50V	C711	C353764	&330N MKP379 44334
C506	J0890087R	CAP CERAMIC 1000pf-B 50V	C712	C353764	&330N MKP379 44334
C508	J0893222R	CKM-103K500B-CNT1608	C713	C353764	&330N MKP379 44334
C509	J0893222R	CKM-103K500B-CNT1608	C714	C158764	180N MKP379 44184
C510	J0227436R	0.22U +/-10% 1206 SMT	C715	J0243512R	CK45B2H821KB
C511	J0893206R	680PF +/-10% 0603 SMT	C716	C140707	CAP 10N 365-51103 MULARD
C518U	C150711	CAP 100N 36521104 100V POL	C718	H163021	BTC LINK .6MM DIA WLT0652
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V	C719	J0257540F	ELEC CAP 4U7 250V
C572	J0228066R	GRM40CDG331J50PT	C720	J0880033R	CQM-152K500HFT
C575	J0893027R	CKM-104K250B-CNT2125	C723	H163021	BTC LINK .6MM DIA WLT0652
C576	J0893048R	CKM-223K500B-CNT2125	C724	JAJ00121R	CK45-R3DD101K 100PF 2KV
C577	J0893027R	CKM-104K250B-CNT2125	C726	J0800336R	CAP ELEC 220UF M SMG 25V
C578	J0893027R	CKM-104K250B-CNT2125	C727	J0243507R	CK45B2H331KB
C579	J0893027R	CKM-104K250B-CNT2125	C732	J0800291R	CAP ELEC 10uF 16V SMG
C580	H163021	BTC LINK .6MM DIA WLT0652	C735U	J0880044R	CAP POLYESTER 0.01UF K50V
C581	J0880016R	POLY CAP FLM 0.1UF 50V	C737	C160708	1UF +-10% 250V 368-45105
C582	J0893027R	CKM-104K250B-CNT2125	C740	J0244509R	CER CAP 4700PF-K 500V
C583	J0195250R	RMC73S 000R	C741	J0244509R	CER CAP 4700PF-K 500V
C585	J0800372F	CEL 332 M160WNL SMG 5MM	C742	J0800337R	CEL-221M350WMFT
C586	J0893027R	CKM-104K250B-CNT2125	C743	J0880053R	CQ93M1H473KEB(MF) N/PAN
C588	J0893027R	CKM-104K250B-CNT2125	C747	J0250511R	CAP POLY 0.022UF PHILIPS
C589	J0893039R	CKM 472K500B CNT 2125	C748	JAJ00134R	CK45-R3DD102K 1N 2KV
C590	J0195250R	RMC73S 000R	C749	J0880194R	0.1UF 50V +-5% (100N)
C591	J0195250R	RMC73S 000R	C764	J0800279R	ELECT CAP 1.UF 50V
C592	J0195250R	RMC73S 000R	C769	JAJ00134R	CK45-R3DD102K 1N 2KV
C593	J0800279R	ELECT CAP 1.UF 50V	C770	J0800292R	CAP ELECT 10UF 25V SMG
C594	J0228038R	CC73SCH1H220JR	C900	C150763	&100NF 20% X2 275V BEABT
C595	J0228038R	CC73SCH1H220JR	C901	J0262774N	0.22UF 250VAC X2 ~BEABT
C596	J0893027R	CKM-104K250B-CNT2125	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
C597	J0800372F	CEL 332 M160WNL SMG 5MM	C903	J0890083R	CK45 B1H471KB
C598	C457884	&GRM40X7R474K25PT 470N	C904	C648763	&68NF 20% X2 275V BEABT
C599	J0893035R	CKM--222K500B CNT2125	C905	C001561	ELECT CAP 100UF 250V
C602	J0800337R	CEL-221M350WMFT	C908	J0800329R	ELECT CAP 100UF 50V SMG
C603	J0800329R	ELECT CAP 100UF 50V SMG	C909	J0800352R	ELEC CAP 470UF 10V SMG
C604	J0880044R	CAP POLYESTER 0.01UF K50V	C910	J0880044R	CAP POLYESTER 0.01UF K50V
C605	C150711	CAP 100N 36521104 100V POL	C911	J0800328R	CEL-101M350WMFT
C606	J0893027R	CKM-104K250B-CNT2125	C912	J0244505R	CER CAP 2n2-K 500V
C607	J0893027R	CKM-104K250B-CNT2125	C913	J0800327R	ELECT CAP 100UF 25V SMG
C610	J0890092R	CAP CERAMIC 0.0022uF 50V	C914	C005046	ELECT 1000UF 25V LXY
C616	J0800339F	CAP ELECT 220UF 63V	C915	J0800354R	470UF 25V SMG

A529360 PARTS LIST

I.D.	Part No.	Description
C916	C005046	ELECT 1000UF 25V LXY
C917	J0880048R	CQT223K50MB (PANASONIC)
C918	C001561	ELECT CAP 100UF 250V
C919	J0890078R	CK45B1H221KB (MURATA)
C920	C001561	ELECT CAP 100UF 250V
C921	C001561	ELECT CAP 100UF 250V
C922	J0880037R	CQM332K500HFT
C923	J0880037R	CQM332K500HFT
C924	J0800294R	ELECT CAP 10UF 50V SMG
C925	JAJ00121R	CK45-R3DD101K 100PF 2KV
C926	JAJ00127R	CK45-R3DD 331K
C927	JAJ00121R	CK45-R3DD101K 100PF 2KV
C929	J0800327R	ELECT CAP 100UF 25V SMG
C931	JAJ00138F	CC-222K202R-DF 2N2 2KV
C932	J0880037R	CQM332K500HFT
C933	J0253491F	ELEC CAP 100UF 200V
C936	J0880051R	CQ93M1H333KEB PANASONIC
C942	J0880042R	CQ93M1H682KEB(MF) N/PAN
C950	J0259431F	ELEC CAP 220UF 200V
C951	J0800362F	CAP ELECT 1000UF 25V SMG
C952	J0800362F	CAP ELECT 1000UF 25V SMG
C953	J0243509R	CERAMIC CAP 470p 500V
C954	J0243509R	CERAMIC CAP 470p 500V
C955	JAJ00129R	CK45-R3DD 471K
C957	J0243509R	CERAMIC CAP 470p 500V
C959	J0800353R	CAP ELECTRO 470UF 16V
C960	J0244501R	CER CAP 1000PF-K 500V
C961	J0244501R	CER CAP 1000PF-K 500V
C962	J0244501R	CER CAP 1000PF-K 500V
C963	J0244501R	CER CAP 1000PF-K 500V
C964	J0243511R	CER CAP 680PF-K 500V
C967	J0243509R	CERAMIC CAP 470p 500V
C970	J0800345R	ELECT CAP 330UF 25V SMG
C971	J0880044R	CAP POLYESTER 0.01UF K50V
C977	J0243509R	CERAMIC CAP 470p 500V
C986	J0800328R	CEL-101M350WMFT
C987	J0800352R	ELEC CAP 470UF 10V SMG
C990	J0880048R	CQT223K50MB (PANASONIC)
C991	E884110	SPARK GAP 10N 2KV SDUK 16
C992	J0880044R	CAP POLYESTER 0.01UF K50V
C993	C150891	100N 500V CAP
C994	J0800327R	ELECT CAP 100UF 25V SMG
C995	J0880037R	CQM332K500HFT
C997	J0880031R	CQ93M1H102KEB (MF) N/PAN
C999	C232753	2N2 4KVAC PME294 UL BEABT
CA01U	J0880198R	POLY CAP 0.22UF-J 50V
CA02U	J0880198R	POLY CAP 0.22UF-J 50V
CA03	J0880198R	POLY CAP 0.22UF-J 50V
CA04	J0893031R	CKM 102K500B CNT2125
CA05	J0893031R	CKM 102K500B CNT2125
CA06	J0893118R	CCM-270J500CHCNT1608
CA07	C001550	4700UF 25V SMG S/LEG
CA08	J0893135R	CC73MCH1H471JR 1608
CA09	J0893179R	CKM-104K160B-CNT1608
CA10	J0893133R	CC73MCH1H331JR
CA11	J0893135R	CC73MCH1H471JR 1608
CA12	J0893135R	CC73MCH1H471JR 1608
CA13	J0284623R	CEL-1R0M500WMFT(BP)E
CA14	C001550	4700UF 25V SMG S/LEG
CA15	C343882	GRM40X7R333K50-550
CA16	J0880198R	POLY CAP 0.22UF-J 50V
CA17	J0893208R	CKM-102K500B-CNT1608
CA18	J0893208R	CKM-102K500B-CNT1608
CA20	J0893027R	CKM-104K250B-CNT2125
CA21	J0228070R	MINI CHIP 470PF-J CH 50V
CA22	J0893133R	CC73MCH1H331JR
CA24	J0893027R	CKM-104K250B-CNT2125
CA25	J0880064R	CQM - 334J500HFT
CA27	J0893031R	CKM 102K500B CNT2125
CA28	J0284623R	CEL-1R0M500WMFT(BP)E
CA29	C343882	GRM40X7R333K50-550
CA30	J0893208R	CKM-102K500B-CNT1608
CA31	J0800291R	CAP ELEC 10uF 16V SMG
CA32	J0893179R	CKM-104K160B-CNT1608
CA33	J0893179R	CKM-104K160B-CNT1608
CA34	J0893222R	CKM-103K500B-CNT1608
CA35	J0800316R	47u 10V ELECT CAP SMG
CA36	J0800316R	47u 10V ELECT CAP SMG
CA37	J0800325R	CEL-101M100WMFT
CA38	J0800325R	CEL-101M100WMFT
CA39	J0893219R	CCM-682K500B-CNT1608
CA40	J0893042R	CKM 682K500B CNT2125
CA41	J0800325R	CEL-101M100WMFT
CA42	J0284623R	CEL-1R0M500WMFT(BP)E
CA44	J0284623R	CEL-1R0M500WMFT(BP)E
COVER	N332053	COVER
CS10B	JAA00381R	10UF 6.3V SMT 3216
CS11	J0228054R	CC73SCH1H101JR
CS12	J0893126R	CCM-101J500CHCNT1608
CS20	J0800326R	CEL-101M160WMFT
CS23B	JAA00381R	10UF 6.3V SMT 3216
CS24	J0893126R	CCM-101J500CHCNT1608
CS25	J0893126R	CCM-101J500CHCNT1608
CS31	J0893126R	CCM-101J500CHCNT1608
CS32	J0893126R	CCM-101J500CHCNT1608
CS33B	JAA00381R	10UF 6.3V SMT 3216
CS40B	JAA00381R	10UF 6.3V SMT 3216
CS44	J0893126R	CCM-101J500CHCNT1608
CS45	J0893126R	CCM-101J500CHCNT1608
CS51	J0893126R	CCM-101J500CHCNT1608
CS52	J0228054R	CC73SCH1H101JR
CS53B	JAA00381R	10UF 6.3V SMT 3216
CS60B	JAA00381R	10UF 6.3V SMT 3216
CS62	J0893126R	CCM-101J500CHCNT1608
CS63	J0893126R	CCM-101J500CHCNT1608
CS91	J0796491R	RMC73M-000R
CU01	J0800359R	CEL-102M100WMFT
D001	T531069	SHOTTKY 30V/200mA/BAT254
D002	T531067	DIODE BAS216 S/MOUNT
D003	T531067	DIODE BAS216 S/MOUNT

A529360 PARTS LIST

I.D.	Part No.	Description
D004	T531069	SHOTTKY 30V/200mA/BAT254
D006	T531069	SHOTTKY 30V/200mA/BAT254
D007	T531069	SHOTTKY 30V/200mA/BAT254
D008	T531069	SHOTTKY 30V/200mA/BAT254
D009	T531069	SHOTTKY 30V/200mA/BAT254
D011	J2343963M	MPG06J (TAPE) GI
D015	T531067	DIODE BAS216 S/MOUNT
D016	T531069	SHOTTKY 30V/200mA/BAT254
D017	T531069	SHOTTKY 30V/200mA/BAT254
D018	T531069	SHOTTKY 30V/200mA/BAT254
D206	T531067	DIODE BAS216 S/MOUNT
D208	T531067	DIODE BAS216 S/MOUNT
D209	T531067	DIODE BAS216 S/MOUNT
D301	T531068	DIODE MA723/TP PANASONIC
D501	T531067	DIODE BAS216 S/MOUNT
D502	T531056	DIODE BYV10-40 ~MULLARD
D503	T531056	DIODE BYV10-40 ~MULLARD
D507	T531067	DIODE BAS216 S/MOUNT
D508	J2348921M	DIODE 1N4531
D522	T531068	DIODE MA723/TP PANASONIC
D523	T531069	SHOTTKY 30V/200mA/BAT254
D601	J2348921M	DIODE 1N4531
D603	T531067	DIODE BAS216 S/MOUNT
D604	T431113	DIODE BYD33J MULL BEAB
D607	T531053	DIODE IN4148 MULL/PHIL/ITT
D608	T531053	DIODE IN4148 MULL/PHIL/ITT
D610	T431113	DIODE BYD33J MULL BEAB
D611	T431113	DIODE BYD33J MULL BEAB
D622	J2343962M	MPG06G
D645	T536259	BZX79C56V
D701	T431113	DIODE BYD33J MULL BEAB
D702	T431113	DIODE BYD33J MULL BEAB
D703	J2343941M	RGP10G
D706	T431117F	DIODE BY228 P/F PHILIPS
D707	T531086F	BYW96E
D708	J2336612	RU3AM
D711	T531086F	BYW96E
D713	T431113	DIODE BYD33J MULL BEAB
D714	T431113	DIODE BYD33J MULL BEAB
D715	J2348921M	DIODE 1N4531
D716	J2348921M	DIODE 1N4531
D735	T431113	DIODE BYD33J MULL BEAB
D739	J2348921M	DIODE 1N4531
D745	J2348921M	DIODE 1N4531
D904	J2348921M	DIODE 1N4531
D905	T431113	DIODE BYD33J MULL BEAB
D906	T431113	DIODE BYD33J MULL BEAB
D907	T531055	DIODE BAT85 SCHOTTKY MULL
D910	J2348921M	DIODE 1N4531
D911	J2348921M	DIODE 1N4531
D912	H163021	BTC LINK .6MM DIA WLT0652
D913	J2348921M	DIODE 1N4531
D914	J2348921M	DIODE 1N4531
D915	T431113	DIODE BYD33J MULL BEAB
D916	T431113	DIODE BYD33J MULL BEAB
D919	T531086F	BYW96E
D920	J2342711M	DIODE EM2A (SANKEN)
D921	J2342711M	DIODE EM2A (SANKEN)
D922	J2342711M	DIODE EM2A (SANKEN)
D923	J2342711M	DIODE EM2A (SANKEN)
D924	J2342711M	DIODE EM2A (SANKEN)
D925	T431122	DIODE BYV28-200~PHILIPS~
D927	J2348921M	DIODE 1N4531
D931	J2342711M	DIODE EM2A (SANKEN)
D933	T536259	BZX79C56V
D934	T431114	& BYD33M
D939	T431113	DIODE BYD33J MULL BEAB
D953	T431145	BYW29E-200
D953A	H224075	H/SINK F9-4-220 &TAG COL
D955	T431127	BYR29F-700
D955A	H235369	FI2-32-2LA-2 HEATSINK
D955B	G291023	M2.5x8 TAPTITE SCREW
D955C	G560333	M2.5 SPRING WASHER
D960	J2342711M	DIODE EM2A (SANKEN)
D961	J2342711M	DIODE EM2A (SANKEN)
D962	J2342711M	DIODE EM2A (SANKEN)
D963	J2342711M	DIODE EM2A (SANKEN)
D970	T431113	DIODE BYD33J MULL BEAB
D977	T431122	DIODE BYV28-200~PHILIPS~
D982	J2348921M	DIODE 1N4531
D984	T531053	DIODE IN4148 MULL/PHIL/ITT
D991	T431113	DIODE BYD33J MULL BEAB
D992	T431120	DIODE BYV27-150 ~MULLARD~
D994	T531055	DIODE BAT85 SCHOTTKY MULL
D995	T531053	DIODE IN4148 MULL/PHIL/ITT
D996	J2348921M	DIODE 1N4531
D997U	J2348921M	DIODE 1N4531
DA01	T531067	DIODE BAS216 S/MOUNT
DA02	J2348921M	DIODE 1N4531
DA03	T531067	DIODE BAS216 S/MOUNT
DS14	T531067	DIODE BAS216 S/MOUNT
DS25	T531067	DIODE BAS216 S/MOUNT
DS31	T531067	DIODE BAS216 S/MOUNT
DS42	T531067	DIODE BAS216 S/MOUNT
DS51	T531067	DIODE BAS216 S/MOUNT
DS60	T531067	DIODE BAS216 S/MOUNT
E002	E843366	OSD SHIELDED LEAD
E006	E843377	LEAD ASSY 7 WAY 320MM
E04	E843369	SPEAKER LEAD
E10	E846825	A5 SCREEN LD 2PIN EHUK
E1015	E843304	4 WAY LD 430mm(PS06/E413)
E20	E843353	2 WAY SHIELDED LEAD 330MM
E206	E843314	CPT EARTH LEAD
E207	E843314	CPT EARTH LEAD
E208	E843286	GROUND LEAD FEMALE
E30	E846825	A5 SCREEN LD 2PIN EHUK
E500	E843376	OSD SHIELDED LEAD
E601	J2661752	3P PLUG PIN/BASE UL BEAB
E802	E843351	A20 8 WAY CRT BASE LEAD
E803	E846902	A7 CRT BASE LEAD 550mm

A529360 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
F501	J2142243	CERAMIC TRAP 5.5MHZ	K157	J0195248R	RMC73--000R
F900	J2722446	FUS-4A T4AH 250V BEABT	K16	J0195250R	RMC73S 000R
F900A	J2721792	FUSE HOLDER UL/BEAB	K161	J0195248R	RMC73--000R
F901	E882359	FUSE GLASS T2.0AL BEABT	K165	J0195248R	RMC73--000R
F901A	J2721792	FUSE HOLDER UL/BEAB	K166	J0796491R	RMC73M-000R
HS01	E826160	H/P SKT HSJ3000-01-010	K167	J0195250R	RMC73S 000R
I001	T900956	LE33CZ TO92	K168	J0195250R	RMC73S 000R
I003	E730301	IC M15_IF2	K170	J0796491R	RMC73M-000R
I003A	E823935	52WAY IC SKT ~ FELCO	K171	J0195248R	RMC73--000R
I004	T900779	74HC595	K175	J0195250R	RMC73S 000R
I006	T900989	M24C16-W SMT	K176	J0195250R	RMC73S 000R
I007	T900980	M62703ML	K182	J0796491R	RMC73M-000R
I302	T900762	IC 4053 SO16N	K183	J0796491R	RMC73M-000R
I303	T900762	IC 4053 SO16N	K189	J0796491R	RMC73M-000R
I304	T900762	IC 4053 SO16N	K192	J0796491R	RMC73M-000R
I401A	E823933	*64 PIN SKT 1179976441005	K197	J0195248R	RMC73--000R
I402	T900902	OP AMPS NJM3403 SMT	K198	J0195248R	RMC73--000R
I403	T900960	NJM3404	K199	J0195250R	RMC73S 000R
I501	T900959	TDA8879	K20	J0195250R	RMC73S 000R
I601	T900951	TDA8358J	K200	J0195248R	RMC73--000R
I601A	H235475	HEATSINK A20	K202	J0195250R	RMC73S 000R
I601B	G884020	SPRING CLIP 56379-MULLARD	K203	J0195248R	RMC73--000R
I601C	B976404	HEAT SINK COMPOUND 340	K206	J0796491R	RMC73M-000R
I900	T900452	UC3844 SGS/UNITRODE	K216	J0796491R	RMC73M-000R
I902	T900815	& UC3843N SGS	K220	J0796491R	RMC73M-000R
I903	T901000	L78M05CV 500MA REGULATOR	K225	J0195248R	RMC73--000R
I903A	H224085	F9-4-220D-2LS	K231	J0195248R	RMC73--000R
I904	T900345	REG 7805 SGS/MOTO/NEC	K233	J0195250R	RMC73S 000R
I904A	G884023	SPRING CLIP	K236	J0195250R	RMC73S 000R
I905	T900963	IC VIPER 20	K237	J0195250R	RMC73S 000R
I905A	H224085	F9-4-220D-2LS	K240	J0195250R	RMC73S 000R
I943	T900796	&TL431CZ-AP SGS	K241	J0195250R	RMC73S 000R
I964	T548013	CNY17F1/6 SIEMENS BEABT	K242	J0195250R	RMC73S 000R
I997	T548016	PC817B OPTO BEAB	K243	J0195250R	RMC73S 000R
I998	T548016	PC817B OPTO BEAB	K25	J0195248R	RMC73--000R
I999	T548013	CNY17F1/6 SIEMENS BEABT	K262	J0195250R	RMC73S 000R
IA01	T900955	TDA7490L	K266	J0195250R	RMC73S 000R
IA04	T900978	TDA2822D SO8	K267	J0796491R	RMC73M-000R
IR01	T549018	& IR REC TSOP2838UH1 TEMIC	K271	J0796491R	RMC73M-000R
K118	J0796491R	RMC73M-000R	K288	J0195248R	RMC73--000R
K12	J0195250R	RMC73S 000R	K289	J0796491R	RMC73M-000R
K120	J0195248R	RMC73--000R	K293	J0195248R	RMC73--000R
K121	J0195248R	RMC73--000R	K299	J0796491R	RMC73M-000R
K126	J0796491R	RMC73M-000R	K300	J0195250R	RMC73S 000R
K129	J0195250R	RMC73S 000R	K303	J0195250R	RMC73S 000R
K132	J0195248R	RMC73--000R	K310	J0195250R	RMC73S 000R
K133	J0796491R	RMC73M-000R	K333	J0796491R	RMC73M-000R
K135	J0195248R	RMC73--000R	K341	J0195248R	RMC73--000R
K136	J0195248R	RMC73--000R	K343	J0195248R	RMC73--000R
K137	J0796491R	RMC73M-000R	K345	J0796491R	RMC73M-000R
K139	J0195248R	RMC73--000R	K346	J0796491R	RMC73M-000R
K141	J0195250R	RMC73S 000R	K350	J0195248R	RMC73--000R
K142	J0195250R	RMC73S 000R	K39	J0195250R	RMC73S 000R
K146	J0195248R	RMC73--000R	K405	J0796491R	RMC73M-000R
K152	J0195250R	RMC73S 000R	K504	J0195250R	RMC73S 000R

A529360 PARTS LIST

I.D.	Part No.	Description
K510	J0796491R	RMC73M-000R
K512	J0195248R	RMC73--000R
K513	J0796491R	RMC73M-000R
K64	J0195250R	RMC73S 000R
K66	J0195248R	RMC73--000R
K67	J0195248R	RMC73--000R
K68	J0796491R	RMC73M-000R
K84	J0195248R	RMC73--000R
K85	J0195250R	RMC73S 000R
K86	J0195250R	RMC73S 000R
K87	A306099	BRACKET ASSEMBLY
K88	J0195248R	RMC73--000R
KVR900	W024001	0.56ML SFT TIN'D COP WIRE
L001	J2122943M	AXIAL COIL 10UH-J
L002	J2122943M	AXIAL COIL 10UH-J
L003	J2122943M	AXIAL COIL 10UH-J
L200	J0195250R	RMC73S 000R
L201	J0195250R	RMC73S 000R
L202	J0195250R	RMC73S 000R
L203	J0195250R	RMC73S 000R
L204	J0195250R	RMC73S 000R
L205	J0195250R	RMC73S 000R
L208	J0195250R	RMC73S 000R
L210	J0195250R	RMC73S 000R
L256	J2123781R	FILTER COIL EL101K
L309	L420187	BLM11A102S
L310	L420187	BLM11A102S
L311	J0796491R	RMC73M-000R
L312	J0195250R	RMC73S 000R
L313	J0796491R	RMC73M-000R
L314	J0796491R	RMC73M-000R
L315	J0796491R	RMC73M-000R
L317	J0796491R	RMC73M-000R
L318	J0796491R	RMC73M-000R
L330	J2122956M	COIL LAL 100UH K
L331	J0796491R	RMC73M-000R
L333	L420187	BLM11A102S
L334	L420187	BLM11A102S
L335	J0195250R	RMC73S 000R
L336	J0796491R	RMC73M-000R
L337	J0796491R	RMC73M-000R
L338	J0796491R	RMC73M-000R
L340	J0796491R	RMC73M-000R
L341	J0796491R	RMC73M-000R
L348	J0796491R	RMC73M-000R
L349	J2123781R	FILTER COIL EL101K
L350	J2123781R	FILTER COIL EL101K
L351	J2123781R	FILTER COIL EL101K
L358	J0796491R	RMC73M-000R
L400	J2123781R	FILTER COIL EL101K
L419	L420187	BLM11A102S
L420	J2122943M	AXIAL COIL 10UH-J
L422	L420187	BLM11A102S
L423	J2122943M	AXIAL COIL 10UH-J
L442	H163021	BTC LINK .6MM DIA WLT0652
L443	L420187	BLM11A102S
L444	J2122943M	AXIAL COIL 10UH-J
L446	L420187	BLM11A102S
L447	J2122943M	AXIAL COIL 10UH-J
L451	J2122253M	AXIAL COIL 100uH K TAPE
L452	J2122253M	AXIAL COIL 100uH K TAPE
L453	J2122253M	AXIAL COIL 100uH K TAPE
L540	J2123781R	FILTER COIL EL101K
L552	J2122943M	AXIAL COIL 10UH-J
L553	J2123781R	FILTER COIL EL101K
L601	J2123462M	FERRITE BEADS TYPE B2.3UH
L602	L300002	RL8010-100J-UL-HUK-B06
L604	L300002	RL8010-100J-UL-HUK-B06
L700	JBH00039	HC-820KS1 (LHL10)
L701	J2123461M	FERRITE BEAD 0.8uH
L702	L380178	LIN COIL ISKRA
L704	J2123461M	FERRITE BEAD 0.8uH
L705	J2123462M	FERRITE BEADS TYPE B2.3UH
L711	H163021	BTC LINK .6MM DIA WLT0652
L751	L380117	BRIDGE COIL 5MH
L752	L380147	&BRIDGE COIL
L900	L210068	M/FILTER 97192 RIFA BEAB
L901	L210068	M/FILTER 97192 RIFA BEAB
L902	J2123462M	FERRITE BEADS TYPE B2.3UH
L903	J2123462M	FERRITE BEADS TYPE B2.3UH
L904	J2125579	CHOKE COIL 47UH
L905	J2123462M	FERRITE BEADS TYPE B2.3UH
L909	J2123462M	FERRITE BEADS TYPE B2.3UH
L911	L300005	RL8010-180J-UL-HUK-B06
L921	J2123462M	FERRITE BEADS TYPE B2.3UH
L931	J2123462M	FERRITE BEADS TYPE B2.3UH
L932	J2123462M	FERRITE BEADS TYPE B2.3UH
L935	J2123462M	FERRITE BEADS TYPE B2.3UH
L939	J2123462M	FERRITE BEADS TYPE B2.3UH
L955	J2123462M	FERRITE BEADS TYPE B2.3UH
L957	J2123462M	FERRITE BEADS TYPE B2.3UH
L961	L380184	BUCK COIL E20/10/5
L965	J2123462M	FERRITE BEADS TYPE B2.3UH
L992	J2123462M	FERRITE BEADS TYPE B2.3UH
LA01	JBH00034	HC-330K SI LH10TK
LA02	L380176	33UH PANASONIC ELC12E330
LA03	JBH00034	HC-330K SI LH10TK
LA04	L380176	33UH PANASONIC ELC12E330
LED2	T547049	SLR-325VC LED RED
LS04	J2123103M	LAL 02 AXIAL COIL 10uH
LS201	J2122956M	COIL LAL 100UH K
LS25	J2123103M	LAL 02 AXIAL COIL 10uH
LS31	J2123103M	LAL 02 AXIAL COIL 10uH
LS42	J2123103M	LAL 02 AXIAL COIL 10uH
LS50	J2123103M	LAL 02 AXIAL COIL 10uH
LS60	J2123103M	LAL 02 AXIAL COIL 10uH
P001	J2902261	PLG-02P2R5VPWB
P10	J2902261	PLG-02P2R5VPWB
P1015	J2902263	PLG-04P2R5VPWB
P302	J2902261	PLG-02P2R5VPWB

A529360 PARTS LIST

I.D.	Part No.	Description
P303	J2902261	PLG-02P2R5VPWB
P400	J2902261	PLG-02P2R5VPWB
P701	J2661753	4 PIN PLUG WITH BASE
P802	J2902267	PLG-08P2R5V PWB
P803	J2902264	PLG-05P 2R5V PWB
P9	J2902261	PLG-02P2R5VPWB
P900	E825259	2 WAY MAIN HEADER UL BEAB
P902	J2661751	2P PIN PLUG & BASE
PA04	J2902263	PLG-04P2R5VPWB
PHONO1	E826943	QUAD PHONO SKT
PHONO2	E826944	QUAD PHONO SKT
PS01	J2902261	PLG-02P2R5VPWB
Q002	T633153	2N7002 MOSFET
Q003	J2325691R	TRS 2SC2412K T146Q/R
Q004	J2325691R	TRS 2SC2412K T146Q/R
Q005	T633153	2N7002 MOSFET
Q006	J2325691R	TRS 2SC2412K T146Q/R
Q007	J2325691R	TRS 2SC2412K T146Q/R
Q008	J2325691R	TRS 2SC2412K T146Q/R
Q011	J2325691R	TRS 2SC2412K T146Q/R
Q200	J2325691R	TRS 2SC2412K T146Q/R
Q212	T631302	& DTC114YKAT146
Q213	T631302	& DTC114YKAT146
Q214	T631302	& DTC114YKAT146
Q215	T631302	& DTC114YKAT146
Q216	J2328161R	TRS 2SC4265JC02TR
Q217	J2325691R	TRS 2SC2412K T146Q/R
Q330	J2325781R	TRS 2SA1037K T146Q/R
Q332A	J2325781R	TRS 2SA1037K T146Q/R
Q400	J2325691R	TRS 2SC2412K T146Q/R
Q401	J2325691R	TRS 2SC2412K T146Q/R
Q402	J2325691R	TRS 2SC2412K T146Q/R
Q403	J2325691R	TRS 2SC2412K T146Q/R
Q412	J2325781R	TRS 2SA1037K T146Q/R
Q413	J2316691R	STC-DTC144EK T146
Q501	J2325781R	TRS 2SA1037K T146Q/R
Q505	J2325781R	TRS 2SA1037K T146Q/R
Q507	J2325691R	TRS 2SC2412K T146Q/R
Q508	J2325691R	TRS 2SC2412K T146Q/R
Q509	J2325781R	TRS 2SA1037K T146Q/R
Q605	J2325691R	TRS 2SC2412K T146Q/R
Q606	J2325781R	TRS 2SA1037K T146Q/R
Q631	T636077	&IRFS530A ISOL SAMSUNG
Q631A	G884023	SPRING CLIP
Q701	T633137	TRANS BF459 MULLARD/SES
Q702	T732016	P0109DA THYRISTOR SGS
Q711	J2325781R	TRS 2SA1037K T146Q/R
Q751	J2315451	TRS-BU2508AF
Q751A	G884020	SPRING CLIP 56379-MULLARD
Q777	J2315891R	TRS JC548B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235418	POWER HEATSINK(TERNEX)
Q903B	G884020	SPRING CLIP 56379-MULLARD
Q903C	B976404	HEAT SINK COMPOUND 340
Q904	T636077	&IRFS530A ISOL SAMSUNG
Q911	T636077	&IRFS530A ISOL SAMSUNG
Q912	T631309	TRANS BC557B BANDED
Q913	T633133	TRANS BF422 BAND MULL/AEG
Q919	J2315921R	TRS JC558B
Q922	J2315891R	TRS JC548B
Q923	T900796	&TL431CZ-AP SGS
Q927	T636094	MOSFET IRF640
Q927A	H224085	F9-4-220D-2LS
Q929	W024001	0.56ML SFT TIN'D COP WIRE
Q932	T633133	TRANS BF422 BAND MULL/AEG
Q951	J2315891R	TRS JC548B
Q964	T900473	SHUNT REG TL431CLP MOT/TEX
QA01	J2325691R	TRS 2SC2412K T146Q/R
QS11	J2325691R	TRS 2SC2412K T146Q/R
QS17	J2325781R	TRS 2SA1037K T146Q/R
QS20	J2325691R	TRS 2SC2412K T146Q/R
QS29	J2325781R	TRS 2SA1037K T146Q/R
QS31	J2325781R	TRS 2SA1037K T146Q/R
QS32	J2325691R	TRS 2SC2412K T146Q/R
QS40	J2325691R	TRS 2SC2412K T146Q/R
QS44	J2325781R	TRS 2SA1037K T146Q/R
QS51	J2325781R	TRS 2SA1037K T146Q/R
QS52	J2325691R	TRS 2SC2412K T146Q/R
QS60	J2325691R	TRS 2SC2412K T146Q/R
QS61	J2325781R	TRS 2SA1037K T146Q/R
R001	J0196093R	RMC73M-1F103JR
R002	J0196043R	RMC73M-1F101JR
R004	J0196093R	RMC73M-1F103JR
R005	J0196043R	RMC73M-1F101JR
R006	J0195883R	RMC73S 2A221JR
R007	J0195001R	RMC73 2B101JR
R008	J0196093R	RMC73M-1F103JR
R009	J0196093R	RMC73M-1F103JR
R010	J0196093R	RMC73M-1F103JR
R011	J0196093R	RMC73M-1F103JR
R012	J0196093R	RMC73M-1F103JR
R013	J0196043R	RMC73M-1F101JR
R014	J0196043R	RMC73M-1F101JR
R015	J0196043R	RMC73M-1F101JR
R016	J0196043R	RMC73M-1F101JR
R017	J0196093R	RMC73M-1F103JR
R018	J0196093R	RMC73M-1F103JR
R019	J0196086R	RMC73M-1F562JR
R020	J0196093R	RMC73M-1F103JR
R021	J0196068R	RMC73M-1F102JR
R022	J0196068R	RMC73M-1F102JR
R023	J0196068R	RMC73M-1F102JR
R024	J0195927R	RMC73S 2A123JR
R025	J0196095R	RMC73M - 1F123JR
R026	J0195032R	RMC73--2B393JR 1%
R027	J0196095R	RMC73M - 1F123JR
R028	J0195927R	RMC73S 2A123JR
R029	J0195933R	RMC73S 2A223JR
R030	J0195939R	RMC73S2A393JR
R031	J0195933R	RMC73S 2A223JR

A529360 PARTS LIST

I.D.	Part No.	Description
R032	J0700054M	10K 1/16W C/FILM 5%
R033	J0196093R	RMC73M-1F103JR
R036	J0700054M	10K 1/16W C/FILM 5%
R037	J0195025R	RMC73 - 2B103JR
R038	J0196093R	RMC73M-1F103JR
R039	J0700049M	4K7 1/16W C/FILM 5%
R040	J0700041M	1K 1/16W C/FILM 5%
R041	J0700041M	1K 1/16W C/FILM 5%
R042	J0195875R	RMC73S 2A101JR
R043	J0700027M	100R 1/16W C/FILM 5%
R044	J0700027M	100R 1/16W C/FILM 5%
R045	J0196043R	RMC73M-1F101JR
R046	J0700027M	100R 1/16W C/FILM 5%
R047	J0196051R	RMC73M-1F221JR
R048U	J0700027M	100R 1/16W C/FILM 5%
R052	J0195875R	RMC73S 2A101JR
R053	J0196043R	RMC73M-1F101JR
R054	J0195013R	RMC73 2B102JR
R055	J0195013R	RMC73 2B102JR
R056	J0195013R	RMC73 2B102JR
R057	J0196093R	RMC73M-1F103JR
R058	J0196093R	RMC73M-1F103JR
R059	J0196093R	RMC73M-1F103JR
R060	J0196093R	RMC73M-1F103JR
R061	J0196093R	RMC73M-1F103JR
R062	J0196093R	RMC73M-1F103JR
R063	J0196043R	RMC73M-1F101JR
R064	J0196093R	RMC73M-1F103JR
R065	J0196043R	RMC73M-1F101JR
R066	J0195894R	RMC73S2A621JR 620R
R067	J0196093R	RMC73M-1F103JR
R070	J0196093R	RMC73M-1F103JR
R071	J0196093R	RMC73M-1F103JR
R074	J0195925R	RMC73S 2A103JR
R075	J0195941R	RMC73S 2A473JR
R078	J0196093R	RMC73M-1F103JR
R079	J0196043R	RMC73M-1F101JR
R080	J0196043R	RMC73M-1F101JR
R081	J0196053R	RMC73M - 1F271JR
R082	J0196093R	RMC73M-1F103JR
R083	J0196043R	RMC73M-1F101JR
R084	J0196043R	RMC73M-1F101JR
R085	J0195875R	RMC73S 2A101JR
R090	J0700027M	100R 1/16W C/FILM 5%
R091	J0196043R	RMC73M-1F101JR
R092	J0196078R	RMC73M-1F272JR
R093	J0196043R	RMC73M-1F101JR
R094	J0196043R	RMC73M-1F101JR
R095	J0196043R	RMC73M-1F101JR
R096	J0196043R	RMC73M-1F101JR
R097	J0700027M	100R 1/16W C/FILM 5%
R098	R120330	100R 1/4W DRG NO
R099	J0196043R	RMC73M-1F101JR
R230	J0195918R	RMC73S 2A562JR
R257	J0700027M	100R 1/16W C/FILM 5%
R258	J0700027M	100R 1/16W C/FILM 5%
R259	J0195900R	RMC73S 2A102JR
R261	J0195250R	RMC73S 000R
R263	J0195885R	RMC73S 2A271JR
R264	J0195918R	RMC73S 2A562JR
R265	J0700038M	680R 1/16W C/FILM 5%
R266	J0196078R	RMC73M-1F272JR
R267	J0195018R	RMC73 2B272JR
R268	J0195910R	RMC73S-2A272JR
R269	J0195250R	RMC73S 000R
R270	J0195250R	RMC73S 000R
R271	J0195875R	RMC73S 2A101JR
R272	J0195920R	RMC73S 2A682JR
R273	J0196070R	RMC73M - 1F122JR
R274	J0196043R	RMC73M-1F101JR
R275	J0195893R	RMC73S 2A561JR
R276	J0195001R	RMC73 2B101JR
R277	J0195895R	RMC73S 2A681JR
R281	J0195885R	RMC73S 2A271JR
R282	J0195931R	RMC73S 2A183JR
R300	J0195943R	RMC73S-2A563JR
R303	J0195871R	RMC73S 2A750JR
R305	J0195871R	RMC73S 2A750JR
R306	J0195871R	RMC73S 2A750JR
R307	J0195875R	RMC73S 2A101JR
R309	J0195868R	RM73S 2A560JR 56R
R311	J0195871R	RMC73S 2A750JR
R314	J0195950R	RMC73S 2A104JR
R315	J0196093R	RMC73M-1F103JR
R317	J0195016R	RMC73--2B182JR 1K8 1206
R319	J0195001R	RMC73 2B101JR
R320	J0195871R	RMC73S 2A750JR
R321	J0196043R	RMC73M-1F101JR
R322	J0196043R	RMC73M-1F101JR
R323	J0195871R	RMC73S 2A750JR
R326	J0195871R	RMC73S 2A750JR
R330	J0195871R	RMC73S 2A750JR
R331	J0196043R	RMC73M-1F101JR
R332	J0195950R	RMC73S 2A104JR
R333	J0196043R	RMC73M-1F101JR
R334	J0195868R	RM73S 2A560JR 56R
R335	J0195871R	RMC73S 2A750JR
R336	J0196043R	RMC73M-1F101JR
R337	J0196043R	RMC73M-1F101JR
R338	J0195875R	RMC73S 2A101JR
R339	J0113722M	RDO5S2H750JB
R340	J0195875R	RMC73S 2A101JR
R342	J0195925R	RMC73S 2A103JR
R344	J0195906R	RMC73S--2A182JR
R346	J0700027M	100R 1/16W C/FILM 5%
R347	J0195001R	RMC73 2B101JR
R349	J0195875R	RMC73S 2A101JR
R350	J0195943R	RMC73S-2A563JR
R351	J0195895R	RMC73S 2A681JR
R352	J0196111R	RMC73M - 1F563JR

A529360 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
R353	J0195871R	RMC73S 2A750JR	R448	J0196043R	RMC73M-1F101JR
R355	J0195871R	RMC73S 2A750JR	R454	J0195950R	RMC73S 2A104JR
R356	J0195871R	RMC73S 2A750JR	R465	J0196093R	RMC73M-1F103JR
R357	J0196093R	RMC73M-1F103JR	R466	OPTION	NOT FITTED
R358	J0195906R	RMC73S--2A182JR	R467	J0196093R	RMC73M-1F103JR
R359	J0195871R	RMC73S 2A750JR	R468	OPTION	NOT FITTED
R360	J0196093R	RMC73M-1F103JR	R469	J0195875R	RMC73S 2A101JR
R361	J0196093R	RMC73M-1F103JR	R470	J0195875R	RMC73S 2A101JR
R389	J0196103R	RMC73M - 1F273JR	R471	J0700027M	100R 1/16W C/FILM 5%
R390	J0195895R	RMC73S 2A681JR	R472	J0195001R	RMC73 2B101JR
R400	J0195900R	RMC73S 2A102JR	R473	J0195001R	RMC73 2B101JR
R401	J0195950R	RMC73S 2A104JR	R474	J0196043R	RMC73M-1F101JR
R402	J0195945R	RMC73S 2A683JR	R475	J0196043R	RMC73M-1F101JR
R403	J0195875R	RMC73S 2A101JR	R476	J0196043R	RMC73M-1F101JR
R404	J0195943R	RMC73S-2A563JR	R477	J0700027M	100R 1/16W C/FILM 5%
R405	J0195943R	RMC73S-2A563JR	R478	J0700027M	100R 1/16W C/FILM 5%
R406	J0196059R	RMC73M-1F471JR	R479	J0700027M	100R 1/16W C/FILM 5%
R407	J0195875R	RMC73S 2A101JR	R480	J0700027M	100R 1/16W C/FILM 5%
R408	J0196068R	RMC73M-1F102JR	R481	J0700027M	100R 1/16W C/FILM 5%
R409	J0113725M	100R RES CARBON FILM 1/2W	R482	J0700027M	100R 1/16W C/FILM 5%
R410	J0196072R	RMC73M-1F152JR	R483	J0195875R	RMC73S 2A101JR
R411	J0195900R	RMC73S 2A102JR	R484	J0195875R	RMC73S 2A101JR
R412	J0196113R	RMC73M - 1F683JR	R485	J0700027M	100R 1/16W C/FILM 5%
R413	J0196059R	RMC73M-1F471JR	R486	J0195925R	RMC73S 2A103JR
R414	J0196043R	RMC73M-1F101JR	R487	J0700027M	100R 1/16W C/FILM 5%
R415	J0196059R	RMC73M-1F471JR	R488	J0195925R	RMC73S 2A103JR
R416	J0196043R	RMC73M-1F101JR	R489	J0700027M	100R 1/16W C/FILM 5%
R417	J0195037R	RMC73 2B104JR	R490	J0700027M	100R 1/16W C/FILM 5%
R418	J0196043R	RMC73M-1F101JR	R491	J0195925R	RMC73S 2A103JR
R419	J0195950R	RMC73S 2A104JR	R492	J0195925R	RMC73S 2A103JR
R420	J0196066R	RMC73M - 1F911JR	R493	J0196068R	RMC73M-1F102JR
R421	J0196061R	RMC73M-1F561JR 1608	R496	J0196088R	RMC73M-1F682JR
R422	J0196066R	RMC73M - 1F911JR	R497	J0196105R	RMC73M-1F333JR
R423	J0195950R	RMC73S 2A104JR	R498	J0196043R	RMC73M-1F101JR
R424	J0195891R	RMC73S 2A471JR	R499	J0196051R	RMC73M-1F221JR
R425	J0196074R	RMC73M-1F182JR 1K8 0603	R500	J0195929R	RMC73S 2A153JR
R426	J0196043R	RMC73M-1F101JR	R501	J0195025R	RMC73 - 2B103JR
R427	J0196061R	RMC73M-1F561JR 1608	R502	J0196090R	RMC73M-1F822JR 8K2 0603
R428	J0196066R	RMC73M - 1F911JR	R504	J0196088R	RMC73M-1F682JR
R429	J0196068R	RMC73M-1F102JR	R509	J0195939R	RMC73S2A393JR
R430	J0196061R	RMC73M-1F561JR 1608	R532	J0195875R	RMC73S 2A101JR
R431	J0196043R	RMC73M-1F101JR	R533	J0195900R	RMC73S 2A102JR
R432	J0196043R	RMC73M-1F101JR	R534	J0195875R	RMC73S 2A101JR
R433	J0195875R	RMC73S 2A101JR	R535	J0195875R	RMC73S 2A101JR
R434	J0195875R	RMC73S 2A101JR	R536	J0195875R	RMC73S 2A101JR
R435	J0196066R	RMC73M - 1F911JR	R537	J0195875R	RMC73S 2A101JR
R436	J0796491R	RMC73M-000R	R538	J0700027M	100R 1/16W C/FILM 5%
R437	J0796491R	RMC73M-000R	R539	J0700027M	100R 1/16W C/FILM 5%
R438	J0196061R	RMC73M-1F561JR 1608	R540	J0195875R	RMC73S 2A101JR
R439	J0196061R	RMC73M-1F561JR 1608	R541	J0195057R	RMC73 2B431JR 430R 1206
R440	J0196066R	RMC73M - 1F911JR	R542	J0700027M	100R 1/16W C/FILM 5%
R441	J0196084R	RMC73M-1F472JR	R543	J0700027M	100R 1/16W C/FILM 5%
R442	J0700034M	330R 1/16W C/FILM 5%	R544	J0195887R	RMC73S 2A331JR
R446	J0195950R	RMC73S 2A104JR	R545	J0195875R	RMC73S 2A101JR
R447	J0195891R	RMC73S 2A471JR	R546	J0196043R	RMC73M-1F101JR

A529360 PARTS LIST

I.D.	Part No.	Description
R547	J0196043R	RMC73M-1F101JR
R548	J0195007R	RMC73--2B331JR
R549	J0195879R	RMC73S 2A151JR
R550	J0196049R	RMC73M-1F181JR 180R 0603
R560	J0195001R	RMC73 2B101JR
R571	J0196068R	RMC73M-1F102JR
R586	J0195891R	RMC73S 2A471JR
R587	OPTION	NOT FITTED
R589	J0195910R	RMC73S-2A272JR
R600	J0196093R	RMC73M-1F103JR
R602	J0113684M	RNL-2R2J1-02LT
R603	J0113684M	RNL-2R2J1-02LT
R605	J0700075M	390K 1/16W C/FILM 5%
R606	J0195941R	RMC73S 2A473JR
R607	J0196043R	RMC73M-1F101JR
R608	J0195875R	RMC73S 2A101JR
R610	R232330	2K2 1/4W DRG NO
R611	R326330	360R 1/4W DRG NO
R612	R217330	27R 1/4W DRG NO
R613	R658330	680K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R616	J0196068R	RMC73M-1F102JR
R634	R232330	2K2 1/4W DRG NO
R635	R232330	2K2 1/4W DRG NO
R636	J0700051M	5K6 1/16W C/FILM 5%
R637	R120330	100R 1/4W DRG NO
R638	J0700049M	4K7 1/16W C/FILM 5%
R639	J0700049M	4K7 1/16W C/FILM 5%
R666	J0196068R	RMC73M-1F102JR
R667	J0700049M	4K7 1/16W C/FILM 5%
R702	R333330	3K3 1/4W DRG NO
R704	R648330	68K 1/4W DRG NO
R705	J0140931S	RSL-332J7WS(BSR-Z)
R706	R437571	4K7 2W 5% M02SL
R707	R135330	1K5 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R710	R217571	27R 2W 5% MO2SL
R710A	R217571	27R 2W 5% MO2SL
R711	R217571	27R 2W 5% MO2SL
R711A	R217571	27R 2W 5% MO2SL
R712	J0195925R	RMC73S 2A103JR
R713	J0100069M	RES FLM 1/8W 1.5K
R714	J0113748M	RD14S2H821JB
R715	J0110163S	RS08B3A562JS
R716	J0700054M	10K 1/16W C/FILM 5%
R717	J0700072M	220K 1/16W C/FILM 5%
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119649M	RN14S2B563FB(KOA)
R720	J0140933S	RSL-472J7WS(BSR-Z)
R724	J0110273S	RSO8B3D153JS
R725	R232570	2K2 1W 5% MO1SL
R731	R217571	27R 2W 5% MO2SL
R731A	R217571	27R 2W 5% MO2SL
R732	R217571	27R 2W 5% MO2SL
R732A	R217571	27R 2W 5% MO2SL
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R531330	5K1 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R738	R232330	2K2 1/4W DRG NO
R740	R457330	470K 1/4W DRG NO
R741	H163021	BTC LINK .6MM DIA WLT0652
R742	J0113735M	RD14S2H271JB
R743	H163021	BTC LINK .6MM DIA WLT0652
R745	R437330	4K7 1/4W DRG NO
R746	R120571	100R 2W 5% M02SL
R749	R242330	22K 1/4W DRG NO
R752	J0700074M	330K 1/16W C/FILM 5%
R757	J0700063M	47K 1/16W C/FILM 5%
R759	R536330	5K6 1/4W DRG NO
R764	R150330	100K 1/4W DRG NO
R765	J0700027M	100R 1/16W C/FILM 5%
R767	J0195875R	RMC73S 2A101JR
R768	J0196093R	RMC73M-1F103JR
R769	J0195902R	RMC73S 2A122JR
R770	R140730	10K 2% 1/4W MFR4
R776	J0700073M	270K 1/16W C/FILM 5%
R778	J0700056M	15K 1/16W C/FILM 5%
R779	R120571	100R 2W 5% M02SL
R780	R232330	2K2 1/4W DRG NO
R901	R242571	22K 2W M02S
R902	R546330	56K 1/4W DRG NO
R903	R222330	220R 1/4W DRG NO
R905	R150330	100K 1/4W DRG NO
R906	R130330	1K 1/4W DRG NO
R908	R130330	1K 1/4W DRG NO
R909	J0147642	RW99J3Y220JM 22R 7W
R911	R132725	1K2 MRS16T 1% M/F 1/16W
R912	R842736	82K 1% MF MFR4
R913	R447330	47K 1/4W DRG NO
R915	R658725	680K MRS16T 1% M/F
R916	J0700049M	4K7 1/16W C/FILM 5%
R917	R658725	680K MRS16T 1% M/F
R920	R140330	10K 1/4W DRG NO
R921	R546736	56K MFR4 1% 1/4W
R922	R247725	27K MRS16T1% M/FILM
R927	J0110281S	RS08B3D333JS
R932	R120330	100R 1/4W DRG NO
R933	J0700049M	4K7 1/16W C/FILM 5%
R941	R536330	5K6 1/4W DRG NO
R942	R521330	510R 1/4W DRG NO
R943	R120330	100R 1/4W DRG NO
R944	R244725	24K MRS16T 1% 1/16W
R945	R140725	10K MRS16T 1% M/FILM
R946	J0147544	RW99J3H150JM 15R 5W
R950	R433725	4K3 MRS16T 1/16W 1%
R951	R407330	4R7 1/4W DRG NO
R952	J0700058M	22K 1/16W C/FILM 5%
R953	J0700049M	4K7 1/16W C/FILM 5%
R954	J0700049M	4K7 1/16W C/FILM 5%
R956	R000618	0.5R 2W WIRE WOUND 5%

A529360 PARTS LIST

I.D.	Part No.	Description
R957	R323330	330R 1/4W DRG NO
R958	R842736	82K 1% MF MFR4
R959	R556725	560K MRS16T 1% M/FILM
R960	R133725	1K3 MRS16T 1% M/FILM
R961	J0700052M	6K8 1/16W C/FILM 5%
R962	R130330	1K 1/4W DRG NO
R963	J0700041M	1K 1/16W C/FILM 5%
R964	H163021	BTC LINK .6MM DIA WLT0652
R966	R130330	1K 1/4W DRG NO
R967	J0700072M	220K 1/16W C/FILM 5%
R968	R000618	0.5R 2W WIRE WOUND 5%
R969	R242330	22K 1/4W DRG NO
R970	R120330	100R 1/4W DRG NO
R971	J0144050	ERF5ZK122 1K2 KOA RES 5W
R972	R150744	&100K 3W PRO3 M/F LANCET
R975	J0700041M	1K 1/16W C/FILM 5%
R976	R323330	330R 1/4W DRG NO
R977	R120330	100R 1/4W DRG NO
R978	R323330	330R 1/4W DRG NO
R980	R100551	1R 1/4W FR8225(TDK)-BEAB-
R981	J0700064M	56K 1/16W C/FILM 5%
R982	R319330	39R 1/4W DRG NO
R985	J0187072M	2K0 1/16W PHILIPS
R986	R150330	100K 1/4W DRG NO
R987	R319330	39R 1/4W DRG NO
R988	J0700067M	100K 1/16W C/FILM 5%
R989	E441045	PTC TYPE 2322-662-96624
R990	R316330	36R 1/4W
R991	R353714	330K 1/2W METAL FLM-BEAB
R992	J0700058M	22K 1/16W C/FILM 5%
R993	J0700056M	15K 1/16W C/FILM 5%
R994	R323330	330R 1/4W DRG NO
R996	R427330	470R 1/4W DRG NO
R997	J0187092M	RD14S1J133JB
R998	R323571	330R 2W 5% MO2S F
R999	R170727	10M 1W VR68 UL BEAB
RA01	J0700027M	100R 1/16W C/FILM 5%
RA02	J0196093R	RMC73M-1F103JR
RA03	J0700047M	3K3 1/16W C/FILM 5%
RA04	J0700055M	12K 1/16W C/FILM 5%
RA05	R120330	100R 1/4W DRG NO
RA06	J0196101R	RMC73M-1F223JR 1608
RA07	J0196111R	RMC73M - 1F563JR
RA08	J0196113R	RMC73M - 1F683JR
RA09	J0196101R	RMC73M-1F223JR 1608
RA10	J0196111R	RMC73M - 1F563JR
RA11	J0196084R	RMC73M-1F472JR
RA12	J0196113R	RMC73M - 1F683JR
RA13	J0196093R	RMC73M-1F103JR
RA14	R120330	100R 1/4W DRG NO
RA15	J0196084R	RMC73M-1F472JR
RA16	J0196104R	RMC73M-1F303JR 30K 0603
RA17	J0195953R	RMC73S-2A134JR 130K
RA18	J0700012M	6R8 1/16W C/FILM 5%
RA19	J0195025R	RMC73 - 2B103JR
RA20	J0187086M	RD14S1J752JB
RA21	J0195025R	RMC73 - 2B103JR
RA22	J0187086M	RD14S1J752JB
RA23	J0196078R	RMC73M-1F272JR
RA24	J0700054M	10K 1/16W C/FILM 5%
RA25	J0196093R	RMC73M-1F103JR
RA26	J0195916R	RMC73S 2A472JR
RA27	R427748	470R 3W PRO3 5% TAPED
RA31	J0796491R	RMC73M-000R
RA32	J0196078R	RMC73M-1F272JR
RA33	J0195945R	RMC73S 2A683JR
RA34	J0195945R	RMC73S 2A683JR
RA35	J0195910R	RMC73S-2A272JR
RA36	J0196045R	RMC73M-1F121JR 120R 1608
RA37	J0196045R	RMC73M-1F121JR 120R 1608
RA38	J0196118R	RMC73M-1F104JR 100K
RA39	J0196030R	RMC73M-1F330JR 33R
RA40	J0196118R	RMC73M-1F104JR 100K
RA41	J0196030R	RMC73M-1F330JR 33R
RA45	J0113725M	100R RES CARBON FILM 1/2W
RM01	J0196043R	RMC73M-1F101JR
RM02	J0196043R	RMC73M-1F101JR
RM05	J0195001R	RMC73 2B101JR
RM06	J0196043R	RMC73M-1F101JR
RM07	J0700027M	100R 1/16W C/FILM 5%
RM08	J0196043R	RMC73M-1F101JR
RM09	J0196043R	RMC73M-1F101JR
RM10	J0196043R	RMC73M-1F101JR
RM13	J0196093R	RMC73M-1F103JR
RM14	J0196093R	RMC73M-1F103JR
RM15	J0195025R	RMC73 - 2B103JR
RM16	J0195025R	RMC73 - 2B103JR
RM17	J0196093R	RMC73M-1F103JR
RM51	J0700054M	10K 1/16W C/FILM 5%
RS16	J0195916R	RMC73S 2A472JR
RS17	J0196068R	RMC73M-1F102JR
RS18	J0196068R	RMC73M-1F102JR
RS19	J0196068R	RMC73M-1F102JR
RS20	J0195950R	RMC73S 2A104JR
RS21	J0195916R	RMC73S 2A472JR
RS22	J0196068R	RMC73M-1F102JR
RS23	J0195900R	RMC73S 2A102JR
RS24	J0195900R	RMC73S 2A102JR
RS25	J0196118R	RMC73M-1F104JR 100K
RS30	J0195900R	RMC73S 2A102JR
RS32	J0196068R	RMC73M-1F102JR
RS33	J0196118R	RMC73M-1F104JR 100K
RS35	J0196084R	RMC73M-1F472JR
RS38	J0196068R	RMC73M-1F102JR
RS40	J0700049M	4K7 1/16W C/FILM 5%
RS41	J0195900R	RMC73S 2A102JR
RS46	J0196118R	RMC73M-1F104JR 100K
RS47	J0196068R	RMC73M-1F102JR
RS49	J0700041M	1K 1/16W C/FILM 5%
RS50	J0196068R	RMC73M-1F102JR

A529360 PARTS LIST

I.D.	Part No.	Description
RS51	J0196118R	RMC73M-1F104JR 100K
RS53	J0196068R	RMC73M-1F102JR
RS54	J0196068R	RMC73M-1F102JR
RS55	J0700049M	4K7 1/16W C/FILM 5%
RS60	J0196118R	RMC73M-1F104JR 100K
RS61	J0196084R	RMC73M-1F472JR
RS62	J0700041M	1K 1/16W C/FILM 5%
RS64	J0195900R	RMC73S 2A102JR
RS65	J0195900R	RMC73S 2A102JR
RS91	J0195871R	RMC73S 2A750JR
S001	E139506	5 WAY TACT SWITCH
SCART1	E826946	A20 DOUBLE SCART
SCART2	E826945	SINGLE SCART METALLO
SHROUD	X321241	&ACTUATOR SHROUD
SW900	J2634732	SWITCH SDD-FC BEAB
T700	JBW01041	FBT HFL1532G BEABT
T702	J2260291U	H DRIVE TRANSFORMER TAW
T900	L380183	SMT4 +/- 17V BEAB
T902	L380181	SW MODE XXXX CT286D8 BEAB
VR904	E311108	500R POT HORIZONTAL TAPE
VR964	J0160211R	EVND8AA03B13-TAPE(PANA)
W002	EC5A100A	7/0.2MM S000030
W003	EC5A060A	7/0.2MM S000030
W005	EC530603	7/0.2MM S000010
W008	EC5A120A	7/0.2 S000030
W009	EC5A060A	7/0.2MM S000030
W010	EC530903	7/0.2MM S000029
W017	EC530503	7/0.2MM S000029
W018	EC530203	7/0.2MM S000010
W019	EC530603	7/0.2MM S000010
W020	EC530303	7/0.2MM S000010
W021	EC5A120A	7/0.2 S000030
W022	EC530903	7/0.2MM S000029
W023	EC530203	7/0.2MM S000010
W024	EC5A110A	7/0.2MM S000030
W025	EC531603	7/0.2 S000029
W026	EC531603	7/0.2 S000029
X001	E516081F	CRYSTAL 6MHZ
X200	E518054	K9453M
X219	E518053	K3953M
X305	L420187	BLM11A102S
X513	E516030F	12MHz X'TAL NDK 5MM LEG
Z005	T536219	BZX79B3V3~PHILIPS~
Z006	T536312	PDZ-B 3.6B 2% SMT ZENER
Z007	T536279	BZX284-C5V6 5% S MOUNT
Z008	T536279	BZX284-C5V6 5% S MOUNT
Z014	T536312	PDZ-B 3.6B 2% SMT ZENER
Z205	T536215	BZX 79C 33V~PHILIPS~
Z404	T536181	BZX79C 13V~PHILIPS~
Z501	T536184	BZX79C 9V1~PHILIPS~
Z502	T536184	BZX79C 9V1~PHILIPS~
Z503	T536184	BZX79C 9V1~PHILIPS~
Z504	T536184	BZX79C 9V1~PHILIPS~
Z505	T536284	BZX284-C9V1
Z506	T536284	BZX284-C9V1
Z507	T536277	BZX284-C 4V7 5%
Z600	T536178	BZX79C 3V3~PHILIPS~
Z601	T536178	BZX79C 3V3~PHILIPS~
Z603A	T536173	BZX79C18V~PHILIPS~
Z603B	T536215	BZX 79C 33V~PHILIPS~
Z604	T536259	BZX79C56V
Z607	T536284	BZX284-C9V1
Z608	T536284	BZX284-C9V1
Z610	T536173	BZX79C18V~PHILIPS~
Z615	T536172	BZX79C27V~PHILIPS~
Z616	T536280	BZX284-C6V2
Z703	T536235	BZX79B18V~PHILIPS~
Z704	H163021	BTC LINK .6MM DIA WLT0652
Z713	J2339251M	HZS36-ILT
Z741	T536259	BZX79C56V
Z744	T536227	BZX79B7V5~PHILIPS~
Z900	T536266	BZV85-C27V
Z927	T536173	BZX79C18V~PHILIPS~
Z932	H163021	BTC LINK .6MM DIA WLT0652
Z942	T536179	BZX79C 6V2~PHILIPS~
Z964	T536236	BZX79B22V~PHILIPS~
Z990	T536173	BZX79C18V~PHILIPS~
Z991	T536173	BZX79C18V~PHILIPS~
Z992	T536173	BZX79C18V~PHILIPS~
ZA01	T536279	BZX284-C5V6 5% S MOUNT
ZA08	T536268	BZV85-C22V
ZA10	T536172	BZX79C27V~PHILIPS~
ZR048A	W470200	1MM 1/D SLEEVING BLACK
ZR048B	W470200	1MM 1/D SLEEVING BLACK
ZS14	T536271	BZX284-C2V7
ZS25	T536271	BZX284-C2V7
ZS31	T536271	BZX284-C2V7
ZS42	T536271	BZX284-C2V7
ZS51	T536271	BZX284-C2V7
ZS60	T536271	BZX284-C2V7
ZZA08	W470200	1MM 1/D SLEEVING BLACK

A529370 PARTS LIST

I.D.	Part No.	Description
#15	E573018	FERRITE CLAMP CORE
#200	J3731082	PURSE LOCK
#27	L350016	FERRITE CORE
#270	J2123462M	FERRITE BEADS TYPE B2.3UH
#40	E573018	FERRITE CLAMP CORE
#4069	J3731082	PURSE LOCK
#4070	G864006	CABLE TIE T18R
#500	E573018	FERRITE CLAMP CORE
#5000	N937053	CHASSIS FRAME
#5071	G291311	3X12 BT SCREW (BLACK)
#5072	G291311	3X12 BT SCREW (BLACK)
#5073	G291311	3X12 BT SCREW (BLACK)
#5075	N332067	SPACER
#67	J3731082	PURSE LOCK
#68	J3731082	PURSE LOCK
#802	G864006	CABLE TIE T18R
#E802	JBM00041	FERRITE CORES BP53RB
AV300	JEU00581	PHONO-S/VHS CONNECTOR
B001	PC55002	A20 MAIN PCB BEAB
C001	J0893179R	CKM-104K160B-CNT1608
C002	J0893027R	CKM-104K250B-CNT2125
C003	J0800271R	ELECT CAP 0.1UF 50V SMG
C004	J0800282R	CAP ELECTRO 2.2UF-M 50V
C005	J0800291R	CAP ELEC 10uF 16V SMG
C007	J0800282R	CAP ELECTRO 2.2UF-M 50V
C008	J0800291R	CAP ELEC 10uF 16V SMG
C009	J0800291R	CAP ELEC 10uF 16V SMG
C010	J0893179R	CKM-104K160B-CNT1608
C011	J0893179R	CKM-104K160B-CNT1608
C012	J0893027R	CKM-104K250B-CNT2125
C013	J0227219R	CK73B1H104KR 100N 1206
C014	J0800317R	CP ELECTRO 47UF SMG 16
C015	J0893179R	CKM-104K160B-CNT1608
C016	J0228042R	CC73SCH1H330JR
C017	J0228042R	CC73SCH1H330JR
C019	J0893222R	CKM-103K500B-CNT1608
C020	J0800271R	ELECT CAP 0.1UF 50V SMG
C202	J0800364F	CAP ELECT 1000UF 50V SMG
C203	J0800361F	CAP ELEC 1000UF-M SMG 16V
C204	J0227219R	CK73B1H104KR 100N 1206
C205	J0800317R	CP ELECTRO 47UF SMG 16
C206	J0893044R	CKM 103K500B CNT2125
C208	J0800291R	CAP ELEC 10uF 16V SMG
C209	J0893044R	CKM 103K500B CNT2125
C210	J0893222R	CKM-103K500B-CNT1608
C211	J0893123R	CC73MCH1H560JR
C212	J0893113R	CC73MCH1H100C
C213	J0893044R	CKM 103K500B CNT2125
C215	J0893222R	CKM-103K500B-CNT1608
C220	J0893044R	CKM 103K500B CNT2125
C301	J0800352R	ELEC CAP 470UF 10V SMG
C302	J0227009R	CK73B1H102KR 1N 1206
C303	J0893027R	CKM-104K250B-CNT2125
C304	J0893027R	CKM-104K250B-CNT2125
C305	J0880194R	0.1UF 50V +-5% (100N)
C309	J0800352R	ELEC CAP 470UF 10V SMG
C310	J0893031R	CKM 102K500B CNT2125
C312	J0893179R	CKM-104K160B-CNT1608
C313	J0893027R	CKM-104K250B-CNT2125
C318	J0893027R	CKM-104K250B-CNT2125
C324	J0893179R	CKM-104K160B-CNT1608
C325	J0893179R	CKM-104K160B-CNT1608
C326	J0893179R	CKM-104K160B-CNT1608
C327	J0880194R	0.1UF 50V +-5% (100N)
C328	J0893027R	CKM-104K250B-CNT2125
C329	J0893027R	CKM-104K250B-CNT2125
C331	J0800326R	CEL-101M160WMFT
C332	J0800317R	CP ELECTRO 47UF SMG 16
C345	J0227219R	CK73B1H104KR 100N 1206
C369	J0800326R	CEL-101M160WMFT
C370	J0893027R	CKM-104K250B-CNT2125
C371	J0800326R	CEL-101M160WMFT
C372	J0893027R	CKM-104K250B-CNT2125
C373	J0800326R	CEL-101M160WMFT
C374	J0227219R	CK73B1H104KR 100N 1206
C403	J0893126R	CCM-101J500CHCNT1608
C404	J0800294R	ELECT CAP 10UF 50V SMG
C405	J0893031R	CKM 102K500B CNT2125
C406	J0228054R	CC73SCH1H101JR
C407	J0800294R	ELECT CAP 10UF 50V SMG
C408	J0893031R	CKM 102K500B CNT2125
C410	J0227009R	CK73B1H102KR 1N 1206
C411	J0228054R	CC73SCH1H101JR
C412	J0893031R	CKM 102K500B CNT2125
C413	J0228054R	CC73SCH1H101JR
C414	J0800294R	ELECT CAP 10UF 50V SMG
C415	J0893031R	CKM 102K500B CNT2125
C416	J0800294R	ELECT CAP 10UF 50V SMG
C417	J0893208R	CKM-102K500B-CNT1608
C420	J0800291R	CAP ELEC 10uF 16V SMG
C422	J0893031R	CKM 102K500B CNT2125
C423	J0893027R	CKM-104K250B-CNT2125
C424	J0800291R	CAP ELEC 10uF 16V SMG
C425	J0893027R	CKM-104K250B-CNT2125
C431	J0227449R	CK73B1E334ZR 330N 25V
C432	J0227449R	CK73B1E334ZR 330N 25V
C433	J0227449R	CK73B1E334ZR 330N 25V
C434	J0227449R	CK73B1E334ZR 330N 25V
C438	J0893179R	CKM-104K160B-CNT1608
C439	C353883	GRM40Y5V334Z16PT
C441	J0227449R	CK73B1E334ZR 330N 25V
C442	J0227449R	CK73B1E334ZR 330N 25V
C443	J0893248R	CKM-334Z160B-CNT1608
C444	C353883	GRM40Y5V334Z16PT
C445	C353883	GRM40Y5V334Z16PT
C446	C353883	GRM40Y5V334Z16PT
C447	C353883	GRM40Y5V334Z16PT
C448	C353883	GRM40Y5V334Z16PT
C452	J0893197R	CKM-223K250B-CNT1608
C454	J0893027R	CKM-104K250B-CNT2125

A529370 PARTS LIST

I.D.	Part No.	Description
C457	J0796491R	RMC73M-000R
C461	J0893123R	CC73MCH1H560JR
C462	J0893213R	CC73MCH1H222JR
C463	J0893179R	CKM-104K160B-CNT1608
C465	J0800294R	ELECT CAP 10UF 50V SMG
C466	J0800353R	CAP ELECTRO 470UF 16V
C467	J0800294R	ELECT CAP 10UF 50V SMG
C468	J0893031R	CKM 102K500B CNT2125
C469	J0893179R	CKM-104K160B-CNT1608
C470	J0893179R	CKM-104K160B-CNT1608
C471	J0800327R	ELECT CAP 100UF 25V SMG
C500	J0893039R	CKM 472K500B CNT 2125
C501	J0800279R	ELECT CAP 1.UF 50V
C502	J0195250R	RMC73S 000R
C503	J0893044R	CKM 103K500B CNT2125
C504	J0800279R	ELECT CAP 1.UF 50V
C506	J0890087R	CAP CERAMIC 1000pf-B 50V
C508	J0893222R	CKM-103K500B-CNT1608
C509	J0893222R	CKM-103K500B-CNT1608
C510	J0227436R	0.22U +/-10% 1206 SMT
C511	J0893206R	680PF +/-10% 0603 SMT
C518U	C150711	CAP 100N 36521104 100V POL
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
C572	J0228066R	GRM40CDG331J50PT
C575	J0893027R	CKM-104K250B-CNT2125
C576	J0893048R	CKM-223K500B-CNT2125
C577	J0893027R	CKM-104K250B-CNT2125
C578	J0893027R	CKM-104K250B-CNT2125
C579	J0893027R	CKM-104K250B-CNT2125
C581	J0880016R	POLY CAP FLM 0.1UF 50V
C582	J0893027R	CKM-104K250B-CNT2125
C583	J0195250R	RMC73S 000R
C585	J0800372F	CEL 332 M160WNL SMG 5MM
C586	J0893027R	CKM-104K250B-CNT2125
C588	J0893027R	CKM-104K250B-CNT2125
C589	J0893039R	CKM 472K500B CNT 2125
C590	J0195250R	RMC73S 000R
C591	J0195250R	RMC73S 000R
C592	J0195250R	RMC73S 000R
C593	J0800279R	ELECT CAP 1.UF 50V
C594	J0228038R	CC73SCH1H220JR
C595	J0228038R	CC73SCH1H220JR
C596	J0893027R	CKM-104K250B-CNT2125
C597	J0800372F	CEL 332 M160WNL SMG 5MM
C598	C457884	&GRM40X7R474K25PT 470N
C599	J0893035R	CKM--222K500B CNT2125
C602	J0800337R	CEL-221M350WMFT
C603	J0800329R	ELECT CAP 100UF 50V SMG
C604	J0880044R	CAP POLYESTER 0.01UF K50V
C605	C150711	CAP 100N 36521104 100V POL
C606	J0893027R	CKM-104K250B-CNT2125
C607	J0893027R	CKM-104K250B-CNT2125
C610	J0890092R	CAP CERAMIC 0.0022uF 50V
C616	J0800339F	CAP ELECT 220UF 63V
C617	J0227009R	CK73B1H102KR 1N 1206
C620	J0893027R	CKM-104K250B-CNT2125
C621	J0893208R	CKM-102K500B-CNT1608
C639	J0800292R	CAP ELECT 10UF 25V SMG
C644	J0890092R	CAP CERAMIC 0.0022uF 50V
C701	J0243507R	CK45B2H331KB
C702	J0257540F	ELEC CAP 4U7 250V
C703	C140760	10n 2KV R/EVOX PHE428
C704	JAJ00138F	CC-222K202R-DF 2N2 2KV
C705	J0299993F	CAP 18NF 5% 630V POLY
C706	J0890087R	CAP CERAMIC 1000pf-B 50V
C707	JAJ00134R	CK45-R3DD102K 1N 2KV
C708	J0244505R	CER CAP 2n2-K 500V
C709	J0253953R	CE04W2C2R2M
C710	J0253953R	CE04W2C2R2M
C711	C353764	&330N MKP379 44334
C712	C353764	&330N MKP379 44334
C713	C353764	&330N MKP379 44334
C714	C158764	180N MKP379 44184
C715	J0243512R	CK45B2H821KB
C716	C140707	CAP 10N 365-51103 MULARD
C719	J0257540F	ELEC CAP 4U7 250V
C720	J0880033R	CQM-152K500HFT
C724	JAJ00121R	CK45-R3DD101K 100PF 2KV
C726	J0800336R	CAP ELEC 220UF M SMG 25V
C727	J0243507R	CK45B2H331KB
C732	J0800291R	CAP ELEC 10uF 16V SMG
C735U	J0880044R	CAP POLYESTER 0.01UF K50V
C737	C160708	1UF +-10% 250V 368-45105
C740	J0244509R	CER CAP 4700PF-K 500V
C741	J0244509R	CER CAP 4700PF-K 500V
C742	J0800337R	CEL-221M350WMFT
C743	J0880053R	CQ93M1H473KEB(MF) N/PAN
C747	J0250511R	CAP POLY 0.022UF PHILIPS
C748	JAJ00134R	CK45-R3DD102K 1N 2KV
C749	J0880194R	0.1UF 50V +-5% (100N)
C764	J0800279R	ELECT CAP 1.UF 50V
C769	JAJ00134R	CK45-R3DD102K 1N 2KV
C770	J0800292R	CAP ELECT 10UF 25V SMG
C900	C150763	&100NF 20% X2 275V BEABT
C901	J0262774N	0.22UF 250VAC X2 ~BEABT
C902	J0262774N	0.22UF 250VAC X2 ~BEABT
C903	J0890083R	CK45 B1H471KB
C904	C648763	&68NF 20% X2 275V BEABT
C905	C001561	ELECT CAP 100UF 250V
C908	J0800329R	ELECT CAP 100UF 50V SMG
C909	J0800352R	ELEC CAP 470UF 10V SMG
C910	J0880044R	CAP POLYESTER 0.01UF K50V
C911	J0800328R	CEL-101M350WMFT
C912	J0244505R	CER CAP 2n2-K 500V
C913	J0800327R	ELECT CAP 100UF 25V SMG
C914	C005046	ELECT 1000UF 25V LXY
C915	J0800354R	470UF 25V SMG
C916	C005046	ELECT 1000UF 25V LXY
C917	J0880048R	CQT223K50MB (PANASONIC)
C918	C001561	ELECT CAP 100UF 250V

A529370 PARTS LIST

I.D.	Part No.	Description
C919	J0890078R	CK45B1H221KB (MURATA)
C920	C001561	ELECT CAP 100UF 250V
C921	C001561	ELECT CAP 100UF 250V
C922	J0880037R	CQM332K500HFT
C923	J0880037R	CQM332K500HFT
C924	J0800294R	ELECT CAP 10UF 50V SMG
C925	JAJ00121R	CK45-R3DD101K 100PF 2KV
C926	JAJ00127R	CK45-R3DD 331K
C927	JAJ00121R	CK45-R3DD101K 100PF 2KV
C929	J0800327R	ELECT CAP 100UF 25V SMG
C931	JAJ00138F	CC-222K202R-DF 2N2 2KV
C932	J0880037R	CQM332K500HFT
C933	J0253491F	ELEC CAP 100UF 200V
C936	J0880051R	CQ93M1H333KEB PANASONIC
C942	J0880042R	CQ93M1H682KEB(MF) N/PAN
C950	J0259431F	ELEC CAP 220UF 200V
C951	J0800362F	CAP ELECT 1000UF 25V SMG
C952	J0800362F	CAP ELECT 1000UF 25V SMG
C953	J0243509R	CERAMIC CAP 470p 500V
C954	J0243509R	CERAMIC CAP 470p 500V
C955	JAJ00129R	CK45-R3DD 471K
C957	J0243509R	CERAMIC CAP 470p 500V
C959	J0800353R	CAP ELECTRO 470UF 16V
C960	J0244501R	CER CAP 1000PF-K 500V
C961	J0244501R	CER CAP 1000PF-K 500V
C962	J0244501R	CER CAP 1000PF-K 500V
C963	J0244501R	CER CAP 1000PF-K 500V
C964	J0243511R	CER CAP 680PF-K 500V
C967	J0243509R	CERAMIC CAP 470p 500V
C970	J0800345R	ELECT CAP 330UF 25V SMG
C971	J0880044R	CAP POLYESTER 0.01UF K50V
C977	J0243509R	CERAMIC CAP 470p 500V
C986	J0800328R	CEL-101M350WMFT
C987	J0800352R	ELEC CAP 470UF 10V SMG
C990	J0880048R	CQT223K50MB (PANASONIC)
C991	E884110	SPARK GAP 10N 2KV SDUK 16
C992	J0880044R	CAP POLYESTER 0.01UF K50V
C993	C150891	100N 500V CAP
C994	J0800327R	ELECT CAP 100UF 25V SMG
C995	J0880037R	CQM332K500HFT
C997	J0880031R	CQ93M1H102KEB (MF) N/PAN
C999	C232753	2N2 4KVAC PME294 UL BEABT
CA01U	J0880198R	POLY CAP 0.22UF-J 50V
CA02U	J0880198R	POLY CAP 0.22UF-J 50V
CA03	J0880198R	POLY CAP 0.22UF-J 50V
CA04	J0893031R	CKM 102K500B CNT2125
CA05	J0893031R	CKM 102K500B CNT2125
CA06	J0893118R	CCM-270J500CHCNT1608
CA07	C001550	4700UF 25V SMG S/LEG
CA08	J0893135R	CC73MCH1H471JR 1608
CA09	J0893179R	CKM-104K160B-CNT1608
CA10	J0893133R	CC73MCH1H331JR
CA11	J0893135R	CC73MCH1H471JR 1608
CA12	J0893135R	CC73MCH1H471JR 1608
CA13	J0284623R	CEL-1R0M500WMFT(BP)E
CA14	C001550	4700UF 25V SMG S/LEG
CA15	C343882	GRM40X7R333K50-550
CA16	J0880198R	POLY CAP 0.22UF-J 50V
CA17	J0893208R	CKM-102K500B-CNT1608
CA18	J0893208R	CKM-102K500B-CNT1608
CA20	J0893027R	CKM-104K250B-CNT2125
CA21	J0228070R	MINI CHIP 470PF-J CH 50V
CA22	J0893133R	CC73MCH1H331JR
CA24	J0893027R	CKM-104K250B-CNT2125
CA25	J0880064R	CQM - 334J500HFT
CA27	J0893031R	CKM 102K500B CNT2125
CA28	J0284623R	CEL-1R0M500WMFT(BP)E
CA29	C343882	GRM40X7R333K50-550
CA30	J0893208R	CKM-102K500B-CNT1608
CA31	J0800291R	CAP ELEC 10uF 16V SMG
CA32	J0893179R	CKM-104K160B-CNT1608
CA33	J0893179R	CKM-104K160B-CNT1608
CA34	J0893222R	CKM-103K500B-CNT1608
CA35	J0800316R	47u 10V ELECT CAP SMG
CA36	J0800316R	47u 10V ELECT CAP SMG
CA37	J0800325R	CEL-101M100WMFT
CA38	J0800325R	CEL-101M100WMFT
CA39	J0893219R	CCM-682K500B-CNT1608
CA40	J0893042R	CKM 682K500B CNT2125
CA41	J0800325R	CEL-101M100WMFT
CA42	J0284623R	CEL-1R0M500WMFT(BP)E
CA44	J0284623R	CEL-1R0M500WMFT(BP)E
COVER	N332053	COVER
CS10B	JAA00381R	10UF 6.3V SMT 3216
CS11	J0228054R	CC73SCH1H101JR
CS12	J0893126R	CCM-101J500CHCNT1608
CS20	J0800326R	CEL-101M160WMFT
CS23B	JAA00381R	10UF 6.3V SMT 3216
CS24	J0893126R	CCM-101J500CHCNT1608
CS25	J0893126R	CCM-101J500CHCNT1608
CS31	J0893126R	CCM-101J500CHCNT1608
CS32	J0893126R	CCM-101J500CHCNT1608
CS33B	JAA00381R	10UF 6.3V SMT 3216
CS40B	JAA00381R	10UF 6.3V SMT 3216
CS44	J0893126R	CCM-101J500CHCNT1608
CS45	J0893126R	CCM-101J500CHCNT1608
CS51	J0893126R	CCM-101J500CHCNT1608
CS52	J0228054R	CC73SCH1H101JR
CS53B	JAA00381R	10UF 6.3V SMT 3216
CS60B	JAA00381R	10UF 6.3V SMT 3216
CS62	J0893126R	CCM-101J500CHCNT1608
CS63	J0893126R	CCM-101J500CHCNT1608
CS91	J0796491R	RMC73M-000R
CU01	J0800359R	CEL-102M100WMFT
D001	T531069	SHOTTKY 30V/200mA/BAT254
D002	T531067	DIODE BAS216 S/MOUNT
D003	T531067	DIODE BAS216 S/MOUNT
D004	T531069	SHOTTKY 30V/200mA/BAT254
D006	T531069	SHOTTKY 30V/200mA/BAT254
D007	T531069	SHOTTKY 30V/200mA/BAT254

A529370 PARTS LIST

I.D.	Part No.	Description
D008	T531069	SHOTTKY 30V/200mA/BAT254
D009	T531069	SHOTTKY 30V/200mA/BAT254
D011	J2343963M	MPG06J (TAPE) GI
D015	T531067	DIODE BAS216 S/MOUNT
D016	T531069	SHOTTKY 30V/200mA/BAT254
D017	T531069	SHOTTKY 30V/200mA/BAT254
D018	T531069	SHOTTKY 30V/200mA/BAT254
D206	T531067	DIODE BAS216 S/MOUNT
D208	T531067	DIODE BAS216 S/MOUNT
D209	T531067	DIODE BAS216 S/MOUNT
D301	T531068	DIODE MA723/TP PANASONIC
D501	T531067	DIODE BAS216 S/MOUNT
D502	T531056	DIODE BYV10-40 ~MULLARD
D503	T531056	DIODE BYV10-40 ~MULLARD
D507	T531067	DIODE BAS216 S/MOUNT
D508	J2348921M	DIODE 1N4531
D522	T531068	DIODE MA723/TP PANASONIC
D523	T531069	SHOTTKY 30V/200mA/BAT254
D601	J2348921M	DIODE 1N4531
D603	T531067	DIODE BAS216 S/MOUNT
D604	T431113	DIODE BYD33J MULL BEAB
D607	T531053	DIODE IN4148 MULL/PHIL/ITT
D608	T531053	DIODE IN4148 MULL/PHIL/ITT
D610	T431113	DIODE BYD33J MULL BEAB
D611	T431113	DIODE BYD33J MULL BEAB
D622	J2343962M	MPG06G
D645	T536259	BZX79C56V
D701	T431113	DIODE BYD33J MULL BEAB
D702	T431113	DIODE BYD33J MULL BEAB
D703	J2343941M	RGP10G
D706	T431117F	DIODE BY228 P/F PHILIPS
D707	T531086F	BYW96E
D708	J2336612	RU3AM
D711	T531086F	BYW96E
D713	T431113	DIODE BYD33J MULL BEAB
D714	T431113	DIODE BYD33J MULL BEAB
D715	J2348921M	DIODE 1N4531
D716	J2348921M	DIODE 1N4531
D735	T431113	DIODE BYD33J MULL BEAB
D739	J2348921M	DIODE 1N4531
D745	J2348921M	DIODE 1N4531
D904	J2348921M	DIODE 1N4531
D905	T431113	DIODE BYD33J MULL BEAB
D906	T431113	DIODE BYD33J MULL BEAB
D907	T531055	DIODE BAT85 SCHOTTKY MULL
D910	J2348921M	DIODE 1N4531
D911	J2348921M	DIODE 1N4531
D913	J2348921M	DIODE 1N4531
D914	J2348921M	DIODE 1N4531
D915	T431113	DIODE BYD33J MULL BEAB
D916	T431113	DIODE BYD33J MULL BEAB
D919	T531086F	BYW96E
D920	J2342711M	DIODE EM2A (SANKEN)
D921	J2342711M	DIODE EM2A (SANKEN)
D922	J2342711M	DIODE EM2A (SANKEN)
D923	J2342711M	DIODE EM2A (SANKEN)
D924	J2342711M	DIODE EM2A (SANKEN)
D925	T431122	DIODE BYV28-200~PHILIPS~
D927	J2348921M	DIODE 1N4531
D931	J2342711M	DIODE EM2A (SANKEN)
D933	T536259	BZX79C56V
D934	T431114	& BYD33M
D939	T431113	DIODE BYD33J MULL BEAB
D953	T431145	BYW29E-200
D953A	H224075	H/SINK F9-4-220 &TAG COL
D955	T431127	BYR29F-700
D955A	H235369	FI2-32-2LA-2 HEATSINK
D955B	G291023	M2.5x8 TAPTITE SCREW
D955C	G560333	M2.5 SPRING WASHER
D960	J2342711M	DIODE EM2A (SANKEN)
D961	J2342711M	DIODE EM2A (SANKEN)
D962	J2342711M	DIODE EM2A (SANKEN)
D963	J2342711M	DIODE EM2A (SANKEN)
D970	T431113	DIODE BYD33J MULL BEAB
D977	T431122	DIODE BYV28-200~PHILIPS~
D982	J2348921M	DIODE 1N4531
D984	T531053	DIODE IN4148 MULL/PHIL/ITT
D991	T431113	DIODE BYD33J MULL BEAB
D992	T431120	DIODE BYV27-150 ~MULLARD~
D994	T531055	DIODE BAT85 SCHOTTKY MULL
D995	T531053	DIODE IN4148 MULL/PHIL/ITT
D996	J2348921M	DIODE 1N4531
D997U	J2348921M	DIODE 1N4531
DA01	T531067	DIODE BAS216 S/MOUNT
DA02	J2348921M	DIODE 1N4531
DA03	T531067	DIODE BAS216 S/MOUNT
DS14	T531067	DIODE BAS216 S/MOUNT
DS25	T531067	DIODE BAS216 S/MOUNT
DS31	T531067	DIODE BAS216 S/MOUNT
DS42	T531067	DIODE BAS216 S/MOUNT
DS51	T531067	DIODE BAS216 S/MOUNT
DS60	T531067	DIODE BAS216 S/MOUNT
E002	E843366	OSD SHIELDED LEAD
E006	E843377	LEAD ASSY 7 WAY 320MM
E04	E843369	SPEAKER LEAD
E10	E846825	A5 SCREEN LD 2PIN EHUK
E1015	E843304	4 WAY LD 430mm(PS06/E413)
E20	E843353	2 WAY SHIELDED LEAD 330MM
E206	E843314	CPT EARTH LEAD
E207	E843314	CPT EARTH LEAD
E208	E843286	GROUND LEAD FEMALE
E30	E846825	A5 SCREEN LD 2PIN EHUK
E500	E843376	OSD SHIELDED LEAD
E601	J2661752	3P PLUG PIN/BASE UL BEAB
E802	E843351	A20 8 WAY CRT BASE LEAD
E803	E846902	A7 CRT BASE LEAD 550mm
F900	J2722446	FUS-4A T4AH 250V BEABT
F900A	J2721792	FUSE HOLDER UL/BEAB
F901	E882359	FUSE GLASS T2.0AL BEABT
F901A	J2721792	FUSE HOLDER UL/BEAB

A529370 PARTS LIST

I.D.	Part No.	Description
HS01	E826160	H/P SKT HSJ3000-01-010
I001	T900956	LE33CZ TO92
I003	E730301	IC M15_IF2
I003A	E823935	52WAY IC SKT ~ FELCO
I004	T900779	74HC595
I006	T900989	M24C16-W SMT
I007	T900980	M62703ML
I302	T900762	IC 4053 SO16N
I303	T900762	IC 4053 SO16N
I304	T900762	IC 4053 SO16N
I401A	E823933	*64 PIN SKT 1179976441005
I402	T900902	OP AMPS NJM3403 SMT
I403	T900960	NJM3404
I501	T900959	TDA8879
I601	T900951	TDA8358J
I601A	H235475	HEATSINK A20
I601B	G884020	SPRING CLIP 56379-MULLARD
I900	T900452	UC3844 SGS/UNITRODE
I902	T900815	& UC3843N SGS
I903	T901000	L78M05CV 500MA REGULATOR
I903A	H224085	F9-4-220D-2LS
I904	T900345	REG 7805 SGS/MOTO/NEC
I904A	G884023	SPRING CLIP
I905	T900963	IC VIPER 20
I905A	H224085	F9-4-220D-2LS
I943	T900796	&TL431CZ-AP SGS
I964	T548013	CNY17F1/6 SIEMENS BEABT
I997	T548016	PC817B OPTO BEAB
I998	T548016	PC817B OPTO BEAB
I999	T548013	CNY17F1/6 SIEMENS BEABT
IA01	T900955	TDA7490L
IA04	T900978	TDA2822D SO8
IR01	T549018	& IR REC TSOP2838UH1 TEMIC
K118	J0796491R	RMC73M-000R
K12	J0195250R	RMC73S 000R
K120	J0195248R	RMC73--000R
K121	J0195248R	RMC73--000R
K126	J0796491R	RMC73M-000R
K129	J0195250R	RMC73S 000R
K132	J0195248R	RMC73--000R
K133	J0796491R	RMC73M-000R
K135	J0195248R	RMC73--000R
K136	J0195248R	RMC73--000R
K137	J0796491R	RMC73M-000R
K139	J0195248R	RMC73--000R
K141	J0195250R	RMC73S 000R
K142	J0195250R	RMC73S 000R
K146	J0195248R	RMC73--000R
K152	J0195250R	RMC73S 000R
K157	J0195248R	RMC73--000R
K16	J0195250R	RMC73S 000R
K161	J0195248R	RMC73--000R
K165	J0195248R	RMC73--000R
K166	J0796491R	RMC73M-000R
K167	J0195250R	RMC73S 000R
K168	J0195250R	RMC73S 000R
K170	J0796491R	RMC73M-000R
K171	J0195248R	RMC73--000R
K175	J0195250R	RMC73S 000R
K176	J0195250R	RMC73S 000R
K182	J0796491R	RMC73M-000R
K183	J0796491R	RMC73M-000R
K189	J0796491R	RMC73M-000R
K192	J0796491R	RMC73M-000R
K197	J0195248R	RMC73--000R
K198	J0195248R	RMC73--000R
K199	J0195250R	RMC73S 000R
K20	J0195250R	RMC73S 000R
K200	J0195248R	RMC73--000R
K202	J0195250R	RMC73S 000R
K203	J0195248R	RMC73--000R
K206	J0796491R	RMC73M-000R
K216	J0796491R	RMC73M-000R
K220	J0796491R	RMC73M-000R
K225	J0195248R	RMC73--000R
K231	J0195248R	RMC73--000R
K233	J0195250R	RMC73S 000R
K236	J0195250R	RMC73S 000R
K237	J0195250R	RMC73S 000R
K240	J0195250R	RMC73S 000R
K241	J0195250R	RMC73S 000R
K242	J0195250R	RMC73S 000R
K243	J0195250R	RMC73S 000R
K25	J0195248R	RMC73--000R
K262	J0195250R	RMC73S 000R
K266	J0195250R	RMC73S 000R
K267	J0796491R	RMC73M-000R
K271	J0796491R	RMC73M-000R
K288	J0195248R	RMC73--000R
K289	J0796491R	RMC73M-000R
K293	J0195248R	RMC73--000R
K299	J0796491R	RMC73M-000R
K300	J0195250R	RMC73S 000R
K303	J0195250R	RMC73S 000R
K310	J0195250R	RMC73S 000R
K333	J0796491R	RMC73M-000R
K341	J0195248R	RMC73--000R
K343	J0195248R	RMC73--000R
K345	J0796491R	RMC73M-000R
K346	J0796491R	RMC73M-000R
K350	J0195248R	RMC73--000R
K39	J0195250R	RMC73S 000R
K405	J0796491R	RMC73M-000R
K504	J0195250R	RMC73S 000R
K510	J0796491R	RMC73M-000R
K512	J0195248R	RMC73--000R
K513	J0796491R	RMC73M-000R
K64	J0195250R	RMC73S 000R
K66	J0195248R	RMC73--000R
K67	J0195248R	RMC73--000R

A529370 PARTS LIST

I.D.	Part No.	Description
K68	J0796491R	RMC73M-000R
K84	J0195248R	RMC73--000R
K85	J0195250R	RMC73S 000R
K86	J0195250R	RMC73S 000R
K87	A306099	BRACKET ASSEMBLY
K88	J0195248R	RMC73--000R
KVR900	W024001	0.56ML SFT TIN'D COP WIRE
L001	J2122943M	AXIAL COIL 10UH-J
L002	J2122943M	AXIAL COIL 10UH-J
L003	J2122943M	AXIAL COIL 10UH-J
L200	J0195250R	RMC73S 000R
L201	J0195250R	RMC73S 000R
L202	J0195250R	RMC73S 000R
L203	J0195250R	RMC73S 000R
L204	J0195250R	RMC73S 000R
L205	J0195250R	RMC73S 000R
L208	J0195250R	RMC73S 000R
L210	J0195250R	RMC73S 000R
L256	J2123781R	FILTER COIL EL101K
L309	L420187	BLM11A102S
L310	L420187	BLM11A102S
L311	J0796491R	RMC73M-000R
L312	J0195250R	RMC73S 000R
L313	J0796491R	RMC73M-000R
L314	J0796491R	RMC73M-000R
L315	J0796491R	RMC73M-000R
L317	J0796491R	RMC73M-000R
L318	J0796491R	RMC73M-000R
L330	J2122956M	COIL LAL 100UH K
L331	J0796491R	RMC73M-000R
L333	L420187	BLM11A102S
L334	L420187	BLM11A102S
L335	J0195250R	RMC73S 000R
L336	J0796491R	RMC73M-000R
L337	J0796491R	RMC73M-000R
L338	J0796491R	RMC73M-000R
L340	J0796491R	RMC73M-000R
L341	J0796491R	RMC73M-000R
L348	J0796491R	RMC73M-000R
L349	J2123781R	FILTER COIL EL101K
L350	J2123781R	FILTER COIL EL101K
L351	J2123781R	FILTER COIL EL101K
L358	J0796491R	RMC73M-000R
L400	J2123781R	FILTER COIL EL101K
L419	L420187	BLM11A102S
L420	J2122943M	AXIAL COIL 10UH-J
L422	L420187	BLM11A102S
L423	J2122943M	AXIAL COIL 10UH-J
L443	L420187	BLM11A102S
L444	J2122943M	AXIAL COIL 10UH-J
L446	L420187	BLM11A102S
L447	J2122943M	AXIAL COIL 10UH-J
L451	J2122253M	AXIAL COIL 100uH K TAPE
L452	J2122253M	AXIAL COIL 100uH K TAPE
L453	J2122253M	AXIAL COIL 100uH K TAPE
L540	J2123781R	FILTER COIL EL101K
L553	J2123781R	FILTER COIL EL101K
L601	J2123462M	FERRITE BEADS TYPE B2.3UH
L602	L300002	RL8010-100J-UL-HUK-B06
L604	L300002	RL8010-100J-UL-HUK-B06
L700	JBH00039	HC-820KS1 (LHL10)
L701	J2123461M	FERRITE BEAD 0.8uH
L702	L380178	LIN COIL ISKRA
L704	J2123461M	FERRITE BEAD 0.8uH
L705	J2123462M	FERRITE BEADS TYPE B2.3UH
L751	L380117	BRIDGE COIL 5MH
L752	L380147	&BRIDGE COIL
L900	L210068	M/FILTER 97192 RIFA BEAB
L901	L210068	M/FILTER 97192 RIFA BEAB
L902	J2123462M	FERRITE BEADS TYPE B2.3UH
L903	J2123462M	FERRITE BEADS TYPE B2.3UH
L904	J2125579	CHOKE COIL 47UH
L905	J2123462M	FERRITE BEADS TYPE B2.3UH
L909	J2123462M	FERRITE BEADS TYPE B2.3UH
L911	L300005	RL8010-180J-UL-HUK-B06
L921	J2123462M	FERRITE BEADS TYPE B2.3UH
L931	J2123462M	FERRITE BEADS TYPE B2.3UH
L932	J2123462M	FERRITE BEADS TYPE B2.3UH
L935	J2123462M	FERRITE BEADS TYPE B2.3UH
L939	J2123462M	FERRITE BEADS TYPE B2.3UH
L955	J2123462M	FERRITE BEADS TYPE B2.3UH
L957	J2123462M	FERRITE BEADS TYPE B2.3UH
L961	L380184	BUCK COIL E20/10/5
L965	J2123462M	FERRITE BEADS TYPE B2.3UH
L992	J2123462M	FERRITE BEADS TYPE B2.3UH
LA01	JBH00034	HC-330K SI LH10TK
LA02	L380176	33UH PANASONIC ELC12E330
LA03	JBH00034	HC-330K SI LH10TK
LA04	L380176	33UH PANASONIC ELC12E330
LED2	T547049	SLR-325VC LED RED
LS04	J2123103M	LAL 02 AXIAL COIL 10uH
LS201	J2122956M	COIL LAL 100UH K
LS25	J2123103M	LAL 02 AXIAL COIL 10uH
LS31	J2123103M	LAL 02 AXIAL COIL 10uH
LS42	J2123103M	LAL 02 AXIAL COIL 10uH
LS50	J2123103M	LAL 02 AXIAL COIL 10uH
LS60	J2123103M	LAL 02 AXIAL COIL 10uH
P001	J2902261	PLG-02P2R5VPWB
P10	J2902261	PLG-02P2R5VPWB
P1015	J2902263	PLG-04P2R5VPWB
P302	J2902261	PLG-02P2R5VPWB
P303	J2902261	PLG-02P2R5VPWB
P400	J2902261	PLG-02P2R5VPWB
P701	J2661753	4 PIN PLUG WITH BASE
P802	J2902267	PLG-08P2R5V PWB
P803	J2902264	PLG-05P 2R5V PWB
P9	J2902261	PLG-02P2R5VPWB
P900	E825259	2 WAY MAIN HEADER UL BEAB
P902	J2661751	2P PIN PLUG & BASE
PA04	J2902263	PLG-04P2R5VPWB

A529370 PARTS LIST

I.D.	Part No.	Description
PHONO1	E826943	QUAD PHONO SKT
PHONO2	E826944	QUAD PHONO SKT
PS01	J2902261	PLG-02P2R5VPWB
Q002	T633153	2N7002 MOSFET
Q003	J2325691R	TRS 2SC2412K T146Q/R
Q004	J2325691R	TRS 2SC2412K T146Q/R
Q005	T633153	2N7002 MOSFET
Q006	J2325691R	TRS 2SC2412K T146Q/R
Q007	J2325691R	TRS 2SC2412K T146Q/R
Q008	J2325691R	TRS 2SC2412K T146Q/R
Q011	J2325691R	TRS 2SC2412K T146Q/R
Q200	J2325691R	TRS 2SC2412K T146Q/R
Q212	T631302	& DTC114YKAT146
Q213	T631302	& DTC114YKAT146
Q214	T631302	& DTC114YKAT146
Q215	T631302	& DTC114YKAT146
Q216	J2328161R	TRS 2SC4265JC02TR
Q217	J2325691R	TRS 2SC2412K T146Q/R
Q330	J2325781R	TRS 2SA1037K T146Q/R
Q332A	J2325781R	TRS 2SA1037K T146Q/R
Q400	J2325691R	TRS 2SC2412K T146Q/R
Q401	J2325691R	TRS 2SC2412K T146Q/R
Q402	J2325691R	TRS 2SC2412K T146Q/R
Q403	J2325691R	TRS 2SC2412K T146Q/R
Q412	J2325781R	TRS 2SA1037K T146Q/R
Q413	J2316691R	STC-DTC144EK T146
Q501	J2325781R	TRS 2SA1037K T146Q/R
Q505	J2325781R	TRS 2SA1037K T146Q/R
Q507	J2325691R	TRS 2SC2412K T146Q/R
Q508	J2325691R	TRS 2SC2412K T146Q/R
Q509	J2325781R	TRS 2SA1037K T146Q/R
Q605	J2325691R	TRS 2SC2412K T146Q/R
Q606	J2325781R	TRS 2SA1037K T146Q/R
Q631	T636077	&IRFS530A ISOL SAMSUNG
Q631A	G884023	SPRING CLIP
Q701	T633137	TRANS BF459 MULLARD/SES
Q702	T732016	P0109DA THYRISTOR SGS
Q711	J2325781R	TRS 2SA1037K T146Q/R
Q751	J2315451	TRS-BU2508AF
Q751A	G884020	SPRING CLIP 56379-MULLARD
Q777	J2315891R	TRS JC548B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235418	POWER HEATSINK(TERNEX)
Q903B	G884020	SPRING CLIP 56379-MULLARD
Q904	T636077	&IRFS530A ISOL SAMSUNG
Q911	T636077	&IRFS530A ISOL SAMSUNG
Q912	T631309	TRANS BC557B BANDED
Q913	T633133	TRANS BF422 BAND MULL/AEG
Q919	J2315921R	TRS JC558B
Q922	J2315891R	TRS JC548B
Q923	T900796	&TL431CZ-AP SGS
Q927	T636094	MOSFET IRF640
Q927A	H224085	F9-4-220D-2LS
Q929	W024001	0.56ML SFT TIN'D COP WIRE
Q932	T633133	TRANS BF422 BAND MULL/AEG

I.D.	Part No.	Description
Q951	J2315891R	TRS JC548B
Q964	T900473	SHUNT REG TL431CLP MOT/TEX
QA01	J2325691R	TRS 2SC2412K T146Q/R
QS11	J2325691R	TRS 2SC2412K T146Q/R
QS17	J2325781R	TRS 2SA1037K T146Q/R
QS20	J2325691R	TRS 2SC2412K T146Q/R
QS29	J2325781R	TRS 2SA1037K T146Q/R
QS31	J2325781R	TRS 2SA1037K T146Q/R
QS32	J2325691R	TRS 2SC2412K T146Q/R
QS40	J2325691R	TRS 2SC2412K T146Q/R
QS44	J2325781R	TRS 2SA1037K T146Q/R
QS51	J2325781R	TRS 2SA1037K T146Q/R
QS52	J2325691R	TRS 2SC2412K T146Q/R
QS60	J2325691R	TRS 2SC2412K T146Q/R
QS61	J2325781R	TRS 2SA1037K T146Q/R
R001	J0196093R	RMC73M-1F103JR
R002	J0196043R	RMC73M-1F101JR
R004	J0196093R	RMC73M-1F103JR
R005	J0196043R	RMC73M-1F101JR
R006	J0195883R	RMC73S 2A221JR
R007	J0195001R	RMC73 2B101JR
R008	J0196093R	RMC73M-1F103JR
R009	J0196093R	RMC73M-1F103JR
R010	J0196093R	RMC73M-1F103JR
R011	J0196093R	RMC73M-1F103JR
R012	J0196093R	RMC73M-1F103JR
R013	J0196043R	RMC73M-1F101JR
R014	J0196043R	RMC73M-1F101JR
R015	J0196043R	RMC73M-1F101JR
R016	J0196043R	RMC73M-1F101JR
R017	J0196093R	RMC73M-1F103JR
R018	J0196093R	RMC73M-1F103JR
R019	J0196086R	RMC73M-1F562JR
R020	J0196093R	RMC73M-1F103JR
R021	J0196068R	RMC73M-1F102JR
R022	J0196068R	RMC73M-1F102JR
R023	J0196068R	RMC73M-1F102JR
R024	J0195927R	RMC73S 2A123JR
R025	J0196095R	RMC73M - 1F123JR
R026	J0195032R	RMC73--2B393JR 1%
R027	J0196095R	RMC73M - 1F123JR
R028	J0195927R	RMC73S 2A123JR
R029	J0195933R	RMC73S 2A223JR
R030	J0195939R	RMC73S2A393JR
R031	J0195933R	RMC73S 2A223JR
R032	J0700054M	10K 1/16W C/FILM 5%
R033	J0196093R	RMC73M-1F103JR
R036	J0700054M	10K 1/16W C/FILM 5%
R037	J0195025R	RMC73 - 2B103JR
R038	J0196093R	RMC73M-1F103JR
R039	J0700049M	4K7 1/16W C/FILM 5%
R040	J0700041M	1K 1/16W C/FILM 5%
R041	J0700041M	1K 1/16W C/FILM 5%
R042	J0195875R	RMC73S 2A101JR
R043	J0700027M	100R 1/16W C/FILM 5%

A529370 PARTS LIST

I.D.	Part No.	Description
R044	J0700027M	100R 1/16W C/FILM 5%
R045	J0196043R	RMC73M-1F101JR
R046	J0700027M	100R 1/16W C/FILM 5%
R047	J0196051R	RMC73M-1F221JR
R048U	J0700027M	100R 1/16W C/FILM 5%
R052	J0195875R	RMC73S 2A101JR
R053	J0196043R	RMC73M-1F101JR
R054	J0195013R	RMC73 2B102JR
R055	J0195013R	RMC73 2B102JR
R056	J0195013R	RMC73 2B102JR
R057	J0196093R	RMC73M-1F103JR
R058	J0196093R	RMC73M-1F103JR
R059	J0196093R	RMC73M-1F103JR
R060	J0196093R	RMC73M-1F103JR
R061	J0196093R	RMC73M-1F103JR
R062	J0196093R	RMC73M-1F103JR
R063	J0196043R	RMC73M-1F101JR
R064	J0196093R	RMC73M-1F103JR
R065	J0196043R	RMC73M-1F101JR
R066	J0195894R	RMC73S2A621JR 620R
R067	J0196093R	RMC73M-1F103JR
R070	J0196093R	RMC73M-1F103JR
R071	J0196093R	RMC73M-1F103JR
R074	J0195925R	RMC73S 2A103JR
R075	J0195941R	RMC73S 2A473JR
R078	J0196093R	RMC73M-1F103JR
R079	J0196043R	RMC73M-1F101JR
R080	J0196043R	RMC73M-1F101JR
R081	J0196053R	RMC73M - 1F271JR
R082	J0196093R	RMC73M-1F103JR
R083	J0196043R	RMC73M-1F101JR
R084	J0196043R	RMC73M-1F101JR
R085	J0195875R	RMC73S 2A101JR
R090	J0700027M	100R 1/16W C/FILM 5%
R091	J0196043R	RMC73M-1F101JR
R092	J0196078R	RMC73M-1F272JR
R093	J0196043R	RMC73M-1F101JR
R094	J0196043R	RMC73M-1F101JR
R095	J0196043R	RMC73M-1F101JR
R096	J0196043R	RMC73M-1F101JR
R097	J0700027M	100R 1/16W C/FILM 5%
R098	R120330	100R 1/4W DRG NO
R099	J0196043R	RMC73M-1F101JR
R230	J0195918R	RMC73S 2A562JR
R257	J0700027M	100R 1/16W C/FILM 5%
R258	J0700027M	100R 1/16W C/FILM 5%
R259	J0195900R	RMC73S 2A102JR
R261	J0195250R	RMC73S 000R
R263	J0195885R	RMC73S 2A271JR
R264	J0195918R	RMC73S 2A562JR
R265	J0700038M	680R 1/16W C/FILM 5%
R266	J0196078R	RMC73M-1F272JR
R267	J0195018R	RMC73 2B272JR
R268	J0195910R	RMC73S-2A272JR
R269	J0195250R	RMC73S 000R
R270	J0195250R	RMC73S 000R
R271	J0195875R	RMC73S 2A101JR
R272	J0195920R	RMC73S 2A682JR
R273	J0196070R	RMC73M - 1F122JR
R274	J0196043R	RMC73M-1F101JR
R275	J0195893R	RMC73S 2A561JR
R276	J0195001R	RMC73 2B101JR
R277	J0195895R	RMC73S 2A681JR
R281	J0195885R	RMC73S 2A271JR
R282	J0195931R	RMC73S 2A183JR
R300	J0195943R	RMC73S-2A563JR
R303	J0195871R	RMC73S 2A750JR
R305	J0195871R	RMC73S 2A750JR
R306	J0195871R	RMC73S 2A750JR
R307	J0195875R	RMC73S 2A101JR
R309	J0195868R	RM73S 2A560JR 56R
R311	J0195871R	RMC73S 2A750JR
R314	J0195950R	RMC73S 2A104JR
R315	J0196093R	RMC73M-1F103JR
R317	J0195016R	RMC73--2B182JR 1K8 1206
R319	J0195001R	RMC73 2B101JR
R320	J0195871R	RMC73S 2A750JR
R321	J0196043R	RMC73M-1F101JR
R322	J0196043R	RMC73M-1F101JR
R323	J0195871R	RMC73S 2A750JR
R326	J0195871R	RMC73S 2A750JR
R330	J0195871R	RMC73S 2A750JR
R331	J0196043R	RMC73M-1F101JR
R332	J0195950R	RMC73S 2A104JR
R333	J0196043R	RMC73M-1F101JR
R334	J0195868R	RM73S 2A560JR 56R
R335	J0195871R	RMC73S 2A750JR
R336	J0196043R	RMC73M-1F101JR
R337	J0196043R	RMC73M-1F101JR
R338	J0195875R	RMC73S 2A101JR
R339	J0113722M	RDO5S2H750JB
R340	J0195875R	RMC73S 2A101JR
R342	J0195925R	RMC73S 2A103JR
R344	J0195906R	RMC73S--2A182JR
R346	J0700027M	100R 1/16W C/FILM 5%
R347	J0195001R	RMC73 2B101JR
R349	J0195875R	RMC73S 2A101JR
R350	J0195943R	RMC73S-2A563JR
R351	J0195895R	RMC73S 2A681JR
R352	J0196111R	RMC73M - 1F563JR
R353	J0195871R	RMC73S 2A750JR
R355	J0195871R	RMC73S 2A750JR
R356	J0195871R	RMC73S 2A750JR
R357	J0196093R	RMC73M-1F103JR
R358	J0195906R	RMC73S--2A182JR
R359	J0195871R	RMC73S 2A750JR
R360	J0196093R	RMC73M-1F103JR
R361	J0196093R	RMC73M-1F103JR
R389	J0196103R	RMC73M - 1F273JR
R390	J0195895R	RMC73S 2A681JR

A529370 PARTS LIST

I.D.	Part No.	Description
R400	J0195900R	RMC73S 2A102JR
R401	J0195950R	RMC73S 2A104JR
R402	J0195945R	RMC73S 2A683JR
R403	J0195875R	RMC73S 2A101JR
R404	J0195943R	RMC73S-2A563JR
R405	J0195943R	RMC73S-2A563JR
R406	J0196059R	RMC73M-1F471JR
R407	J0195875R	RMC73S 2A101JR
R408	J0196068R	RMC73M-1F102JR
R409	J0113725M	100R RES CARBON FILM 1/2W
R410	J0196072R	RMC73M-1F152JR
R411	J0195900R	RMC73S 2A102JR
R412	J0196113R	RMC73M - 1F683JR
R413	J0196059R	RMC73M-1F471JR
R414	J0196043R	RMC73M-1F101JR
R415	J0196059R	RMC73M-1F471JR
R416	J0196043R	RMC73M-1F101JR
R417	J0195037R	RMC73 2B104JR
R418	J0196043R	RMC73M-1F101JR
R419	J0195950R	RMC73S 2A104JR
R420	J0196066R	RMC73M - 1F911JR
R421	J0196061R	RMC73M-1F561JR 1608
R422	J0196066R	RMC73M - 1F911JR
R423	J0195950R	RMC73S 2A104JR
R424	J0195891R	RMC73S 2A471JR
R425	J0196074R	RMC73M-1F182JR 1K8 0603
R426	J0196043R	RMC73M-1F101JR
R427	J0196061R	RMC73M-1F561JR 1608
R428	J0196066R	RMC73M - 1F911JR
R429	J0196068R	RMC73M-1F102JR
R430	J0196061R	RMC73M-1F561JR 1608
R431	J0196043R	RMC73M-1F101JR
R432	J0196043R	RMC73M-1F101JR
R433	J0195875R	RMC73S 2A101JR
R434	J0195875R	RMC73S 2A101JR
R435	J0196066R	RMC73M - 1F911JR
R436	J0796491R	RMC73M-000R
R437	J0796491R	RMC73M-000R
R438	J0196061R	RMC73M-1F561JR 1608
R439	J0196061R	RMC73M-1F561JR 1608
R440	J0196066R	RMC73M - 1F911JR
R441	J0196084R	RMC73M-1F472JR
R442	J0700034M	330R 1/16W C/FILM 5%
R446	J0195950R	RMC73S 2A104JR
R447	J0195891R	RMC73S 2A471JR
R448	J0196043R	RMC73M-1F101JR
R454	J0195950R	RMC73S 2A104JR
R465	J0196093R	RMC73M-1F103JR
R467	J0196093R	RMC73M-1F103JR
R469	J0195875R	RMC73S 2A101JR
R470	J0195875R	RMC73S 2A101JR
R471	J0700027M	100R 1/16W C/FILM 5%
R472	J0195001R	RMC73 2B101JR
R473	J0195001R	RMC73 2B101JR
R474	J0196043R	RMC73M-1F101JR
R475	J0196043R	RMC73M-1F101JR
R476	J0196043R	RMC73M-1F101JR
R477	J0700027M	100R 1/16W C/FILM 5%
R478	J0700027M	100R 1/16W C/FILM 5%
R479	J0700027M	100R 1/16W C/FILM 5%
R480	J0700027M	100R 1/16W C/FILM 5%
R481	J0700027M	100R 1/16W C/FILM 5%
R482	J0700027M	100R 1/16W C/FILM 5%
R483	J0195875R	RMC73S 2A101JR
R484	J0195875R	RMC73S 2A101JR
R485	J0700027M	100R 1/16W C/FILM 5%
R486	J0195925R	RMC73S 2A103JR
R487	J0700027M	100R 1/16W C/FILM 5%
R488	J0195925R	RMC73S 2A103JR
R489	J0700027M	100R 1/16W C/FILM 5%
R490	J0700027M	100R 1/16W C/FILM 5%
R491	J0195925R	RMC73S 2A103JR
R492	J0195925R	RMC73S 2A103JR
R493	J0196068R	RMC73M-1F102JR
R496	J0196088R	RMC73M-1F682JR
R497	J0196105R	RMC73M-1F333JR
R498	J0196043R	RMC73M-1F101JR
R499	J0196051R	RMC73M-1F221JR
R500	J0195929R	RMC73S 2A153JR
R501	J0195025R	RMC73 - 2B103JR
R502	J0196090R	RMC73M-1F822JR 8K2 0603
R504	J0196088R	RMC73M-1F682JR
R509	J0195939R	RMC73S2A393JR
R532	J0195875R	RMC73S 2A101JR
R533	J0195900R	RMC73S 2A102JR
R534	J0195875R	RMC73S 2A101JR
R535	J0195875R	RMC73S 2A101JR
R536	J0195875R	RMC73S 2A101JR
R537	J0195875R	RMC73S 2A101JR
R538	J0700027M	100R 1/16W C/FILM 5%
R539	J0700027M	100R 1/16W C/FILM 5%
R540	J0195875R	RMC73S 2A101JR
R541	J0195248R	RMC73--000R
R542	J0700027M	100R 1/16W C/FILM 5%
R543	J0700027M	100R 1/16W C/FILM 5%
R544	J0195887R	RMC73S 2A331JR
R545	J0195875R	RMC73S 2A101JR
R546	J0196043R	RMC73M-1F101JR
R547	J0196043R	RMC73M-1F101JR
R548	J0195007R	RMC73--2B331JR
R549	J0195879R	RMC73S 2A151JR
R550	J0196049R	RMC73M-1F181JR 180R 0603
R560	J0195001R	RMC73 2B101JR
R571	J0196068R	RMC73M-1F102JR
R586	J0195891R	RMC73S 2A471JR
R589	J0195910R	RMC73S-2A272JR
R600	J0196093R	RMC73M-1F103JR
R602	J0113684M	RNL-2R2J1-02LT
R603	J0113684M	RNL-2R2J1-02LT
R605	J0700075M	390K 1/16W C/FILM 5%

A529370 PARTS LIST

I.D.	Part No.	Description
R606	J0195941R	RMC73S 2A473JR
R607	J0196043R	RMC73M-1F101JR
R608	J0195875R	RMC73S 2A101JR
R610	R232330	2K2 1/4W DRG NO
R611	R326330	360R 1/4W DRG NO
R612	R217330	27R 1/4W DRG NO
R613	R658330	680K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R616	J0196068R	RMC73M-1F102JR
R634	R232330	2K2 1/4W DRG NO
R635	R232330	2K2 1/4W DRG NO
R636	J0700051M	5K6 1/16W C/FILM 5%
R637	R120330	100R 1/4W DRG NO
R638	J0700049M	4K7 1/16W C/FILM 5%
R639	J0700049M	4K7 1/16W C/FILM 5%
R666	J0196068R	RMC73M-1F102JR
R667	J0700049M	4K7 1/16W C/FILM 5%
R702	R333330	3K3 1/4W DRG NO
R704	R648330	68K 1/4W DRG NO
R705	J0140931S	RSL-332J7WS(BSR-Z)
R706	R437571	4K7 2W 5% M02SL
R707	R135330	1K5 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R710	R217571	27R 2W 5% MO2SL
R710A	R217571	27R 2W 5% MO2SL
R711	R217571	27R 2W 5% MO2SL
R711A	R217571	27R 2W 5% MO2SL
R712	J0195925R	RMC73S 2A103JR
R713	J0100069M	RES FLM 1/8W 1.5K
R714	J0113748M	RD14S2H821JB
R715	J0110163S	RS08B3A562JS
R716	J0700054M	10K 1/16W C/FILM 5%
R717	J0700072M	220K 1/16W C/FILM 5%
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119649M	RN14S2B563FB(KOA)
R720	J0140933S	RSL-472J7WS(BSR-Z)
R724	J0110273S	RSO8B3D153JS
R725	R232570	2K2 1W 5% MO1SL
R731	R217571	27R 2W 5% MO2SL
R731A	R217571	27R 2W 5% MO2SL
R732	R217571	27R 2W 5% MO2SL
R732A	R217571	27R 2W 5% MO2SL
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R531330	5K1 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R738	R232330	2K2 1/4W DRG NO
R740	R457330	470K 1/4W DRG NO
R742	J0113735M	RD14S2H271JB
R745	R437330	4K7 1/4W DRG NO
R746	R120571	100R 2W 5% M02SL
R749	R242330	22K 1/4W DRG NO
R752	J0700074M	330K 1/16W C/FILM 5%
R757	J0700063M	47K 1/16W C/FILM 5%
R759	R536330	5K6 1/4W DRG NO
R764	R150330	100K 1/4W DRG NO
R765	J0700027M	100R 1/16W C/FILM 5%
R767	J0195875R	RMC73S 2A101JR
R768	J0196093R	RMC73M-1F103JR
R769	J0195902R	RMC73S 2A122JR
R770	R140730	10K 2% 1/4W MFR4
R776	J0700073M	270K 1/16W C/FILM 5%
R778	J0700056M	15K 1/16W C/FILM 5%
R779	R120571	100R 2W 5% M02SL
R780	R232330	2K2 1/4W DRG NO
R901	R242571	22K 2W M02S
R902	R546330	56K 1/4W DRG NO
R903	R222330	220R 1/4W DRG NO
R905	R150330	100K 1/4W DRG NO
R906	R130330	1K 1/4W DRG NO
R908	R130330	1K 1/4W DRG NO
R909	J0147642	RW99J3Y220JM 22R 7W
R911	R132725	1K2 MRS16T 1% M/F 1/16W
R912	R842736	82K 1% MF MFR4
R913	R447330	47K 1/4W DRG NO
R915	R658725	680K MRS16T 1% M/F
R916	J0700049M	4K7 1/16W C/FILM 5%
R917	R658725	680K MRS16T 1% M/F
R920	R140330	10K 1/4W DRG NO
R921	R546736	56K MFR4 1% 1/4W
R922	R247725	27K MRS16T1% M/FILM
R927	J0110281S	RS08B3D333JS
R932	R120330	100R 1/4W DRG NO
R933	J0700049M	4K7 1/16W C/FILM 5%
R941	R536330	5K6 1/4W DRG NO
R942	R521330	510R 1/4W DRG NO
R943	R120330	100R 1/4W DRG NO
R944	R244725	24K MRS16T 1% 1/16W
R945	R140725	10K MRS16T 1% M/FILM
R946	J0147544	RW99J3H150JM 15R 5W
R950	R433725	4K3 MRS16T 1/16W 1%
R951	R407330	4R7 1/4W DRG NO
R952	J0700058M	22K 1/16W C/FILM 5%
R953	J0700049M	4K7 1/16W C/FILM 5%
R954	J0700049M	4K7 1/16W C/FILM 5%
R956	R000618	0.5R 2W WIRE WOUND 5%
R957	R323330	330R 1/4W DRG NO
R958	R842736	82K 1% MF MFR4
R959	R556725	560K MRS16T 1% M/FILM
R960	R133725	1K3 MRS16T 1% M/FILM
R961	J0700052M	6K8 1/16W C/FILM 5%
R962	R130330	1K 1/4W DRG NO
R963	J0700041M	1K 1/16W C/FILM 5%
R966	R130330	1K 1/4W DRG NO
R967	J0700072M	220K 1/16W C/FILM 5%
R968	R000618	0.5R 2W WIRE WOUND 5%
R969	R242330	22K 1/4W DRG NO
R970	R120330	100R 1/4W DRG NO
R971	J0144050	ERF5ZK122 1K2 KOA RES 5W
R972	R150744	&100K 3W PRO3 M/F LANCET
R975	J0700041M	1K 1/16W C/FILM 5%

A529370 PARTS LIST

I.D.	Part No.	Description
R976	R323330	330R 1/4W DRG NO
R977	R120330	100R 1/4W DRG NO
R978	R323330	330R 1/4W DRG NO
R980	R100551	1R 1/4W FR8225(TDK)-BEAB-
R981	J0700064M	56K 1/16W C/FILM 5%
R982	R319330	39R 1/4W DRG NO
R985	J0187072M	2K0 1/16W PHILIPS
R986	R150330	100K 1/4W DRG NO
R987	R319330	39R 1/4W DRG NO
R988	J0700067M	100K 1/16W C/FILM 5%
R989	E441045	PTC TYPE 2322-662-96624
R990	R316330	36R 1/4W
R991	R353714	330K 1/2W METAL FLM-BEAB
R992	J0700058M	22K 1/16W C/FILM 5%
R993	J0700056M	15K 1/16W C/FILM 5%
R994	R323330	330R 1/4W DRG NO
R996	R427330	470R 1/4W DRG NO
R997	J0187092M	RD14S1J133JB
R998	R323571	330R 2W 5% MO2S F
R999	R170727	10M 1W VR68 UL BEAB
RA01	J0700027M	100R 1/16W C/FILM 5%
RA02	J0196093R	RMC73M-1F103JR
RA03	J0700047M	3K3 1/16W C/FILM 5%
RA04	J0700055M	12K 1/16W C/FILM 5%
RA05	R120330	100R 1/4W DRG NO
RA06	J0196101R	RMC73M-1F223JR 1608
RA07	J0196111R	RMC73M - 1F563JR
RA08	J0196113R	RMC73M - 1F683JR
RA09	J0196101R	RMC73M-1F223JR 1608
RA10	J0196111R	RMC73M - 1F563JR
RA11	J0196084R	RMC73M-1F472JR
RA12	J0196113R	RMC73M - 1F683JR
RA13	J0196093R	RMC73M-1F103JR
RA14	R120330	100R 1/4W DRG NO
RA15	J0196084R	RMC73M-1F472JR
RA16	J0196104R	RMC73M-1F303JR 30K 0603
RA17	J0195953R	RMC73S-2A134JR 130K
RA18	J0700012M	6R8 1/16W C/FILM 5%
RA19	J0195025R	RMC73 - 2B103JR
RA20	J0187086M	RD14S1J752JB
RA21	J0195025R	RMC73 - 2B103JR
RA22	J0187086M	RD14S1J752JB
RA23	J0196078R	RMC73M-1F272JR
RA24	J0700054M	10K 1/16W C/FILM 5%
RA25	J0196093R	RMC73M-1F103JR
RA26	J0195916R	RMC73S 2A472JR
RA27	R427748	470R 3W PRO3 5% TAPED
RA31	J0796491R	RMC73M-000R
RA32	J0196078R	RMC73M-1F272JR
RA33	J0195945R	RMC73S 2A683JR
RA34	J0195945R	RMC73S 2A683JR
RA35	J0195910R	RMC73S-2A272JR
RA36	J0196045R	RMC73M-1F121JR 120R 1608
RA37	J0196045R	RMC73M-1F121JR 120R 1608
RA38	J0196118R	RMC73M-1F104JR 100K
RA39	J0196030R	RMC73M-1F330JR 33R
RA40	J0196118R	RMC73M-1F104JR 100K
RA41	J0196030R	RMC73M-1F330JR 33R
RA45	J0113725M	100R RES CARBON FILM 1/2W
RM01	J0196043R	RMC73M-1F101JR
RM02	J0196043R	RMC73M-1F101JR
RM05	J0195001R	RMC73 2B101JR
RM06	J0196043R	RMC73M-1F101JR
RM07	J0700027M	100R 1/16W C/FILM 5%
RM08	J0196043R	RMC73M-1F101JR
RM09	J0196043R	RMC73M-1F101JR
RM10	J0196043R	RMC73M-1F101JR
RM13	J0196093R	RMC73M-1F103JR
RM14	J0196093R	RMC73M-1F103JR
RM15	J0195025R	RMC73 - 2B103JR
RM16	J0195025R	RMC73 - 2B103JR
RM17	J0196093R	RMC73M-1F103JR
RM51	J0700054M	10K 1/16W C/FILM 5%
RS16	J0195916R	RMC73S 2A472JR
RS17	J0196068R	RMC73M-1F102JR
RS18	J0196068R	RMC73M-1F102JR
RS19	J0196068R	RMC73M-1F102JR
RS20	J0195950R	RMC73S 2A104JR
RS21	J0195916R	RMC73S 2A472JR
RS22	J0196068R	RMC73M-1F102JR
RS23	J0195900R	RMC73S 2A102JR
RS24	J0195900R	RMC73S 2A102JR
RS25	J0196118R	RMC73M-1F104JR 100K
RS30	J0195900R	RMC73S 2A102JR
RS32	J0196068R	RMC73M-1F102JR
RS33	J0196118R	RMC73M-1F104JR 100K
RS35	J0196084R	RMC73M-1F472JR
RS38	J0196068R	RMC73M-1F102JR
RS40	J0700049M	4K7 1/16W C/FILM 5%
RS41	J0195900R	RMC73S 2A102JR
RS46	J0196118R	RMC73M-1F104JR 100K
RS47	J0196068R	RMC73M-1F102JR
RS49	J0700041M	1K 1/16W C/FILM 5%
RS50	J0196068R	RMC73M-1F102JR
RS51	J0196118R	RMC73M-1F104JR 100K
RS53	J0196068R	RMC73M-1F102JR
RS54	J0196068R	RMC73M-1F102JR
RS55	J0700049M	4K7 1/16W C/FILM 5%
RS60	J0196118R	RMC73M-1F104JR 100K
RS61	J0196084R	RMC73M-1F472JR
RS62	J0700041M	1K 1/16W C/FILM 5%
RS64	J0195900R	RMC73S 2A102JR
RS65	J0195900R	RMC73S 2A102JR
RS91	J0195871R	RMC73S 2A750JR
S001	E139506	5 WAY TACT SWITCH
SCART1	E826946	A20 DOUBLE SCART
SCART2	E826945	SINGLE SCART METALLO
SHROUD	X321241	&ACTUATOR SHROUD
SW900	J2634732	SWITCH SDD-FC BEAB
T700	JBW01041	FBT HFL1532G BEABT

A529370 PARTS LIST

I.D.	Part No.	Description
T702	J2260291U	H DRIVE TRANSFORMER TAW
T900	L380183	SMT4 +/- 17V BEAB
T902	L380181	SW MODE XXXX CT286D8 BEAB
VR904	E311108	500R POT HORIZONTAL TAPE
VR964	J0160211R	EVND8AA03B13-TAPE(PANA)
W002	EC5A100A	7/0.2MM S000030
W003	EC5A060A	7/0.2MM S000030
W005	EC530603	7/0.2MM S000010
W008	EC5A120A	7/0.2 S000030
W009	EC5A060A	7/0.2MM S000030
W010	EC530903	7/0.2MM S000029
W017	EC530503	7/0.2MM S000029
W018	EC530203	7/0.2MM S000010
W019	EC530603	7/0.2MM S000010
W020	EC530303	7/0.2MM S000010
W021	EC5A120A	7/0.2 S000030
W022	EC530903	7/0.2MM S000029
W023	EC530203	7/0.2MM S000010
W024	EC5A110A	7/0.2MM S000030
W025	EC531603	7/0.2 S000029
W026	EC531603	7/0.2 S000029
X001	E516081F	CRYSTAL 6MHZ
X200	E518054	K9453M
X219	E518053	K3953M
X305	L420187	BLM11A102S
X513	E516030F	12MHz X'TAL NDK 5MM LEG
Z005	T536219	BZX79B3V3~PHILIPS~
Z006	T536312	PDZ-B 3.6B 2% SMT ZENER
Z007	T536279	BZX284-C5V6 5% S MOUNT
Z008	T536279	BZX284-C5V6 5% S MOUNT
Z014	T536312	PDZ-B 3.6B 2% SMT ZENER
Z205	T536215	BZX 79C 33V~PHILIPS~
Z404	T536181	BZX79C 13V~PHILIPS~
Z501	T536184	BZX79C 9V1~PHILIPS~
Z502	T536184	BZX79C 9V1~PHILIPS~
Z503	T536184	BZX79C 9V1~PHILIPS~
Z504	T536184	BZX79C 9V1~PHILIPS~
Z505	T536284	BZX284-C9V1
Z506	T536284	BZX284-C9V1
Z507	T536277	BZX284-C 4V7 5%
Z600	T536178	BZX79C 3V3~PHILIPS~
Z601	T536178	BZX79C 3V3~PHILIPS~
Z603A	T536173	BZX79C18V~PHILIPS~
Z603B	T536215	BZX 79C 33V~PHILIPS~
Z604	T536259	BZX79C56V
Z607	T536284	BZX284-C9V1
Z608	T536284	BZX284-C9V1
Z610	T536173	BZX79C18V~PHILIPS~
Z615	T536172	BZX79C27V~PHILIPS~
Z616	T536280	BZX284-C6V2
Z703	T536235	BZX79B18V~PHILIPS~
Z713	J2339251M	HZS36-ILT
Z741	T536259	BZX79C56V
Z744	T536227	BZX79B7V5~PHILIPS~
Z900	T536266	BZV85-C27V
Z927	T536173	BZX79C18V~PHILIPS~
Z942	T536179	BZX79C 6V2~PHILIPS~
Z964	T536236	BZX79B22V~PHILIPS~
Z990	T536173	BZX79C18V~PHILIPS~
Z991	T536173	BZX79C18V~PHILIPS~
Z992	T536173	BZX79C18V~PHILIPS~
ZA01	T536279	BZX284-C5V6 5% S MOUNT
ZA08	T536268	BZV85-C22V
ZA10	T536172	BZX79C27V~PHILIPS~
ZR048A	W470200	1MM 1/D SLEEVING BLACK
ZR048B	W470200	1MM 1/D SLEEVING BLACK
ZS14	T536271	BZX284-C2V7
ZS25	T536271	BZX284-C2V7
ZS31	T536271	BZX284-C2V7
ZS42	T536271	BZX284-C2V7
ZS51	T536271	BZX284-C2V7
ZS60	T536271	BZX284-C2V7
ZZA08	W470200	1MM 1/D SLEEVING BLACK

A529445 PARTS LIST

I.D.	Part No.	Description
#01	H232031	TOP MSP CAN
#02	H212008	BOTTOM MSP CAN
B1	PC55601	MSP PCB BEAB
C1	J0893044R	CKM 103K500B CNT2125
C10	J0893123R	CC73MCH1H560JR
C11	J0893123R	CC73MCH1H560JR
C12	J0893033R	CKM152K500B
C13	J0893033R	CKM152K500B
C14	J0893248R	CKM-334Z160B-CNT1608
C15	J0228070R	MINI CHIP 470PF-J CH 50V
C16	J0228070R	MINI CHIP 470PF-J CH 50V
C17	C608886	& GRM40COG6R8D50PT 6.8PF
C18	C608886	& GRM40COG6R8D50PT 6.8PF
C19	J0800326R	CEL-101M160WMFT
C2	J0893027R	CKM-104K250B-CNT2125
C20	J0228062R	GRM40COG221J50PT
C21	J0251452	CAP ELECT SMT 10U 16V
C22	C009001	UWX1C101MCR1GB 100U/16VSMT
C23	J0893027R	CKM-104K250B-CNT2125
C24	J0251452	CAP ELECT SMT 10U 16V
C25	J0893027R	CKM-104K250B-CNT2125
C26	J0251452	CAP ELECT SMT 10U 16V
C27	J0251452	CAP ELECT SMT 10U 16V
C3	J0893135R	CC73MCH1H471JR 1608
C30	J0893031R	CKM 102K500B CNT2125
C31	J0893031R	CKM 102K500B CNT2125
C32	J0893044R	CKM 103K500B CNT2125
C33	J0228038R	CC73SCH1H220JR
C34	J0893031R	CKM 102K500B CNT2125
C35	J0893027R	CKM-104K250B-CNT2125
C36	J0893033R	CKM152K500B
C38	J0227219R	CK73B1H104KR 100N 1206
C39	J0893211R	CKM-152K500-CNT1608 1N5
C4	J0893044R	CKM 103K500B CNT2125
C40	J0228070R	MINI CHIP 470PF-J CH 50V
C42	J0228062R	GRM40COG221J50PT
C44	J0893031R	CKM 102K500B CNT2125
C45	J0893031R	CKM 102K500B CNT2125
C47	J0893031R	CKM 102K500B CNT2125
C48	J0893033R	CKM152K500B
C5	J0893044R	CKM 103K500B CNT2125
C50	J0893211R	CKM-152K500-CNT1608 1N5
C51	J0893135R	CC73MCH1H471JR 1608
C52	J0893199R	CKM-221K500B-CNT1608
C53	J0893033R	CKM152K500B
C54	J0228070R	MINI CHIP 470PF-J CH 50V
C55	J0228062R	GRM40COG221J50PT
C58	J0893179R	CKM-104K160B-CNT1608
C59	J0893044R	CKM 103K500B CNT2125
C6	J0893033R	CKM152K500B
C60	J0893197R	CKM-223K250B-CNT1608
C7	J0893033R	CKM152K500B
C8	J0228070R	MINI CHIP 470PF-J CH 50V
C9	J0228062R	GRM40COG221J50PT
CE1	J0251452	CAP ELECT SMT 10U 16V
CE2	J0251452	CAP ELECT SMT 10U 16V
CE4	J0251472R	CEM 3R3M500WCNT
DRG1	A529445/01/01	A20 MSP ASSY DRG1
DRG2	A529445/02/01	MSP ASSY DRG SHT 2
DRG3	A529445/03/01	MSP ASSY DRG SHT 3
I1	T900986	MAS3528E
I2	T900985	DPL4519G
I3	T900984	MSP4450G
K1	J0195250R	RMC73S 000R
K2	J0195250R	RMC73S 000R
K3	J0195250R	RMC73S 000R
K6	J0796491R	RMC73M-000R
K8	J0796491R	RMC73M-000R
L1	J2130414R	HLM IND 10UH SMT
LABEL	X870291	LABEL
MD1	A783827	CHASSIS LABEL PRINT SPEC
Q1	E516070	X'TAL 18.432MHZ
R1	J0195871R	RMC73S 2A750JR
R10	J0196043R	RMC73M-1F101JR
R11	J0196043R	RMC73M-1F101JR
R12	J0196043R	RMC73M-1F101JR
R13	J0196043R	RMC73M-1F101JR
R14	J0196043R	RMC73M-1F101JR
R15	J0196093R	RMC73M-1F103JR
R16	J0196043R	RMC73M-1F101JR
R17	J0196043R	RMC73M-1F101JR
R18	J0195925R	RMC73S 2A103JR
R19	J0195925R	RMC73S 2A103JR
R2	J0195871R	RMC73S 2A750JR
R21	J0196043R	RMC73M-1F101JR
R22	J0195891R	RMC73S 2A471JR
R23	J0196068R	RMC73M-1F102JR
R3	J0195875R	RMC73S 2A101JR
R4	J0195875R	RMC73S 2A101JR
R5	J0196043R	RMC73M-1F101JR
R6	J0196043R	RMC73M-1F101JR
R7	J0196043R	RMC73M-1F101JR
R8	J0195875R	RMC73S 2A101JR
R9	J0195875R	RMC73S 2A101JR
X1	E825985	32 WAY CONNECTOR STRIP
X10	J0195250R	RMC73S 000R
X11	E770091	EMI FILTER MURATA
X12	E770091	EMI FILTER MURATA
X13	E770091	EMI FILTER MURATA
X14	E770091	EMI FILTER MURATA
X15	E770091	EMI FILTER MURATA
X16	J0195250R	RMC73S 000R
X17	J0195250R	RMC73S 000R
X18	J0195250R	RMC73S 000R
X19	J0195250R	RMC73S 000R
X2	E770091	EMI FILTER MURATA
X20	J0195250R	RMC73S 000R
X3	E770091	EMI FILTER MURATA
X4	E770091	EMI FILTER MURATA
X5	E770091	EMI FILTER MURATA

A529445 PARTS LIST

I.D.	Part No.	Description
X6	J0195250R	RMC73S 000R
X7	E770091	EMI FILTER MURATA
X8	J0195250R	RMC73S 000R
X9	J0195250R	RMC73S 000R

A529448 PARTS LIST

I.D.	Part No.	Description
#15	E573018	FERRITE CLAMP CORE
#200	J3731082	PURSE LOCK
#27	L350016	FERRITE CORE
#270	J2123462M	FERRITE BEADS TYPE B2.3UH
#40	E573018	FERRITE CLAMP CORE
#4069	J3731082	PURSE LOCK
#4070	G864006	CABLE TIE T18R
#500	E573018	FERRITE CLAMP CORE
#5000	N937053	CHASSIS FRAME
#5071	G291311	3X12 BT SCREW (BLACK)
#5072	G291311	3X12 BT SCREW (BLACK)
#5073	G291311	3X12 BT SCREW (BLACK)
#5075	N332067	SPACER
#5076	G291311	3X12 BT SCREW (BLACK)
#67	J3731082	PURSE LOCK
#68	J3731082	PURSE LOCK
#802	G864006	CABLE TIE T18R
#E802	JBM00041	FERRITE CORES BP53RB
AV300	JEU00581	PHONO-S/VHS CONNECTOR
B001	PC55002	A20 MAIN PCB BEAB
C001	J0893179R	CKM-104K160B-CNT1608
C002	J0893027R	CKM-104K250B-CNT2125
C003	J0800271R	ELECT CAP 0.1UF 50V SMG
C004	J0800282R	CAP ELECTRO 2.2UF-M 50V
C005	J0800291R	CAP ELEC 10uF 16V SMG
C007	J0800282R	CAP ELECTRO 2.2UF-M 50V
C008	J0800291R	CAP ELEC 10uF 16V SMG
C009	J0800291R	CAP ELEC 10uF 16V SMG
C010	J0893179R	CKM-104K160B-CNT1608
C011	J0893179R	CKM-104K160B-CNT1608
C012	J0893027R	CKM-104K250B-CNT2125
C013	J0227219R	CK73B1H104KR 100N 1206
C014	J0800317R	CP ELECTRO 47UF SMG 16
C015	J0893179R	CKM-104K160B-CNT1608
C016	J0228042R	CC73SCH1H330JR
C017	J0228042R	CC73SCH1H330JR
C019	J0893222R	CKM-103K500B-CNT1608
C020	J0800271R	ELECT CAP 0.1UF 50V SMG
C202	J0800364F	CAP ELECT 1000UF 50V SMG
C203	J0800361F	CAP ELEC 1000UF-M SMG 16V
C204	J0227219R	CK73B1H104KR 100N 1206
C205	J0800317R	CP ELECTRO 47UF SMG 16
C206	J0893044R	CKM 103K500B CNT2125
C208	J0800291R	CAP ELEC 10uF 16V SMG
C209	J0893044R	CKM 103K500B CNT2125
C210	J0893222R	CKM-103K500B-CNT1608
C211	J0893123R	CC73MCH1H560JR
C212	J0893113R	CC73MCH1H100C
C213	J0893044R	CKM 103K500B CNT2125
C215	J0893222R	CKM-103K500B-CNT1608
C220	J0893044R	CKM 103K500B CNT2125
C301	J0800352R	ELEC CAP 470UF 10V SMG
C302	J0227009R	CK73B1H102KR 1N 1206
C303	J0893027R	CKM-104K250B-CNT2125
C304	J0893027R	CKM-104K250B-CNT2125
C305	J0880194R	0.1UF 50V +-5% (100N)
C309	J0800352R	ELEC CAP 470UF 10V SMG
C310	J0893031R	CKM 102K500B CNT2125
C312	J0893179R	CKM-104K160B-CNT1608
C313	J0893027R	CKM-104K250B-CNT2125
C318	J0893027R	CKM-104K250B-CNT2125
C324	J0893179R	CKM-104K160B-CNT1608
C325	J0893179R	CKM-104K160B-CNT1608
C326	J0893179R	CKM-104K160B-CNT1608
C327	J0880194R	0.1UF 50V +-5% (100N)
C328	J0893027R	CKM-104K250B-CNT2125
C329	J0893027R	CKM-104K250B-CNT2125
C331	J0800326R	CEL-101M160WMFT
C332	J0800317R	CP ELECTRO 47UF SMG 16
C345	J0227219R	CK73B1H104KR 100N 1206
C369	J0800326R	CEL-101M160WMFT
C370	J0893027R	CKM-104K250B-CNT2125
C371	J0800326R	CEL-101M160WMFT
C372	J0893027R	CKM-104K250B-CNT2125
C373	J0800326R	CEL-101M160WMFT
C374	J0227219R	CK73B1H104KR 100N 1206
C403	J0893126R	CCM-101J500CHCNT1608
C404	J0800294R	ELECT CAP 10UF 50V SMG
C405	J0893031R	CKM 102K500B CNT2125
C406	J0228054R	CC73SCH1H101JR
C407	J0800294R	ELECT CAP 10UF 50V SMG
C408	J0893031R	CKM 102K500B CNT2125
C410	J0227009R	CK73B1H102KR 1N 1206
C411	J0228054R	CC73SCH1H101JR
C412	J0893031R	CKM 102K500B CNT2125
C413	J0228054R	CC73SCH1H101JR
C414	J0800294R	ELECT CAP 10UF 50V SMG
C415	J0893031R	CKM 102K500B CNT2125
C416	J0800294R	ELECT CAP 10UF 50V SMG
C417	J0893208R	CKM-102K500B-CNT1608
C420	J0800291R	CAP ELEC 10uF 16V SMG
C422	J0893031R	CKM 102K500B CNT2125
C423	J0893027R	CKM-104K250B-CNT2125
C424	J0800291R	CAP ELEC 10uF 16V SMG
C425	J0893027R	CKM-104K250B-CNT2125
C431	J0227449R	CK73B1E334ZR 330N 25V
C432	J0227449R	CK73B1E334ZR 330N 25V
C433	J0227449R	CK73B1E334ZR 330N 25V
C434	J0227449R	CK73B1E334ZR 330N 25V
C438	J0893179R	CKM-104K160B-CNT1608
C439	C353883	GRM40Y5V334Z16PT
C441	J0227449R	CK73B1E334ZR 330N 25V
C442	J0227449R	CK73B1E334ZR 330N 25V
C443	J0893248R	CKM-334Z160B-CNT1608
C444	C353883	GRM40Y5V334Z16PT
C445	C353883	GRM40Y5V334Z16PT
C446	C353883	GRM40Y5V334Z16PT
C447	C353883	GRM40Y5V334Z16PT
C448	C353883	GRM40Y5V334Z16PT
C452	J0893197R	CKM-223K250B-CNT1608

A529448 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
C454	J0893027R	CKM-104K250B-CNT2125	C614	C150711	CAP 100N 36521104 100V POL
C457	J0796491R	RMC73M-000R	C616	J0800339F	CAP ELECT 220UF 63V
C461	J0893123R	CC73MCH1H560JR	C617	J0227009R	CK73B1H102KR 1N 1206
C462	J0893213R	CC73MCH1H222JR	C620	J0893027R	CKM-104K250B-CNT2125
C463	J0893179R	CKM-104K160B-CNT1608	C621	J0893208R	CKM-102K500B-CNT1608
C465	J0800294R	ELECT CAP 10UF 50V SMG	C624	C140711	10N 10% POLY CAPACITOR
C466	J0800353R	CAP ELECTRO 470UF 16V	C639	J0800292R	CAP ELECT 10UF 25V SMG
C467	J0800294R	ELECT CAP 10UF 50V SMG	C644	J0890092R	CAP CERAMIC 0.0022uF 50V
C468	J0893031R	CKM 102K500B CNT2125	C701	J0243507R	CK45B2H331KB
C469	J0893179R	CKM-104K160B-CNT1608	C702	J0257540F	ELEC CAP 4U7 250V
C470	J0893179R	CKM-104K160B-CNT1608	C703	C142760	12N 1.6KV R/EVOX PHE428
C471	J0800327R	ELECT CAP 100UF 25V SMG	C705	J0299994F	POLY CAP .022UF 5% 630V
C500	J0893039R	CKM 472K500B CNT 2125	C706	J0890087R	CAP CERAMIC 1000pf-B 50V
C501	J0800279R	ELECT CAP 1.UF 50V	C707	JAJ00141F	CC-332K202R-D 10P 3N3 2KV
C502	J0195250R	RMC73S 000R	C708	J0244505R	CER CAP 2n2-K 500V
C503	J0893044R	CKM 103K500B CNT2125	C709	J0253953R	CE04W2C2R2M
C504	J0800279R	ELECT CAP 1.UF 50V	C710	J0253953R	CE04W2C2R2M
C506	J0890087R	CAP CERAMIC 1000pf-B 50V	C711	C353764	&330N MKP379 44334
C508	J0893222R	CKM-103K500B-CNT1608	C712	C457764	&470N MKP379 44474
C509	J0893222R	CKM-103K500B-CNT1608	C713	C353764	&330N MKP379 44334
C510	J0227436R	0.22U +/-10% 1206 SMT	C714	C257764	& 270N 250V MKP379
C511	J0893206R	680PF +/-10% 0603 SMT	C715	J0243512R	CK45B2H821KB
C518	J0893048R	CKM-223K500B-CNT2125	C716	C140707	CAP 10N 365-51103 MULARD
C518U	C842711	CAP 82N 365 100V POLY	C719	J0257540F	ELEC CAP 4U7 250V
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V	C720	J0880033R	CQM-152K500HFT
C572	J0228066R	GRM40CDG331J50PT	C724	JAJ00121R	CK45-R3DD101K 100PF 2KV
C575	J0893027R	CKM-104K250B-CNT2125	C726	J0800336R	CAP ELEC 220UF M SMG 25V
C576	J0893048R	CKM-223K500B-CNT2125	C727	J0243507R	CK45B2H331KB
C577	J0893027R	CKM-104K250B-CNT2125	C732	J0800291R	CAP ELEC 10uF 16V SMG
C578	J0893027R	CKM-104K250B-CNT2125	C735U	J0880044R	CAP POLYESTER 0.01UF K50V
C579	J0893027R	CKM-104K250B-CNT2125	C737	C160708	1UF +-10% 250V 368-45105
C581	J0880016R	POLY CAP FLM 0.1UF 50V	C742	J0800337R	CEL-221M350WMFT
C582	J0893027R	CKM-104K250B-CNT2125	C743	J0880053R	CQ93M1H473KEB(MF) N/PAN
C583	J0195250R	RMC73S 000R	C747	J0250511R	CAP POLY 0.022UF PHILIPS
C585	J0800372F	CEL 332 M160WNL SMG 5MM	C748	JAJ00134R	CK45-R3DD102K 1N 2KV
C586	J0893027R	CKM-104K250B-CNT2125	C749	J0880194R	0.1UF 50V +-5% (100N)
C588	J0893027R	CKM-104K250B-CNT2125	C752	JAJ00129R	CK45-R3DD 471K
C589	J0893039R	CKM 472K500B CNT 2125	C764	J0800279R	ELECT CAP 1.UF 50V
C590	J0195250R	RMC73S 000R	C769	JAJ00134R	CK45-R3DD102K 1N 2KV
C591	J0195250R	RMC73S 000R	C770	J0800292R	CAP ELECT 10UF 25V SMG
C592	J0195250R	RMC73S 000R	C900	C150763	&100NF 20% X2 275V BEABT
C593	J0800279R	ELECT CAP 1.UF 50V	C901	J0262774N	0.22UF 250VAC X2 ~BEABT
C594	J0228038R	CC73SCH1H220JR	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
C595	J0228038R	CC73SCH1H220JR	C903	J0890083R	CK45 B1H471KB
C596	J0893027R	CKM-104K250B-CNT2125	C904	C648763	&68NF 20% X2 275V BEABT
C597	J0800372F	CEL 332 M160WNL SMG 5MM	C905	C001561	ELECT CAP 100UF 250V
C598	C457884	&GRM40X7R474K25PT 470N	C908	J0800329R	ELECT CAP 100UF 50V SMG
C599	J0893035R	CKM--222K500B CNT2125	C909	J0800352R	ELEC CAP 470UF 10V SMG
C602	J0800337R	CEL-221M350WMFT	C910	J0880044R	CAP POLYESTER 0.01UF K50V
C603	J0800329R	ELECT CAP 100UF 50V SMG	C911	J0800328R	CEL-101M350WMFT
C604	J0880044R	CAP POLYESTER 0.01UF K50V	C912	J0244505R	CER CAP 2n2-K 500V
C605	C150711	CAP 100N 36521104 100V POL	C913	J0800327R	ELECT CAP 100UF 25V SMG
C606	J0893027R	CKM-104K250B-CNT2125	C914	C005046	ELECT 1000UF 25V LXY
C607	J0893027R	CKM-104K250B-CNT2125	C915	J0800354R	470UF 25V SMG
C610	J0890092R	CAP CERAMIC 0.0022uF 50V	C916	C005046	ELECT 1000UF 25V LXY

A529448 PARTS LIST

I.D.	Part No.	Description
C917	J0880048R	CQT223K50MB (PANASONIC)
C918	C001561	ELECT CAP 100UF 250V
C919	J0890078R	CK45B1H221KB (MURATA)
C920	C001561	ELECT CAP 100UF 250V
C921	C001561	ELECT CAP 100UF 250V
C922	J0880037R	CQM332K500HFT
C923	J0880037R	CQM332K500HFT
C924	J0800294R	ELECT CAP 10UF 50V SMG
C925	JAJ00121R	CK45-R3DD101K 100PF 2KV
C926	JAJ00127R	CK45-R3DD 331K
C927	JAJ00121R	CK45-R3DD101K 100PF 2KV
C929	J0800327R	ELECT CAP 100UF 25V SMG
C931	JAJ00138F	CC-222K202R-DF 2N2 2KV
C932	J0880037R	CQM332K500HFT
C933	J0253491F	ELEC CAP 100UF 200V
C936	J0880051R	CQ93M1H333KEB PANASONIC
C942	J0880042R	CQ93M1H682KEB(MF) N/PAN
C950	J0259431F	ELEC CAP 220UF 200V
C951	J0800362F	CAP ELECT 1000UF 25V SMG
C952	J0800362F	CAP ELECT 1000UF 25V SMG
C953	J0243509R	CERAMIC CAP 470p 500V
C954	J0243509R	CERAMIC CAP 470p 500V
C955	JAJ00129R	CK45-R3DD 471K
C957	J0243509R	CERAMIC CAP 470p 500V
C959	J0800353R	CAP ELECTRO 470UF 16V
C960	J0244501R	CER CAP 1000PF-K 500V
C961	J0244501R	CER CAP 1000PF-K 500V
C962	J0244501R	CER CAP 1000PF-K 500V
C963	J0244501R	CER CAP 1000PF-K 500V
C964	J0243511R	CER CAP 680PF-K 500V
C967	J0243509R	CERAMIC CAP 470p 500V
C970	J0800345R	ELECT CAP 330UF 25V SMG
C971	J0880044R	CAP POLYESTER 0.01UF K50V
C977	J0243509R	CERAMIC CAP 470p 500V
C986	J0800328R	CEL-101M350WMFT
C987	J0800352R	ELEC CAP 470UF 10V SMG
C990	J0880048R	CQT223K50MB (PANASONIC)
C991	E884110	SPARK GAP 10N 2KV SDUK 16
C992	J0880044R	CAP POLYESTER 0.01UF K50V
C993	C150891	100N 500V CAP
C994	J0800327R	ELECT CAP 100UF 25V SMG
C995	J0880037R	CQM332K500HFT
C997	J0880031R	CQ93M1H102KEB (MF) N/PAN
C999	C232753	2N2 4KVAC PME294 UL BEABT
CA01U	J0880198R	POLY CAP 0.22UF-J 50V
CA02U	J0880198R	POLY CAP 0.22UF-J 50V
CA03	J0880198R	POLY CAP 0.22UF-J 50V
CA04	J0893031R	CKM 102K500B CNT2125
CA05	J0893031R	CKM 102K500B CNT2125
CA06	J0893118R	CCM-270J500CHCNT1608
CA07	C001550	4700UF 25V SMG S/LEG
CA08	J0893135R	CC73MCH1H471JR 1608
CA09	J0893179R	CKM-104K160B-CNT1608
CA10	J0893133R	CC73MCH1H331JR
CA11	J0893135R	CC73MCH1H471JR 1608

I.D.	Part No.	Description
CA12	J0893135R	CC73MCH1H471JR 1608
CA13	J0284623R	CEL-1R0M500WMFT(BP)E
CA14	C001550	4700UF 25V SMG S/LEG
CA15	C343882	GRM40X7R333K50-550
CA16	J0880198R	POLY CAP 0.22UF-J 50V
CA17	J0893208R	CKM-102K500B-CNT1608
CA18	J0893208R	CKM-102K500B-CNT1608
CA20	J0893027R	CKM-104K250B-CNT2125
CA21	J0228070R	MINI CHIP 470PF-J CH 50V
CA22	J0893133R	CC73MCH1H331JR
CA24	J0893027R	CKM-104K250B-CNT2125
CA25	J0880064R	CQM - 334J500HFT
CA27	J0893031R	CKM 102K500B CNT2125
CA28	J0284623R	CEL-1R0M500WMFT(BP)E
CA29	C343882	GRM40X7R333K50-550
CA30	J0893208R	CKM-102K500B-CNT1608
CA31	J0800291R	CAP ELEC 10uF 16V SMG
CA32	J0893179R	CKM-104K160B-CNT1608
CA33	J0893179R	CKM-104K160B-CNT1608
CA34	J0893222R	CKM-103K500B-CNT1608
CA35	J0800316R	47u 10V ELECT CAP SMG
CA36	J0800316R	47u 10V ELECT CAP SMG
CA37	J0800325R	CEL-101M100WMFT
CA38	J0800325R	CEL-101M100WMFT
CA39	J0893219R	CCM-682K500B-CNT1608
CA40	J0893042R	CKM 682K500B CNT2125
CA41	J0800325R	CEL-101M100WMFT
CA42	J0284623R	CEL-1R0M500WMFT(BP)E
CA44	J0284623R	CEL-1R0M500WMFT(BP)E
CS10B	JAA00381R	10UF 6.3V SMT 3216
CS11	J0228054R	CC73SCH1H101JR
CS12	J0893126R	CCM-101J500CHCNT1608
CS20	J0800326R	CEL-101M160WMFT
CS23B	JAA00381R	10UF 6.3V SMT 3216
CS24	J0893126R	CCM-101J500CHCNT1608
CS25	J0893126R	CCM-101J500CHCNT1608
CS31	J0893126R	CCM-101J500CHCNT1608
CS32	J0893126R	CCM-101J500CHCNT1608
CS33B	JAA00381R	10UF 6.3V SMT 3216
CS40B	JAA00381R	10UF 6.3V SMT 3216
CS44	J0893126R	CCM-101J500CHCNT1608
CS45	J0893126R	CCM-101J500CHCNT1608
CS51	J0893126R	CCM-101J500CHCNT1608
CS52	J0228054R	CC73SCH1H101JR
CS53B	JAA00381R	10UF 6.3V SMT 3216
CS60B	JAA00381R	10UF 6.3V SMT 3216
CS62	J0893126R	CCM-101J500CHCNT1608
CS63	J0893126R	CCM-101J500CHCNT1608
CS91	J0796491R	RMC73M-000R
CU01	J0800359R	CEL-102M100WMFT
D001	T531069	SHOTTKY 30V/200mA/BAT254
D002	T531067	DIODE BAS216 S/MOUNT
D003	T531067	DIODE BAS216 S/MOUNT
D004	T531069	SHOTTKY 30V/200mA/BAT254
D006	T531069	SHOTTKY 30V/200mA/BAT254

A529448 PARTS LIST

I.D.	Part No.	Description
D007	T531069	SHOTTKY 30V/200mA/BAT254
D008	T531069	SHOTTKY 30V/200mA/BAT254
D009	T531069	SHOTTKY 30V/200mA/BAT254
D011	J2343963M	MPG06J (TAPE) GI
D015	T531067	DIODE BAS216 S/MOUNT
D016	T531069	SHOTTKY 30V/200mA/BAT254
D017	T531069	SHOTTKY 30V/200mA/BAT254
D018	T531069	SHOTTKY 30V/200mA/BAT254
D206	T531067	DIODE BAS216 S/MOUNT
D208	T531067	DIODE BAS216 S/MOUNT
D209	T531067	DIODE BAS216 S/MOUNT
D301	T531068	DIODE MA723/TP PANASONIC
D501	T531067	DIODE BAS216 S/MOUNT
D502	T531056	DIODE BYV10-40 ~MULLARD
D503	T531056	DIODE BYV10-40 ~MULLARD
D507	T531067	DIODE BAS216 S/MOUNT
D508	J2348921M	DIODE 1N4531
D522	T531068	DIODE MA723/TP PANASONIC
D523	T531069	SHOTTKY 30V/200mA/BAT254
D601	J2348921M	DIODE 1N4531
D603	T531067	DIODE BAS216 S/MOUNT
D604	T431113	DIODE BYD33J MULL BEAB
D610	T431113	DIODE BYD33J MULL BEAB
D611	T431113	DIODE BYD33J MULL BEAB
D622	J2343962M	MPG06G
D645	T536259	BZX79C56V
D701	T431113	DIODE BYD33J MULL BEAB
D702	T431113	DIODE BYD33J MULL BEAB
D703	J2343941M	RGP10G
D706	T431117F	DIODE BY228 P/F PHILIPS
D707	T531086F	BYW96E
D708	J2336612	RU3AM
D711	T531086F	BYW96E
D713	T431113	DIODE BYD33J MULL BEAB
D714	T431113	DIODE BYD33J MULL BEAB
D715	J2348921M	DIODE 1N4531
D716	J2348921M	DIODE 1N4531
D735	T431113	DIODE BYD33J MULL BEAB
D739	J2348921M	DIODE 1N4531
D745	J2348921M	DIODE 1N4531
D904	J2348921M	DIODE 1N4531
D905	T431113	DIODE BYD33J MULL BEAB
D906	T431113	DIODE BYD33J MULL BEAB
D907	T531055	DIODE BAT85 SCHOTTKY MULL
D910	J2348921M	DIODE 1N4531
D911	J2348921M	DIODE 1N4531
D913	J2348921M	DIODE 1N4531
D914	J2348921M	DIODE 1N4531
D915	T431113	DIODE BYD33J MULL BEAB
D916	T431113	DIODE BYD33J MULL BEAB
D919	T531086F	BYW96E
D920	J2342711M	DIODE EM2A (SANKEN)
D921	J2342711M	DIODE EM2A (SANKEN)
D922	J2342711M	DIODE EM2A (SANKEN)
D923	J2342711M	DIODE EM2A (SANKEN)
D924	J2342711M	DIODE EM2A (SANKEN)
D925	T431122	DIODE BYV28-200~PHILIPS~
D927	J2348921M	DIODE 1N4531
D931	J2342711M	DIODE EM2A (SANKEN)
D933	T536259	BZX79C56V
D934	T431114	& BYD33M
D939	T431113	DIODE BYD33J MULL BEAB
D953	T431145	BYW29E-200
D953A	H224075	H/SINK F9-4-220 &TAG COL
D955	T431127	BYR29F-700
D955A	H235369	FI2-32-2LA-2 HEATSINK
D955B	G291023	M2.5x8 TAPTITE SCREW
D955C	G560333	M2.5 SPRING WASHER
D960	J2342711M	DIODE EM2A (SANKEN)
D961	J2342711M	DIODE EM2A (SANKEN)
D962	J2342711M	DIODE EM2A (SANKEN)
D963	J2342711M	DIODE EM2A (SANKEN)
D970	T431113	DIODE BYD33J MULL BEAB
D977	T431122	DIODE BYV28-200~PHILIPS~
D982	J2348921M	DIODE 1N4531
D984	T531053	DIODE IN4148 MULL/PHIL/ITT
D991	T431113	DIODE BYD33J MULL BEAB
D992	T431120	DIODE BYV27-150 ~MULLARD~
D994	T531055	DIODE BAT85 SCHOTTKY MULL
D995	T531053	DIODE IN4148 MULL/PHIL/ITT
D996	J2348921M	DIODE 1N4531
D997U	J2348921M	DIODE 1N4531
DA01	T531067	DIODE BAS216 S/MOUNT
DA02	J2348921M	DIODE 1N4531
DA03	T531067	DIODE BAS216 S/MOUNT
DS14	T531067	DIODE BAS216 S/MOUNT
DS25	T531067	DIODE BAS216 S/MOUNT
DS31	T531067	DIODE BAS216 S/MOUNT
DS42	T531067	DIODE BAS216 S/MOUNT
DS51	T531067	DIODE BAS216 S/MOUNT
DS60	T531067	DIODE BAS216 S/MOUNT
E002	E843366	OSD SHIELDED LEAD
E006	E843377	LEAD ASSY 7 WAY 320MM
E04	E843375	SPEAKER LEAD
E10	E846825	A5 SCREEN LD 2PIN EHUK
E20	E843353	2 WAY SHIELDED LEAD 330MM
E206	E843314	CPT EARTH LEAD
E207	E843314	CPT EARTH LEAD
E208	E843286	GROUND LEAD FEMALE
E30	E846825	A5 SCREEN LD 2PIN EHUK
E500	E843376	OSD SHIELDED LEAD
E601	J2661752	3P PLUG PIN/BASE UL BEAB
E802	E843351	A20 8 WAY CRT BASE LEAD
E803	E846902	A7 CRT BASE LEAD 550mm
F900	J2722446	FUS-4A T4AH 250V BEABT
F900A	J2721792	FUSE HOLDER UL/BEAB
F901	E882359	FUSE GLASS T2.0AL BEABT
F901A	J2721792	FUSE HOLDER UL/BEAB
HS01	E826160	H/P SKT HSJ3000-01-010
I001	T900956	LE33CZ TO92

A529448 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
I003	E730301	IC M15_IF2	K175	J0195250R	RMC73S 000R
I003A	E823935	52WAY IC SKT ~ FELCO	K176	J0195250R	RMC73S 000R
I004	T900779	74HC595	K182	J0796491R	RMC73M-000R
I006	T900989	M24C16-W SMT	K183	J0796491R	RMC73M-000R
I007	T900980	M62703ML	K189	J0796491R	RMC73M-000R
I302	T900762	IC 4053 SO16N	K192	J0796491R	RMC73M-000R
I303	T900762	IC 4053 SO16N	K197	J0195248R	RMC73--000R
I304	T900762	IC 4053 SO16N	K198	J0195248R	RMC73--000R
I402	T900902	OP AMPS NJM3403 SMT	K199	J0195250R	RMC73S 000R
I403	T900960	NJM3404	K20	J0195250R	RMC73S 000R
I501	T900959	TDA8879	K200	J0195248R	RMC73--000R
I601	T900951	TDA8358J	K202	J0195250R	RMC73S 000R
I601A	H235475	HEATSINK A20	K203	J0195248R	RMC73--000R
I601B	G884020	SPRING CLIP 56379-MULLARD	K206	J0796491R	RMC73M-000R
I900	T900452	UC3844 SGS/UNITRODE	K216	J0796491R	RMC73M-000R
I902	T900815	& UC3843N SGS	K220	J0796491R	RMC73M-000R
I903	T901000	L78M05CV 500MA REGULAT OR	K225	J0195248R	RMC73--000R
I903A	H224085	F9-4-220D-2LS	K231	J0195248R	RMC73--000R
I904	T900345	REG 7805 SGS/MOTO/NEC	K233	J0195250R	RMC73S 000R
I904A	G884023	SPRING CLIP	K236	J0195250R	RMC73S 000R
I905	T900963	IC VIPER 20	K237	J0195250R	RMC73S 000R
I905A	H224085	F9-4-220D-2LS	K240	J0195250R	RMC73S 000R
I943	T900796	&TL431CZ-AP SGS	K241	J0195250R	RMC73S 000R
I964	T548013	CNY17F1/6 SIEMENS BEABT	K242	J0195250R	RMC73S 000R
I997	T548016	PC817B OPTO BEAB	K243	J0195250R	RMC73S 000R
I998	T548016	PC817B OPTO BEAB	K25	J0195248R	RMC73--000R
I999	T548013	CNY17F1/6 SIEMENS BEABT	K262	J0195250R	RMC73S 000R
IA01	T900955	TDA7490L	K266	J0195250R	RMC73S 000R
IA04	T900978	TDA2822D SO8	K267	J0796491R	RMC73M-000R
IR01	T549018	& IR REC TSOP2838UH1 TEMIC	K271	J0796491R	RMC73M-000R
K118	J0796491R	RMC73M-000R	K288	J0195248R	RMC73--000R
K12	J0195250R	RMC73S 000R	K289	J0796491R	RMC73M-000R
K120	J0195248R	RMC73--000R	K293	J0195248R	RMC73--000R
K121	J0195248R	RMC73--000R	K299	J0796491R	RMC73M-000R
K126	J0796491R	RMC73M-000R	K300	J0195250R	RMC73S 000R
K129	J0195250R	RMC73S 000R	K303	J0195250R	RMC73S 000R
K132	J0195248R	RMC73--000R	K310	J0195250R	RMC73S 000R
K133	J0796491R	RMC73M-000R	K333	J0796491R	RMC73M-000R
K135	J0195248R	RMC73--000R	K341	J0195248R	RMC73--000R
K136	J0195248R	RMC73--000R	K343	J0195248R	RMC73--000R
K137	J0796491R	RMC73M-000R	K345	J0796491R	RMC73M-000R
K139	J0195248R	RMC73--000R	K346	J0796491R	RMC73M-000R
K141	J0195250R	RMC73S 000R	K350	J0195248R	RMC73--000R
K142	J0195250R	RMC73S 000R	K39	J0195250R	RMC73S 000R
K146	J0195248R	RMC73--000R	K405	J0796491R	RMC73M-000R
K152	J0195250R	RMC73S 000R	K504	J0195250R	RMC73S 000R
K157	J0195248R	RMC73--000R	K510	J0796491R	RMC73M-000R
K16	J0195250R	RMC73S 000R	K512	J0195248R	RMC73--000R
K161	J0195248R	RMC73--000R	K513	J0796491R	RMC73M-000R
K165	J0195248R	RMC73--000R	K64	J0195250R	RMC73S 000R
K166	J0796491R	RMC73M-000R	K66	J0195248R	RMC73--000R
K167	J0195250R	RMC73S 000R	K67	J0195248R	RMC73--000R
K168	J0195250R	RMC73S 000R	K68	J0796491R	RMC73M-000R
K170	J0796491R	RMC73M-000R	K84	J0195248R	RMC73--000R
K171	J0195248R	RMC73--000R	K85	J0195250R	RMC73S 000R

A529448 PARTS LIST

I.D.	Part No.	Description
K86	J0195250R	RMC73S 000R
K87	A306099	BRACKET ASSEMBLY
K88	J0195248R	RMC73--000R
KVR900	W024001	0.56ML SFT TIN'D COP WIRE
L001	J2122943M	AXIAL COIL 10UH-J
L002	J2122943M	AXIAL COIL 10UH-J
L003	J2122943M	AXIAL COIL 10UH-J
L200	J0195250R	RMC73S 000R
L201	J0195250R	RMC73S 000R
L202	J0195250R	RMC73S 000R
L203	J0195250R	RMC73S 000R
L204	J0195250R	RMC73S 000R
L205	J0195250R	RMC73S 000R
L208	J0195250R	RMC73S 000R
L210	J0195250R	RMC73S 000R
L256	J2123781R	FILTER COIL EL101K
L309	L420187	BLM11A102S
L310	L420187	BLM11A102S
L311	J0796491R	RMC73M-000R
L312	J0195250R	RMC73S 000R
L313	J0796491R	RMC73M-000R
L314	J0796491R	RMC73M-000R
L315	J0796491R	RMC73M-000R
L317	J0796491R	RMC73M-000R
L318	J0796491R	RMC73M-000R
L330	J2122956M	COIL LAL 100UH K
L331	J0796491R	RMC73M-000R
L333	L420187	BLM11A102S
L334	L420187	BLM11A102S
L335	J0195250R	RMC73S 000R
L336	J0796491R	RMC73M-000R
L337	J0796491R	RMC73M-000R
L338	J0796491R	RMC73M-000R
L340	J0796491R	RMC73M-000R
L341	J0796491R	RMC73M-000R
L348	J0796491R	RMC73M-000R
L349	J2123781R	FILTER COIL EL101K
L350	J2123781R	FILTER COIL EL101K
L351	J2123781R	FILTER COIL EL101K
L358	J0796491R	RMC73M-000R
L400	J2123781R	FILTER COIL EL101K
L419	L420187	BLM11A102S
L420	J2122943M	AXIAL COIL 10UH-J
L422	L420187	BLM11A102S
L423	J2122943M	AXIAL COIL 10UH-J
L443	L420187	BLM11A102S
L444	J2122943M	AXIAL COIL 10UH-J
L446	L420187	BLM11A102S
L447	J2122943M	AXIAL COIL 10UH-J
L451	J2122253M	AXIAL COIL 100uH K TAPE
L452	J2122253M	AXIAL COIL 100uH K TAPE
L453	J2122253M	AXIAL COIL 100uH K TAPE
L540	J2123781R	FILTER COIL EL101K
L553	J2123781R	FILTER COIL EL101K
L601	J2123462M	FERRITE BEADS TYPE B2.3UH
L602	L300002	RL8010-100J-UL-HUK-B06
L604	L300002	RL8010-100J-UL-HUK-B06
L700	JBH00039	HC-820KS1 (LHL10)
L701	J2123461M	FERRITE BEAD 0.8uH
L702	L380150	? LINEARITY COIL ISKRA
L704	J2123461M	FERRITE BEAD 0.8uH
L705	J2123462M	FERRITE BEADS TYPE B2.3UH
L751	L380117	BRIDGE COIL 5MH
L752	L380147	&BRIDGE COIL
L900	L210068	M/FILTER 97192 RIFA BEAB
L901	L210068	M/FILTER 97192 RIFA BEAB
L902	J2123462M	FERRITE BEADS TYPE B2.3UH
L903	J2123462M	FERRITE BEADS TYPE B2.3UH
L904	J2125579	CHOKE COIL 47UH
L905	J2123462M	FERRITE BEADS TYPE B2.3UH
L909	J2123462M	FERRITE BEADS TYPE B2.3UH
L911	L300005	RL8010-180J-UL-HUK-B06
L921	J2123462M	FERRITE BEADS TYPE B2.3UH
L931	J2123462M	FERRITE BEADS TYPE B2.3UH
L932	J2123462M	FERRITE BEADS TYPE B2.3UH
L935	J2123462M	FERRITE BEADS TYPE B2.3UH
L939	J2123462M	FERRITE BEADS TYPE B2.3UH
L955	J2123462M	FERRITE BEADS TYPE B2.3UH
L957	J2123462M	FERRITE BEADS TYPE B2.3UH
L961	L380184	BUCK COIL E20/10/5
L965	J2123462M	FERRITE BEADS TYPE B2.3UH
L992	J2123462M	FERRITE BEADS TYPE B2.3UH
LA01	JBH00034	HC-330K SI LH10TK
LA02	L380176	33UH PANASONIC ELC12E330
LA03	JBH00034	HC-330K SI LH10TK
LA04	L380176	33UH PANASONIC ELC12E330
LED2	T547049	SLR-325VC LED RED
LS04	J2123103M	LAL 02 AXIAL COIL 10uH
LS201	J2122956M	COIL LAL 100UH K
LS25	J2123103M	LAL 02 AXIAL COIL 10uH
LS31	J2123103M	LAL 02 AXIAL COIL 10uH
LS42	J2123103M	LAL 02 AXIAL COIL 10uH
LS50	J2123103M	LAL 02 AXIAL COIL 10uH
LS60	J2123103M	LAL 02 AXIAL COIL 10uH
P001	J2902261	PLG-02P2R5VPWB
P10	J2902261	PLG-02P2R5VPWB
P302	J2902261	PLG-02P2R5VPWB
P303	J2902261	PLG-02P2R5VPWB
P400	J2902261	PLG-02P2R5VPWB
P701	J2661753	4 PIN PLUG WITH BASE
P802	J2902267	PLG-08P2R5V PWB
P803	J2902264	PLG-05P 2R5V PWB
P9	J2902261	PLG-02P2R5VPWB
P900	E825259	2 WAY MAIN HEADER UL BEAB
P902	J2661751	2P PIN PLUG & BASE
PA04	J2902263	PLG-04P2R5VPWB
PHONO1	E826943	QUAD PHONO SKT
PHONO2	E826944	QUAD PHONO SKT
PS01	J2902261	PLG-02P2R5VPWB
Q002	T633153	2N7002 MOSFET

A529448 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
Q003	J2325691R	TRS 2SC2412K T146Q/R	QS17	J2325781R	TRS 2SA1037K T146Q/R
Q004	J2325691R	TRS 2SC2412K T146Q/R	QS20	J2325691R	TRS 2SC2412K T146Q/R
Q005	T633153	2N7002 MOSFET	QS29	J2325781R	TRS 2SA1037K T146Q/R
Q006	J2325691R	TRS 2SC2412K T146Q/R	QS31	J2325781R	TRS 2SA1037K T146Q/R
Q007	J2325691R	TRS 2SC2412K T146Q/R	QS32	J2325691R	TRS 2SC2412K T146Q/R
Q008	J2325691R	TRS 2SC2412K T146Q/R	QS40	J2325691R	TRS 2SC2412K T146Q/R
Q011	J2325691R	TRS 2SC2412K T146Q/R	QS44	J2325781R	TRS 2SA1037K T146Q/R
Q200	J2325691R	TRS 2SC2412K T146Q/R	QS51	J2325781R	TRS 2SA1037K T146Q/R
Q212	T631302	& DTC114YKAT146	QS52	J2325691R	TRS 2SC2412K T146Q/R
Q213	T631302	& DTC114YKAT146	QS60	J2325691R	TRS 2SC2412K T146Q/R
Q214	T631302	& DTC114YKAT146	QS61	J2325781R	TRS 2SA1037K T146Q/R
Q215	T631302	& DTC114YKAT146	R001	J0196093R	RMC73M-1F103JR
Q216	J2328161R	TRS 2SC4265JC02TR	R002	J0196043R	RMC73M-1F101JR
Q217	J2325691R	TRS 2SC2412K T146Q/R	R004	J0196093R	RMC73M-1F103JR
Q330	J2325781R	TRS 2SA1037K T146Q/R	R005	J0196043R	RMC73M-1F101JR
Q332A	J2325781R	TRS 2SA1037K T146Q/R	R006	J0195883R	RMC73S 2A221JR
Q400	J2325691R	TRS 2SC2412K T146Q/R	R007	J0195001R	RMC73 2B101JR
Q401	J2325691R	TRS 2SC2412K T146Q/R	R008	J0196093R	RMC73M-1F103JR
Q402	J2325691R	TRS 2SC2412K T146Q/R	R009	J0196093R	RMC73M-1F103JR
Q403	J2325691R	TRS 2SC2412K T146Q/R	R010	J0196093R	RMC73M-1F103JR
Q412	J2325781R	TRS 2SA1037K T146Q/R	R011	J0196093R	RMC73M-1F103JR
Q413	J2316691R	STC-DTC144EK T146	R012	J0196093R	RMC73M-1F103JR
Q501	J2325781R	TRS 2SA1037K T146Q/R	R013	J0196043R	RMC73M-1F101JR
Q505	J2325781R	TRS 2SA1037K T146Q/R	R014	J0196043R	RMC73M-1F101JR
Q507	J2325691R	TRS 2SC2412K T146Q/R	R015	J0196043R	RMC73M-1F101JR
Q508	J2325691R	TRS 2SC2412K T146Q/R	R016	J0196043R	RMC73M-1F101JR
Q509	J2325781R	TRS 2SA1037K T146Q/R	R017	J0196093R	RMC73M-1F103JR
Q605	J2325691R	TRS 2SC2412K T146Q/R	R018	J0196093R	RMC73M-1F103JR
Q606	J2325781R	TRS 2SA1037K T146Q/R	R019	J0196086R	RMC73M-1F562JR
Q631	T636077	&IRFS530A ISOL SAMSUNG	R020	J0196093R	RMC73M-1F103JR
Q631A	G884023	SPRING CLIP	R021	J0196068R	RMC73M-1F102JR
Q701	T633137	TRANS BF459 MULLARD/SES	R022	J0196068R	RMC73M-1F102JR
Q702	T732016	P0109DA THYRISTOR SGS	R023	J0196068R	RMC73M-1F102JR
Q711	J2325781R	TRS 2SA1037K T146Q/R	R024	J0195927R	RMC73S 2A123JR
Q751	J2315451	TRS-BU2508AF	R025	J0196095R	RMC73M - 1F123JR
Q751A	G884020	SPRING CLIP 56379-MULLARD	R026	J0195032R	RMC73--2B393JR 1%
Q777	J2315891R	TRS JC548B	R027	J0196095R	RMC73M - 1F123JR
Q903	T636072	BUT12AF NON SELECTED	R028	J0195927R	RMC73S 2A123JR
Q903A	H235417	POWER HEATSINK(COPPER)	R029	J0195933R	RMC73S 2A223JR
Q903B	G884020	SPRING CLIP 56379-MULLARD	R030	J0195939R	RMC73S2A393JR
Q904	T636077	&IRFS530A ISOL SAMSUNG	R031	J0195933R	RMC73S 2A223JR
Q911	T636077	&IRFS530A ISOL SAMSUNG	R032	J0700054M	10K 1/16W C/FILM 5%
Q912	T631309	TRANS BC557B BANDED	R033	J0196093R	RMC73M-1F103JR
Q913	T633133	TRANS BF422 BAND MULL/AEG	R036	J0700054M	10K 1/16W C/FILM 5%
Q919	J2315921R	TRS JC558B	R037	J0195025R	RMC73 - 2B103JR
Q922	J2315891R	TRS JC548B	R038	J0196093R	RMC73M-1F103JR
Q923	T900796	&TL431CZ-AP SGS	R039	J0700049M	4K7 1/16W C/FILM 5%
Q927	T636094	MOSFET IRF640	R040	J0700041M	1K 1/16W C/FILM 5%
Q927A	H224085	F9-4-220D-2LS	R041	J0700041M	1K 1/16W C/FILM 5%
Q929	W024001	0.56ML SFT TIN'D COP WIRE	R042	J0195875R	RMC73S 2A101JR
Q932	T633133	TRANS BF422 BAND MULL/AEG	R043	J0700027M	100R 1/16W C/FILM 5%
Q951	J2315891R	TRS JC548B	R044	J0700027M	100R 1/16W C/FILM 5%
Q964	T900473	SHUNT REG TL431CLP MOT/TEX	R045	J0196043R	RMC73M-1F101JR
QA01	J2325691R	TRS 2SC2412K T146Q/R	R046	J0700027M	100R 1/16W C/FILM 5%
QS11	J2325691R	TRS 2SC2412K T146Q/R	R047	J0196051R	RMC73M-1F221JR

A529448 PARTS LIST

I.D.	Part No.	Description
R048U	J0700027M	100R 1/16W C/FILM 5%
R052	J0195875R	RMC73S 2A101JR
R053	J0196043R	RMC73M-1F101JR
R054	J0195013R	RMC73 2B102JR
R055	J0195013R	RMC73 2B102JR
R056	J0195013R	RMC73 2B102JR
R057	J0196093R	RMC73M-1F103JR
R058	J0196093R	RMC73M-1F103JR
R059	J0196093R	RMC73M-1F103JR
R060	J0196093R	RMC73M-1F103JR
R061	J0196093R	RMC73M-1F103JR
R062	J0196093R	RMC73M-1F103JR
R063	J0196043R	RMC73M-1F101JR
R064	J0196093R	RMC73M-1F103JR
R065	J0196043R	RMC73M-1F101JR
R066	J0195894R	RMC73S2A621JR 620R
R067	J0196093R	RMC73M-1F103JR
R070	J0196093R	RMC73M-1F103JR
R071	J0196093R	RMC73M-1F103JR
R074	J0195925R	RMC73S 2A103JR
R075	J0195941R	RMC73S 2A473JR
R078	J0196093R	RMC73M-1F103JR
R079	J0196043R	RMC73M-1F101JR
R080	J0196043R	RMC73M-1F101JR
R081	J0196053R	RMC73M - 1F271JR
R082	J0196093R	RMC73M-1F103JR
R083	J0196043R	RMC73M-1F101JR
R084	J0196043R	RMC73M-1F101JR
R085	J0195875R	RMC73S 2A101JR
R090	J0700027M	100R 1/16W C/FILM 5%
R091	J0196043R	RMC73M-1F101JR
R092	J0196078R	RMC73M-1F272JR
R093	J0196043R	RMC73M-1F101JR
R094	J0196043R	RMC73M-1F101JR
R095	J0196043R	RMC73M-1F101JR
R096	J0196043R	RMC73M-1F101JR
R097	J0700027M	100R 1/16W C/FILM 5%
R098	R120330	100R 1/4W DRG NO
R099	J0196043R	RMC73M-1F101JR
R230	J0195918R	RMC73S 2A562JR
R257	J0700027M	100R 1/16W C/FILM 5%
R258	J0700027M	100R 1/16W C/FILM 5%
R259	J0195900R	RMC73S 2A102JR
R261	J0195250R	RMC73S 000R
R263	J0195885R	RMC73S 2A271JR
R264	J0195918R	RMC73S 2A562JR
R265	J0700038M	680R 1/16W C/FILM 5%
R266	J0196078R	RMC73M-1F272JR
R267	J0195018R	RMC73 2B272JR
R268	J0195910R	RMC73S-2A272JR
R269	J0195250R	RMC73S 000R
R270	J0195250R	RMC73S 000R
R271	J0195875R	RMC73S 2A101JR
R272	J0195920R	RMC73S 2A682JR
R273	J0196070R	RMC73M - 1F122JR
R274	J0196043R	RMC73M-1F101JR
R275	J0195893R	RMC73S 2A561JR
R276	J0195001R	RMC73 2B101JR
R277	J0195895R	RMC73S 2A681JR
R281	J0195885R	RMC73S 2A271JR
R282	J0195931R	RMC73S 2A183JR
R300	J0195943R	RMC73S-2A563JR
R303	J0195871R	RMC73S 2A750JR
R305	J0195871R	RMC73S 2A750JR
R306	J0195871R	RMC73S 2A750JR
R307	J0195875R	RMC73S 2A101JR
R309	J0195868R	RM73S 2A560JR 56R
R311	J0195871R	RMC73S 2A750JR
R314	J0195950R	RMC73S 2A104JR
R315	J0196093R	RMC73M-1F103JR
R317	J0195016R	RMC73--2B182JR 1K8 1206
R319	J0195001R	RMC73 2B101JR
R320	J0195871R	RMC73S 2A750JR
R321	J0196043R	RMC73M-1F101JR
R322	J0196043R	RMC73M-1F101JR
R323	J0195871R	RMC73S 2A750JR
R326	J0195871R	RMC73S 2A750JR
R330	J0195871R	RMC73S 2A750JR
R331	J0196043R	RMC73M-1F101JR
R332	J0195950R	RMC73S 2A104JR
R333	J0196043R	RMC73M-1F101JR
R334	J0195868R	RM73S 2A560JR 56R
R335	J0195871R	RMC73S 2A750JR
R336	J0196043R	RMC73M-1F101JR
R337	J0196043R	RMC73M-1F101JR
R338	J0195875R	RMC73S 2A101JR
R339	J0113722M	RDO5S2H750JB
R340	J0195875R	RMC73S 2A101JR
R342	J0195925R	RMC73S 2A103JR
R344	J0195906R	RMC73S--2A182JR
R346	J0700027M	100R 1/16W C/FILM 5%
R347	J0195001R	RMC73 2B101JR
R349	J0195875R	RMC73S 2A101JR
R350	J0195943R	RMC73S-2A563JR
R351	J0195895R	RMC73S 2A681JR
R352	J0196111R	RMC73M - 1F563JR
R353	J0195871R	RMC73S 2A750JR
R355	J0195871R	RMC73S 2A750JR
R356	J0195871R	RMC73S 2A750JR
R357	J0196093R	RMC73M-1F103JR
R358	J0195906R	RMC73S--2A182JR
R359	J0195871R	RMC73S 2A750JR
R360	J0196093R	RMC73M-1F103JR
R361	J0196093R	RMC73M-1F103JR
R389	J0196103R	RMC73M - 1F273JR
R390	J0195895R	RMC73S 2A681JR
R400	J0195900R	RMC73S 2A102JR
R401	J0195950R	RMC73S 2A104JR
R402	J0195945R	RMC73S 2A683JR
R403	J0195875R	RMC73S 2A101JR

A529448 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
R404	J0195943R	RMC73S-2A563JR	R479	J0700027M	100R 1/16W C/FILM 5%
R405	J0195943R	RMC73S-2A563JR	R480	J0700027M	100R 1/16W C/FILM 5%
R406	J0196059R	RMC73M-1F471JR	R481	J0700027M	100R 1/16W C/FILM 5%
R407	J0195875R	RMC73S 2A101JR	R482	J0700027M	100R 1/16W C/FILM 5%
R408	J0196068R	RMC73M-1F102JR	R483	J0195875R	RMC73S 2A101JR
R409	J0113725M	100R RES CARBON FILM 1/2W	R484	J0195875R	RMC73S 2A101JR
R410	J0196072R	RMC73M-1F152JR	R485	J0700027M	100R 1/16W C/FILM 5%
R411	J0195900R	RMC73S 2A102JR	R486	J0195925R	RMC73S 2A103JR
R412	J0196113R	RMC73M - 1F683JR	R487	J0700027M	100R 1/16W C/FILM 5%
R413	J0196059R	RMC73M-1F471JR	R488	J0195925R	RMC73S 2A103JR
R414	J0196043R	RMC73M-1F101JR	R489	J0700027M	100R 1/16W C/FILM 5%
R415	J0196059R	RMC73M-1F471JR	R490	J0700027M	100R 1/16W C/FILM 5%
R416	J0196043R	RMC73M-1F101JR	R491	J0195925R	RMC73S 2A103JR
R417	J0195037R	RMC73 2B104JR	R492	J0195925R	RMC73S 2A103JR
R418	J0196043R	RMC73M-1F101JR	R493	J0196068R	RMC73M-1F102JR
R419	J0195950R	RMC73S 2A104JR	R496	J0196088R	RMC73M-1F682JR
R420	J0196066R	RMC73M - 1F911JR	R497	J0196105R	RMC73M-1F333JR
R421	J0196061R	RMC73M-1F561JR 1608	R498	J0196043R	RMC73M-1F101JR
R422	J0196066R	RMC73M - 1F911JR	R499	J0196051R	RMC73M-1F221JR
R423	J0195950R	RMC73S 2A104JR	R500	J0195929R	RMC73S 2A153JR
R424	J0195891R	RMC73S 2A471JR	R501	J0195025R	RMC73 - 2B103JR
R425	J0196074R	RMC73M-1F182JR 1K8 0603	R502	J0196090R	RMC73M-1F822JR 8K2 0603
R426	J0196043R	RMC73M-1F101JR	R504	J0196088R	RMC73M-1F682JR
R427	J0196061R	RMC73M-1F561JR 1608	R509	J0195939R	RMC73S2A393JR
R428	J0196066R	RMC73M - 1F911JR	R532	J0195875R	RMC73S 2A101JR
R429	J0196068R	RMC73M-1F102JR	R533	J0195900R	RMC73S 2A102JR
R430	J0196061R	RMC73M-1F561JR 1608	R534	J0195875R	RMC73S 2A101JR
R431	J0196043R	RMC73M-1F101JR	R535	J0195875R	RMC73S 2A101JR
R432	J0196043R	RMC73M-1F101JR	R536	J0195875R	RMC73S 2A101JR
R433	J0195875R	RMC73S 2A101JR	R537	J0195875R	RMC73S 2A101JR
R434	J0195875R	RMC73S 2A101JR	R538	J0700027M	100R 1/16W C/FILM 5%
R435	J0196066R	RMC73M - 1F911JR	R539	J0700027M	100R 1/16W C/FILM 5%
R436	J0796491R	RMC73M-000R	R540	J0195875R	RMC73S 2A101JR
R437	J0796491R	RMC73M-000R	R541	J0195248R	RMC73--000R
R438	J0196061R	RMC73M-1F561JR 1608	R542	J0700027M	100R 1/16W C/FILM 5%
R439	J0196061R	RMC73M-1F561JR 1608	R543	J0700027M	100R 1/16W C/FILM 5%
R440	J0196066R	RMC73M - 1F911JR	R544	J0195887R	RMC73S 2A331JR
R441	J0196084R	RMC73M-1F472JR	R545	J0195875R	RMC73S 2A101JR
R442	J0700034M	330R 1/16W C/FILM 5%	R546	J0196043R	RMC73M-1F101JR
R446	J0195950R	RMC73S 2A104JR	R547	J0196043R	RMC73M-1F101JR
R447	J0195891R	RMC73S 2A471JR	R548	J0195007R	RMC73--2B331JR
R448	J0196043R	RMC73M-1F101JR	R549	J0195879R	RMC73S 2A151JR
R454	J0195950R	RMC73S 2A104JR	R550	J0196049R	RMC73M-1F181JR 180R 0603
R465	J0196093R	RMC73M-1F103JR	R560	J0195001R	RMC73 2B101JR
R467	J0196093R	RMC73M-1F103JR	R571	J0196068R	RMC73M-1F102JR
R469	J0195875R	RMC73S 2A101JR	R586	J0195891R	RMC73S 2A471JR
R470	J0195875R	RMC73S 2A101JR	R589	J0195910R	RMC73S-2A272JR
R471	J0700027M	100R 1/16W C/FILM 5%	R600	J0196093R	RMC73M-1F103JR
R472	J0195001R	RMC73 2B101JR	R601	R100330	1R0 1/4W DRG NO
R473	J0195001R	RMC73 2B101JR	R602	J0113684M	RNL-2R2J1-02LT
R474	J0196043R	RMC73M-1F101JR	R603	J0113684M	RNL-2R2J1-02LT
R475	J0196043R	RMC73M-1F101JR	R605	J0700075M	390K 1/16W C/FILM 5%
R476	J0196043R	RMC73M-1F101JR	R606	J0195941R	RMC73S 2A473JR
R477	J0700027M	100R 1/16W C/FILM 5%	R607	J0196043R	RMC73M-1F101JR
R478	J0700027M	100R 1/16W C/FILM 5%	R608	J0195875R	RMC73S 2A101JR

A529448 PARTS LIST

I.D.	Part No.	Description
R612	R237330	2K7 1/4W DRG NO
R613	R658330	680K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R616	J0196068R	RMC73M-1F102JR
R634	R232330	2K2 1/4W DRG NO
R635	R232330	2K2 1/4W DRG NO
R636	J0700051M	5K6 1/16W C/FILM 5%
R637	R120330	100R 1/4W DRG NO
R638	J0700049M	4K7 1/16W C/FILM 5%
R639	J0700049M	4K7 1/16W C/FILM 5%
R666	J0196068R	RMC73M-1F102JR
R667	J0700049M	4K7 1/16W C/FILM 5%
R702	R333330	3K3 1/4W DRG NO
R704	R648330	68K 1/4W DRG NO
R705	J0140933S	RSL-472J7WS(BSR-Z)
R706	R437571	4K7 2W 5% M02SL
R707	R135330	1K5 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R712	J0195925R	RMC73S 2A103JR
R713	J0100069M	RES FLM 1/8W 1.5K
R714	J0113748M	RD14S2H821JB
R715	J0110163S	RS08B3A562JS
R716	J0700054M	10K 1/16W C/FILM 5%
R717	R252330	220K 1/4W DRG NO
R718	R254736	240K 1/4W M/F MFR4 1%
R719	R447736	47K 1/4W 1% MFR4
R720	J0140933S	RSL-472J7WS(BSR-Z)
R724	J0110273S	RSO8B3D153JS
R725	R232570	2K2 1W 5% MO1SL
R735	J0147622	RW99J3Y3R3KM
R736	R433330	4K3 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R738	R232330	2K2 1/4W DRG NO
R740	R457330	470K 1/4W DRG NO
R745	R437330	4K7 1/4W DRG NO
R746	R120571	100R 2W 5% M02SL
R752	R353330	330K 1/4W DRG NO
R757	R447330	47K 1/4W DRG NO
R759	R536330	5K6 1/4W DRG NO
R764	R150330	100K 1/4W DRG NO
R765	J0700027M	100R 1/16W C/FILM 5%
R767	J0195875R	RMC73S 2A101JR
R768	J0196093R	RMC73M-1F103JR
R769	J0195902R	RMC73S 2A122JR
R770	R140330	10K 1/4W DRG NO
R776	R257330	270K 1/4W DRG NO
R778	R145330	15K 1/4W DRG NO
R779	R120571	100R 2W 5% M02SL
R780	R232330	2K2 1/4W DRG NO
R901	R242571	22K 2W M02S
R902	R546330	56K 1/4W DRG NO
R903	R222330	220R 1/4W DRG NO
R905	R150330	100K 1/4W DRG NO
R906	R130330	1K 1/4W DRG NO
R908	R130330	1K 1/4W DRG NO
R909	J0147642	RW99J3Y220JM 22R 7W
R911	R132725	1K2 MRS16T 1% M/F 1/16W
R912	R842736	82K 1% MF MFR4
R913	R447330	47K 1/4W DRG NO
R915	R658725	680K MRS16T 1% M/F
R916	J0700049M	4K7 1/16W C/FILM 5%
R917	R658725	680K MRS16T 1% M/F
R920	R140330	10K 1/4W DRG NO
R921	R546736	56K MFR4 1% 1/4W
R922	R247725	27K MRS16T1% M/FILM
R927	J0110281S	RS08B3D333JS
R932	R120330	100R 1/4W DRG NO
R933	J0700049M	4K7 1/16W C/FILM 5%
R941	R536330	5K6 1/4W DRG NO
R942	R521330	510R 1/4W DRG NO
R943	R120330	100R 1/4W DRG NO
R944	R244725	24K MRS16T 1% 1/16W
R945	R140725	10K MRS16T 1% M/FILM
R946	J0147544	RW99J3H150JM 15R 5W
R950	R433725	4K3 MRS16T 1/16W 1%
R951	R407330	4R7 1/4W DRG NO
R952	J0700058M	22K 1/16W C/FILM 5%
R953	J0700049M	4K7 1/16W C/FILM 5%
R954	J0700049M	4K7 1/16W C/FILM 5%
R956	R000618	0.5R 2W WIRE WOUND 5%
R957	R323330	330R 1/4W DRG NO
R958	R842736	82K 1% MF MFR4
R959	R556725	560K MRS16T 1% M/FILM
R960	R133725	1K3 MRS16T 1% M/FILM
R961	J0700052M	6K8 1/16W C/FILM 5%
R962	R130330	1K 1/4W DRG NO
R963	J0700041M	1K 1/16W C/FILM 5%
R966	R130330	1K 1/4W DRG NO
R967	R252330	220K 1/4W DRG NO
R968	R000618	0.5R 2W WIRE WOUND 5%
R969	R242330	22K 1/4W DRG NO
R970	R120330	100R 1/4W DRG NO
R971	J0144050	ERF5ZK122 1K2 KOA RES 5W
R972	R150744	&100K 3W PRO3 M/F LANCET
R975	J0700041M	1K 1/16W C/FILM 5%
R976	R323330	330R 1/4W DRG NO
R977	R120330	100R 1/4W DRG NO
R978	R323330	330R 1/4W DRG NO
R980	R100551	1R 1/4W FR8225(TDK)-BEAB-
R981	J0700064M	56K 1/16W C/FILM 5%
R982	R319330	39R 1/4W DRG NO
R985	J0187072M	2K0 1/16W PHILIPS
R986	R150330	100K 1/4W DRG NO
R987	R319330	39R 1/4W DRG NO
R988	J0700067M	100K 1/16W C/FILM 5%
R989	E441045	PTC TYPE 2322-662-96624
R990	R316330	36R 1/4W
R991	R353714	330K 1/2W METAL FLM-BEAB
R992	J0700058M	22K 1/16W C/FILM 5%
R993	J0700056M	15K 1/16W C/FILM 5%

A529448 PARTS LIST

I.D.	Part No.	Description
R994	R323330	330R 1/4W DRG NO
R996	R427330	470R 1/4W DRG NO
R997	J0187092M	RD14S1J133JB
R998	R323571	330R 2W 5% MO2S F
R999	R170727	10M 1W VR68 UL BEAB
RA01	J0700027M	100R 1/16W C/FILM 5%
RA02	J0196093R	RMC73M-1F103JR
RA03	J0700047M	3K3 1/16W C/FILM 5%
RA04	J0700055M	12K 1/16W C/FILM 5%
RA05	R120330	100R 1/4W DRG NO
RA06	J0196101R	RMC73M-1F223JR 1608
RA07	J0196111R	RMC73M - 1F563JR
RA08	J0196113R	RMC73M - 1F683JR
RA09	J0196101R	RMC73M-1F223JR 1608
RA10	J0196111R	RMC73M - 1F563JR
RA11	J0196084R	RMC73M-1F472JR
RA12	J0196113R	RMC73M - 1F683JR
RA13	J0196093R	RMC73M-1F103JR
RA14	R120330	100R 1/4W DRG NO
RA15	J0196084R	RMC73M-1F472JR
RA16	J0196104R	RMC73M-1F303JR 30K 0603
RA17	J0195953R	RMC73S-2A134JR 130K
RA18	J0700012M	6R8 1/16W C/FILM 5%
RA19	J0195025R	RMC73 - 2B103JR
RA20	J0187086M	RD14S1J752JB
RA21	J0195025R	RMC73 - 2B103JR
RA22	J0187086M	RD14S1J752JB
RA23	J0196078R	RMC73M-1F272JR
RA24	J0700054M	10K 1/16W C/FILM 5%
RA25	J0196093R	RMC73M-1F103JR
RA26	J0195916R	RMC73S 2A472JR
RA27	R427748	470R 3W PRO3 5% TAPED
RA31	J0796491R	RMC73M-000R
RA32	J0196078R	RMC73M-1F272JR
RA33	J0195945R	RMC73S 2A683JR
RA34	J0195945R	RMC73S 2A683JR
RA35	J0195910R	RMC73S-2A272JR
RA36	J0196045R	RMC73M-1F121JR 120R 1608
RA37	J0196045R	RMC73M-1F121JR 120R 1608
RA38	J0196118R	RMC73M-1F104JR 100K
RA39	J0196030R	RMC73M-1F330JR 33R
RA40	J0196118R	RMC73M-1F104JR 100K
RA41	J0196030R	RMC73M-1F330JR 33R
RA45	J0113725M	100R RES CARBON FILM 1/2W
RM01	J0196043R	RMC73M-1F101JR
RM02	J0196043R	RMC73M-1F101JR
RM05	J0195001R	RMC73 2B101JR
RM06	J0196043R	RMC73M-1F101JR
RM07	J0700027M	100R 1/16W C/FILM 5%
RM08	J0196043R	RMC73M-1F101JR
RM09	J0196043R	RMC73M-1F101JR
RM10	J0196043R	RMC73M-1F101JR
RM13	J0196093R	RMC73M-1F103JR
RM14	J0196093R	RMC73M-1F103JR
RM15	J0195025R	RMC73 - 2B103JR
RM16	J0195025R	RMC73 - 2B103JR
RM17	J0196093R	RMC73M-1F103JR
RM51	J0700054M	10K 1/16W C/FILM 5%
RS16	J0195916R	RMC73S 2A472JR
RS17	J0196068R	RMC73M-1F102JR
RS18	J0196068R	RMC73M-1F102JR
RS19	J0196068R	RMC73M-1F102JR
RS20	J0195950R	RMC73S 2A104JR
RS21	J0195916R	RMC73S 2A472JR
RS22	J0196068R	RMC73M-1F102JR
RS23	J0195900R	RMC73S 2A102JR
RS24	J0195900R	RMC73S 2A102JR
RS25	J0196118R	RMC73M-1F104JR 100K
RS30	J0195900R	RMC73S 2A102JR
RS32	J0196068R	RMC73M-1F102JR
RS33	J0196118R	RMC73M-1F104JR 100K
RS35	J0196084R	RMC73M-1F472JR
RS38	J0196068R	RMC73M-1F102JR
RS40	J0700049M	4K7 1/16W C/FILM 5%
RS41	J0195900R	RMC73S 2A102JR
RS46	J0196118R	RMC73M-1F104JR 100K
RS47	J0196068R	RMC73M-1F102JR
RS49	J0700041M	1K 1/16W C/FILM 5%
RS50	J0196068R	RMC73M-1F102JR
RS51	J0196118R	RMC73M-1F104JR 100K
RS53	J0196068R	RMC73M-1F102JR
RS54	J0196068R	RMC73M-1F102JR
RS55	J0700049M	4K7 1/16W C/FILM 5%
RS60	J0196118R	RMC73M-1F104JR 100K
RS61	J0196084R	RMC73M-1F472JR
RS62	J0700041M	1K 1/16W C/FILM 5%
RS64	J0195900R	RMC73S 2A102JR
RS65	J0195900R	RMC73S 2A102JR
RS91	J0195871R	RMC73S 2A750JR
S001	E139506	5 WAY TACT SWITCH
SCART1	E826946	A20 DOUBLE SCART
SCART2	E826945	SINGLE SCART METALLO
SHROUD	X321241	&ACTUATOR SHROUD
SW900	J2634732	SWITCH SDD-FC BEAB
T700	JBW02021	FBT HFL1735LD 32" BEAB
T700A	G201316	M3 X 16 SCREW
T700B	N332067	SPACER
T702	J2260291U	H DRIVE TRANSFORMER TAW
T900	L380183	SMT4 +/- 17V BEAB
T902	L380181	SW MODE XXXX CT286D8 BEAB
VR904	E311108	500R POT HORIZONTAL TAPE
VR964	J0160211R	EVND8AA03B13-TAPE(PANA)
W002	EC5A100A	7/0.2MM S000030
W003	EC5A060A	7/0.2MM S000030
W005	EC530603	7/0.2MM S000010
W008	EC5A120A	7/0.2 S000030
W009	EC5A060A	7/0.2MM S000030
W010	EC530903	7/0.2MM S000029
W017	EC530503	7/0.2MM S000029
W018	EC530203	7/0.2MM S000010

A529448 PARTS LIST

I.D.	Part No.	Description
W019	EC530603	7/0.2MM S000010
W020	EC530303	7/0.2MM S000010
W021	EC5A120A	7/0.2 S000030
W022	EC530903	7/0.2MM S000029
W023	EC530203	7/0.2MM S000010
W024	EC5A110A	7/0.2MM S000030
W025	EC531603	7/0.2 S000029
W026	EC531603	7/0.2 S000029
X001	E516081F	CRYSTAL 6MHZ
X200	E518054	K9453M
X219	E518053	K3953M
X305	L420187	BLM11A102S
X513	E516030F	12MHz X'TAL NDK 5MM LEG
Z005	T536219	BZX79B3V3~PHILIPS~
Z006	T536312	PDZ-B 3.6B 2% SMT ZENER
Z007	T536279	BZX284-C5V6 5% S MOUNT
Z008	T536279	BZX284-C5V6 5% S MOUNT
Z014	T536312	PDZ-B 3.6B 2% SMT ZENER
Z205	T536215	BZX 79C 33V~PHILIPS~
Z404	T536181	BZX79C 13V~PHILIPS~
Z501	T536184	BZX79C 9V1~PHILIPS~
Z502	T536184	BZX79C 9V1~PHILIPS~
Z503	T536184	BZX79C 9V1~PHILIPS~
Z504	T536184	BZX79C 9V1~PHILIPS~
Z505	T536284	BZX284-C9V1
Z506	T536284	BZX284-C9V1
Z507	T536277	BZX284-C 4V7 5%
Z600	T536178	BZX79C 3V3~PHILIPS~
Z601	T536178	BZX79C 3V3~PHILIPS~
Z603A	T536173	BZX79C18V~PHILIPS~
Z603B	T536215	BZX 79C 33V~PHILIPS~
Z604	T536259	BZX79C56V
Z607	T536284	BZX284-C9V1
Z608	T536284	BZX284-C9V1
Z610	T536173	BZX79C18V~PHILIPS~
Z615	T536172	BZX79C27V~PHILIPS~
Z616	T536280	BZX284-C6V2
Z703	T536235	BZX79B18V~PHILIPS~
Z713	J2339251M	HZS36-ILT
Z741	T536259	BZX79C56V
Z744	T536227	BZX79B7V5~PHILIPS~
Z900	T536266	BZV85-C27V
Z927	T536173	BZX79C18V~PHILIPS~
Z942	T536179	BZX79C 6V2~PHILIPS~
Z964	T536236	BZX79B22V~PHILIPS~
Z990	T536173	BZX79C18V~PHILIPS~
Z991	T536173	BZX79C18V~PHILIPS~
Z992	T536173	BZX79C18V~PHILIPS~
ZA01	T536279	BZX284-C5V6 5% S MOUNT
ZA08	T536268	BZV85-C22V
ZA10	T536172	BZX79C27V~PHILIPS~
ZR048A	W470200	1MM 1/D SLEEVING BLACK
ZR048B	W470200	1MM 1/D SLEEVING BLACK
ZS14	T536271	BZX284-C2V7
ZS25	T536271	BZX284-C2V7
ZS31	T536271	BZX284-C2V7
ZS42	T536271	BZX284-C2V7
ZS51	T536271	BZX284-C2V7
ZS60	T536271	BZX284-C2V7
ZZA08	W470200	1MM 1/D SLEEVING BLACK

A529449 PARTS LIST

I.D.	Part No.	Description
#15	E573018	FERRITE CLAMP CORE
#200	J3731082	PURSE LOCK
#27	L350016	FERRITE CORE
#270	J2123462M	FERRITE BEADS TYPE B2.3UH
#40	E573018	FERRITE CLAMP CORE
#4069	J3731082	PURSE LOCK
#500	E573018	FERRITE CLAMP CORE
#5000	N937052	CHASSIS FRAME
#5071	G291311	3X12 BT SCREW (BLACK)
#5072	G291311	3X12 BT SCREW (BLACK)
#5073	G291311	3X12 BT SCREW (BLACK)
#5075	N332067	SPACER
#5075	N332067	SPACER
#67	J3731082	PURSE LOCK
#68	J3731082	PURSE LOCK
#802	G864006	CABLE TIE T18R
#E802	JBM00041	FERRITE CORES BP53RB
AV300	JEU00581	PHONO-S/VHS CONNECTOR
B001	PC55002	A20 MAIN PCB BEAB
C001	J0893179R	CKM-104K160B-CNT1608
C002	J0893027R	CKM-104K250B-CNT2125
C003	J0800271R	ELECT CAP 0.1UF 50V SMG
C004	J0800282R	CAP ELECTRO 2.2UF-M 50V
C005	J0800291R	CAP ELEC 10uF 16V SMG
C007	J0800282R	CAP ELECTRO 2.2UF-M 50V
C008	J0800291R	CAP ELEC 10uF 16V SMG
C009	J0800291R	CAP ELEC 10uF 16V SMG
C010	J0893179R	CKM-104K160B-CNT1608
C011	J0893179R	CKM-104K160B-CNT1608
C012	J0893027R	CKM-104K250B-CNT2125
C013	J0227219R	CK73B1H104KR 100N 1206
C014	J0800317R	CP ELECTRO 47UF SMG 16
C015	J0893179R	CKM-104K160B-CNT1608
C016	J0228042R	CC73SCH1H330JR
C017	J0228042R	CC73SCH1H330JR
C019	J0893222R	CKM-103K500B-CNT1608
C020	J0800271R	ELECT CAP 0.1UF 50V SMG
C202	J0800364F	CAP ELECT 1000UF 50V SMG
C203	J0800361F	CAP ELEC 1000UF-M SMG 16V
C204	J0227219R	CK73B1H104KR 100N 1206
C205	J0800317R	CP ELECTRO 47UF SMG 16
C206	J0893044R	CKM 103K500B CNT2125
C208	J0800291R	CAP ELEC 10uF 16V SMG
C209	J0893044R	CKM 103K500B CNT2125
C210	J0893222R	CKM-103K500B-CNT1608
C211	J0893123R	CC73MCH1H560JR
C212	J0893113R	CC73MCH1H100C
C213	J0893044R	CKM 103K500B CNT2125
C215	J0893222R	CKM-103K500B-CNT1608
C220	J0893044R	CKM 103K500B CNT2125
C301	J0800352R	ELEC CAP 470UF 10V SMG
C302	J0227009R	CK73B1H102KR 1N 1206
C303	J0893027R	CKM-104K250B-CNT2125
C304	J0893027R	CKM-104K250B-CNT2125
C305	J0880194R	0.1UF 50V +-5% (100N)
C309	J0800352R	ELEC CAP 470UF 10V SMG
C310	J0893031R	CKM 102K500B CNT2125
C312	J0893179R	CKM-104K160B-CNT1608
C313	J0893027R	CKM-104K250B-CNT2125
C318	J0893027R	CKM-104K250B-CNT2125
C324	J0893179R	CKM-104K160B-CNT1608
C325	J0893179R	CKM-104K160B-CNT1608
C326	J0893179R	CKM-104K160B-CNT1608
C327	J0880194R	0.1UF 50V +-5% (100N)
C328	J0893027R	CKM-104K250B-CNT2125
C329	J0893027R	CKM-104K250B-CNT2125
C331	J0800326R	CEL-101M160WMFT
C332	J0800317R	CP ELECTRO 47UF SMG 16
C345	J0227219R	CK73B1H104KR 100N 1206
C369	J0800326R	CEL-101M160WMFT
C370	J0893027R	CKM-104K250B-CNT2125
C371	J0800326R	CEL-101M160WMFT
C372	J0893027R	CKM-104K250B-CNT2125
C373	J0800326R	CEL-101M160WMFT
C374	J0227219R	CK73B1H104KR 100N 1206
C401	J0893208R	CKM-102K500B-CNT1608
C403	J0893126R	CCM-101J500CHCNT1608
C404	J0800294R	ELECT CAP 10UF 50V SMG
C405	J0893031R	CKM 102K500B CNT2125
C406	J0228054R	CC73SCH1H101JR
C407	J0800294R	ELECT CAP 10UF 50V SMG
C408	J0893031R	CKM 102K500B CNT2125
C410	J0227009R	CK73B1H102KR 1N 1206
C411	J0228054R	CC73SCH1H101JR
C412	J0893031R	CKM 102K500B CNT2125
C413	J0228054R	CC73SCH1H101JR
C414	J0800294R	ELECT CAP 10UF 50V SMG
C415	J0893031R	CKM 102K500B CNT2125
C416	J0800294R	ELECT CAP 10UF 50V SMG
C417	J0893208R	CKM-102K500B-CNT1608
C420	J0800291R	CAP ELEC 10uF 16V SMG
C422	J0893031R	CKM 102K500B CNT2125
C423	J0893027R	CKM-104K250B-CNT2125
C424	J0800291R	CAP ELEC 10uF 16V SMG
C425	J0893027R	CKM-104K250B-CNT2125
C429	J0893208R	CKM-102K500B-CNT1608
C430	J0893208R	CKM-102K500B-CNT1608
C431	J0227449R	CK73B1E334ZR 330N 25V
C432	J0227449R	CK73B1E334ZR 330N 25V
C433	J0227449R	CK73B1E334ZR 330N 25V
C434	J0227449R	CK73B1E334ZR 330N 25V
C435	J0800291R	CAP ELEC 10uF 16V SMG
C436	J0800294R	ELECT CAP 10UF 50V SMG
C437	J0800291R	CAP ELEC 10uF 16V SMG
C438	J0893179R	CKM-104K160B-CNT1608
C439	C353883	GRM40Y5V334Z16PT
C440	J0893027R	CKM-104K250B-CNT2125
C441	J0227449R	CK73B1E334ZR 330N 25V
C442	J0227449R	CK73B1E334ZR 330N 25V
C443	J0893248R	CKM-334Z160B-CNT1608

A529449 PARTS LIST

I.D.	Part No.	Description
C444	C353883	GRM40Y5V334Z16PT
C445	C353883	GRM40Y5V334Z16PT
C446	C353883	GRM40Y5V334Z16PT
C447	C353883	GRM40Y5V334Z16PT
C448	C353883	GRM40Y5V334Z16PT
C449	J0893027R	CKM-104K250B-CNT2125
C450	J0800291R	CAP ELEC 10uF 16V SMG
C451	J0800294R	ELECT CAP 10UF 50V SMG
C452	J0893197R	CKM-223K250B-CNT1608
C454	J0893027R	CKM-104K250B-CNT2125
C455	J0893123R	CC73MCH1H560JR
C456	J0893123R	CC73MCH1H560JR
C457	J0893123R	CC73MCH1H560JR
C458	J0893126R	CCM-101J500CHCNT1608
C459	C608886	& GRM40COG6R8D50PT 6.8PF
C460	C608886	& GRM40COG6R8D50PT 6.8PF
C461	J0893123R	CC73MCH1H560JR
C462	J0893213R	CC73MCH1H222JR
C463	J0893179R	CKM-104K160B-CNT1608
C465	J0800294R	ELECT CAP 10UF 50V SMG
C466	J0800353R	CAP ELECTRO 470UF 16V
C467	J0800294R	ELECT CAP 10UF 50V SMG
C468	J0893031R	CKM 102K500B CNT2125
C470	J0893179R	CKM-104K160B-CNT1608
C471	J0800327R	ELECT CAP 100UF 25V SMG
C500	J0893039R	CKM 472K500B CNT 2125
C501	J0800279R	ELECT CAP 1.UF 50V
C502	J0195250R	RMC73S 000R
C503	J0893044R	CKM 103K500B CNT2125
C504	J0800279R	ELECT CAP 1.UF 50V
C506	J0890087R	CAP CERAMIC 1000pf-B 50V
C508	J0893222R	CKM-103K500B-CNT1608
C509	J0893222R	CKM-103K500B-CNT1608
C510	J0227436R	0.22U +/-10% 1206 SMT
C511	J0893206R	680PF +/-10% 0603 SMT
C518U	C150711	CAP 100N 36521104 100V POL
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
C572	J0228066R	GRM40CDG331J50PT
C575	J0893027R	CKM-104K250B-CNT2125
C576	J0893048R	CKM-223K500B-CNT2125
C577	J0893027R	CKM-104K250B-CNT2125
C578	J0893027R	CKM-104K250B-CNT2125
C579	J0893027R	CKM-104K250B-CNT2125
C581	J0880016R	POLY CAP FLM 0.1UF 50V
C582	J0893027R	CKM-104K250B-CNT2125
C583	J0195250R	RMC73S 000R
C585	J0800372F	CEL 332 M160WNL SMG 5MM
C586	J0893027R	CKM-104K250B-CNT2125
C588	J0893027R	CKM-104K250B-CNT2125
C589	J0893039R	CKM 472K500B CNT 2125
C590	J0195250R	RMC73S 000R
C591	J0195250R	RMC73S 000R
C592	J0195250R	RMC73S 000R
C593	J0800279R	ELECT CAP 1.UF 50V
C594	J0228038R	CC73SCH1H220JR
C595	J0228038R	CC73SCH1H220JR
C596	J0893027R	CKM-104K250B-CNT2125
C597	J0800372F	CEL 332 M160WNL SMG 5MM
C598	C457884	&GRM40X7R474K25PT 470N
C599	J0893035R	CKM--222K500B CNT2125
C602	J0800337R	CEL-221M350WMFT
C603	J0800329R	ELECT CAP 100UF 50V SMG
C604	J0880044R	CAP POLYESTER 0.01UF K50V
C605	C150711	CAP 100N 36521104 100V POL
C606	J0893027R	CKM-104K250B-CNT2125
C607	J0893027R	CKM-104K250B-CNT2125
C610	J0890092R	CAP CERAMIC 0.0022uF 50V
C616	J0800339F	CAP ELECT 220UF 63V
C617	J0227009R	CK73B1H102KR 1N 1206
C620	J0893027R	CKM-104K250B-CNT2125
C621	J0893208R	CKM-102K500B-CNT1608
C639	J0800292R	CAP ELECT 10UF 25V SMG
C644	J0890092R	CAP CERAMIC 0.0022uF 50V
C701	J0243507R	CK45B2H331KB
C702	J0257540F	ELEC CAP 4U7 250V
C703	C140760	10n 2KV R/EVOX PHE428
C704	JAJ00138F	CC-222K202R-DF 2N2 2KV
C705	J0299993F	CAP 18NF 5% 630V POLY
C706	J0890087R	CAP CERAMIC 1000pf-B 50V
C707	JAJ00134R	CK45-R3DD102K 1N 2KV
C708	J0244505R	CER CAP 2n2-K 500V
C709	J0253953R	CE04W2C2R2M
C710	J0253953R	CE04W2C2R2M
C711	C353764	&330N MKP379 44334
C712	C353764	&330N MKP379 44334
C713	C353764	&330N MKP379 44334
C714	C158764	180N MKP379 44184
C715	J0243512R	CK45B2H821KB
C716	C140707	CAP 10N 365-51103 MULARD
C719	J0257540F	ELEC CAP 4U7 250V
C720	J0880033R	CQM-152K500HFT
C724	JAJ00121R	CK45-R3DD101K 100PF 2KV
C726	J0800336R	CAP ELEC 220UF M SMG 25V
C727	J0243507R	CK45B2H331KB
C732	J0800291R	CAP ELEC 10uF 16V SMG
C735U	J0880044R	CAP POLYESTER 0.01UF K50V
C737	C160708	1UF +-10% 250V 368-45105
C740	J0244509R	CER CAP 4700PF-K 500V
C741	J0244509R	CER CAP 4700PF-K 500V
C742	J0800337R	CEL-221M350WMFT
C743	J0880053R	CQ93M1H473KEB(MF) N/PAN
C747	J0250511R	CAP POLY 0.022UF PHILIPS
C748	JAJ00134R	CK45-R3DD102K 1N 2KV
C749	J0880194R	0.1UF 50V +-5% (100N)
C764	J0800279R	ELECT CAP 1.UF 50V
C769	JAJ00134R	CK45-R3DD102K 1N 2KV
C770	J0800292R	CAP ELECT 10UF 25V SMG
C900	C150763	&100NF 20% X2 275V BEABT
C901	J0262774N	0.22UF 250VAC X2 ~BEABT
C902	J0262774N	0.22UF 250VAC X2 ~BEABT

A529449 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
C903	J0890083R	CK45 B1H471KB	C999	C232753	2N2 4KVAC PME294 UL BEABT
C904	C648763	&68NF 20% X2 275V BEABT	CA01U	J0880198R	POLY CAP 0.22UF-J 50V
C905	C001561	ELECT CAP 100UF 250V	CA02U	J0880198R	POLY CAP 0.22UF-J 50V
C908	J0800329R	ELECT CAP 100UF 50V SMG	CA03	J0880198R	POLY CAP 0.22UF-J 50V
C909	J0800352R	ELEC CAP 470UF 10V SMG	CA04	J0893031R	CKM 102K500B CNT2125
C910	J0880044R	CAP POLYESTER 0.01UF K50V	CA05	J0893031R	CKM 102K500B CNT2125
C911	J0800328R	CEL-101M350WMFT	CA06	J0893118R	CCM-270J500CHCNT1608
C912	J0244505R	CER CAP 2n2-K 500V	CA07	C001550	4700UF 25V SMG S/LEG
C913	J0800327R	ELECT CAP 100UF 25V SMG	CA08	J0893135R	CC73MCH1H471JR 1608
C914	C005046	ELECT 1000UF 25V LXY	CA09	J0893179R	CKM-104K160B-CNT1608
C915	J0800354R	470UF 25V SMG	CA10	J0893133R	CC73MCH1H331JR
C916	C005046	ELECT 1000UF 25V LXY	CA11	J0893135R	CC73MCH1H471JR 1608
C917	J0880048R	CQT223K50MB (PANASONIC)	CA12	J0893135R	CC73MCH1H471JR 1608
C918	C001561	ELECT CAP 100UF 250V	CA13	J0284623R	CEL-1R0M500WMFT(BP)E
C919	J0890078R	CK45B1H221KB (MURATA)	CA14	C001550	4700UF 25V SMG S/LEG
C920	C001561	ELECT CAP 100UF 250V	CA15	C343882	GRM40X7R333K50-550
C921	C001561	ELECT CAP 100UF 250V	CA16	J0880198R	POLY CAP 0.22UF-J 50V
C922	J0880037R	CQM332K500HFT	CA17	J0893208R	CKM-102K500B-CNT1608
C923	J0880037R	CQM332K500HFT	CA18	J0893208R	CKM-102K500B-CNT1608
C924	J0800294R	ELECT CAP 10UF 50V SMG	CA20	J0893027R	CKM-104K250B-CNT2125
C925	JAJ00121R	CK45-R3DD101K 100PF 2KV	CA21	J0228070R	MINI CHIP 470PF-J CH 50V
C926	JAJ00127R	CK45-R3DD 331K	CA22	J0893133R	CC73MCH1H331JR
C927	JAJ00121R	CK45-R3DD101K 100PF 2KV	CA24	J0893027R	CKM-104K250B-CNT2125
C929	J0800327R	ELECT CAP 100UF 25V SMG	CA25	J0880064R	CQM - 334J500HFT
C931	JAJ00138F	CC-222K202R-DF 2N2 2KV	CA27	J0893031R	CKM 102K500B CNT2125
C932	J0880037R	CQM332K500HFT	CA28	J0284623R	CEL-1R0M500WMFT(BP)E
C933	J0253491F	ELEC CAP 100UF 200V	CA29	C343882	GRM40X7R333K50-550
C936	J0880051R	CQ93M1H333KEB PANASONIC	CA30	J0893208R	CKM-102K500B-CNT1608
C942	J0880042R	CQ93M1H682KEB(MF) N/PAN	CA31	J0800291R	CAP ELEC 10uF 16V SMG
C950	J0259431F	ELEC CAP 220UF 200V	CA32	J0893179R	CKM-104K160B-CNT1608
C951	J0800362F	CAP ELECT 1000UF 25V SMG	CA33	J0893179R	CKM-104K160B-CNT1608
C952	J0800362F	CAP ELECT 1000UF 25V SMG	CA34	J0893222R	CKM-103K500B-CNT1608
C953	J0243509R	CERAMIC CAP 470p 500V	CA35	J0800316R	47u 10V ELECT CAP SMG
C954	J0243509R	CERAMIC CAP 470p 500V	CA36	J0800316R	47u 10V ELECT CAP SMG
C955	JAJ00129R	CK45-R3DD 471K	CA37	J0800325R	CEL-101M100WMFT
C957	J0243509R	CERAMIC CAP 470p 500V	CA38	J0800325R	CEL-101M100WMFT
C959	J0800353R	CAP ELECTRO 470UF 16V	CA39	J0893219R	CCM-682K500B-CNT1608
C960	J0244501R	CER CAP 1000PF-K 500V	CA40	J0893042R	CKM 682K500B CNT2125
C961	J0244501R	CER CAP 1000PF-K 500V	CA41	J0800325R	CEL-101M100WMFT
C962	J0244501R	CER CAP 1000PF-K 500V	CA42	J0284623R	CEL-1R0M500WMFT(BP)E
C963	J0244501R	CER CAP 1000PF-K 500V	CA44	J0284623R	CEL-1R0M500WMFT(BP)E
C964	J0243511R	CER CAP 680PF-K 500V	CS20	J0800326R	CEL-101M160WMFT
C967	J0243509R	CERAMIC CAP 470p 500V	CS40B	JAA00381R	10UF 6.3V SMT 3216
C970	J0800345R	ELECT CAP 330UF 25V SMG	CS44	J0893126R	CCM-101J500CHCNT1608
C971	J0880044R	CAP POLYESTER 0.01UF K50V	CS45	J0893126R	CCM-101J500CHCNT1608
C977	J0243509R	CERAMIC CAP 470p 500V	CS60B	JAA00381R	10UF 6.3V SMT 3216
C986	J0800328R	CEL-101M350WMFT	CS62	J0893126R	CCM-101J500CHCNT1608
C987	J0800352R	ELEC CAP 470UF 10V SMG	CS63	J0893126R	CCM-101J500CHCNT1608
C990	J0880048R	CQT223K50MB (PANASONIC)	CU01	J0800359R	CEL-102M100WMFT
C991	E884110	SPARK GAP 10N 2KV SDUK 16	D001	T531069	SHOTTKY 30V/200mA/BAT254
C992	J0880044R	CAP POLYESTER 0.01UF K50V	D002	T531067	DIODE BAS216 S/MOUNT
C993	C150891	100N 500V CAP	D003	T531067	DIODE BAS216 S/MOUNT
C994	J0800327R	ELECT CAP 100UF 25V SMG	D004	T531069	SHOTTKY 30V/200mA/BAT254
C995	J0880037R	CQM332K500HFT	D006	T531069	SHOTTKY 30V/200mA/BAT254
C997	J0880031R	CQ93M1H102KEB (MF) N/PAN	D007	T531069	SHOTTKY 30V/200mA/BAT254

A529449 PARTS LIST

I.D.	Part No.	Description
D008	T531069	SHOTTKY 30V/200mA/BAT254
D009	T531069	SHOTTKY 30V/200mA/BAT254
D011	J2343963M	MPG06J (TAPE) GI
D015	T531067	DIODE BAS216 S/MOUNT
D016	T531069	SHOTTKY 30V/200mA/BAT254
D017	T531069	SHOTTKY 30V/200mA/BAT254
D018	T531069	SHOTTKY 30V/200mA/BAT254
D206	T531067	DIODE BAS216 S/MOUNT
D208	T531067	DIODE BAS216 S/MOUNT
D209	T531067	DIODE BAS216 S/MOUNT
D301	T531068	DIODE MA723/TP PANASONIC
D501	T531067	DIODE BAS216 S/MOUNT
D502	T531056	DIODE BYV10-40 ~MULLARD
D503	T531056	DIODE BYV10-40 ~MULLARD
D507	T531067	DIODE BAS216 S/MOUNT
D508	J2348921M	DIODE 1N4531
D522	T531068	DIODE MA723/TP PANASONIC
D523	T531069	SHOTTKY 30V/200mA/BAT254
D601	J2348921M	DIODE 1N4531
D603	T531067	DIODE BAS216 S/MOUNT
D604	T431113	DIODE BYD33J MULL BEAB
D607	T531053	DIODE IN4148 MULL/PHIL/ITT
D608	T531053	DIODE IN4148 MULL/PHIL/ITT
D610	T431113	DIODE BYD33J MULL BEAB
D611	T431113	DIODE BYD33J MULL BEAB
D622	J2343962M	MPG06G
D645	T536259	BZX79C56V
D701	T431113	DIODE BYD33J MULL BEAB
D702	T431113	DIODE BYD33J MULL BEAB
D703	J2343941M	RGP10G
D706	T431117F	DIODE BY228 P/F PHILIPS
D707	T531086F	BYW96E
D708	J2336612	RU3AM
D711	T531086F	BYW96E
D713	T431113	DIODE BYD33J MULL BEAB
D714	T431113	DIODE BYD33J MULL BEAB
D715	J2348921M	DIODE 1N4531
D716	J2348921M	DIODE 1N4531
D735	T431113	DIODE BYD33J MULL BEAB
D739	J2348921M	DIODE 1N4531
D745	J2348921M	DIODE 1N4531
D904	J2348921M	DIODE 1N4531
D905	T431113	DIODE BYD33J MULL BEAB
D906	T431113	DIODE BYD33J MULL BEAB
D907	T531055	DIODE BAT85 SCHOTTKY MULL
D910	J2348921M	DIODE 1N4531
D911	J2348921M	DIODE 1N4531
D913	J2348921M	DIODE 1N4531
D914	J2348921M	DIODE 1N4531
D915	T431113	DIODE BYD33J MULL BEAB
D916	T431113	DIODE BYD33J MULL BEAB
D919	T531086F	BYW96E
D920	J2342711M	DIODE EM2A (SANKEN)
D921	J2342711M	DIODE EM2A (SANKEN)
D922	J2342711M	DIODE EM2A (SANKEN)
D923	J2342711M	DIODE EM2A (SANKEN)
D924	J2342711M	DIODE EM2A (SANKEN)
D925	T431122	DIODE BYV28-200~PHILIPS~
D927	J2348921M	DIODE 1N4531
D931	J2342711M	DIODE EM2A (SANKEN)
D933	T536259	BZX79C56V
D934	T431114	& BYD33M
D939	T431113	DIODE BYD33J MULL BEAB
D953	T431145	BYW29E-200
D953A	H224075	H/SINK F9-4-220 &TAG COL
D955	T431127	BYR29F-700
D955A	H235369	FI2-32-2LA-2 HEATSINK
D955B	G291023	M2.5x8 TAPTITE SCREW
D955C	G560333	M2.5 SPRING WASHER
D960	J2342711M	DIODE EM2A (SANKEN)
D961	J2342711M	DIODE EM2A (SANKEN)
D962	J2342711M	DIODE EM2A (SANKEN)
D963	J2342711M	DIODE EM2A (SANKEN)
D970	T431113	DIODE BYD33J MULL BEAB
D977	T431122	DIODE BYV28-200~PHILIPS~
D982	J2348921M	DIODE 1N4531
D984	T531053	DIODE IN4148 MULL/PHIL/ITT
D991	T431113	DIODE BYD33J MULL BEAB
D992	T431120	DIODE BYV27-150 ~MULLARD~
D994	T531055	DIODE BAT85 SCHOTTKY MULL
D995	T531053	DIODE IN4148 MULL/PHIL/ITT
D996	J2348921M	DIODE 1N4531
D997U	J2348921M	DIODE 1N4531
DA01	T531067	DIODE BAS216 S/MOUNT
DA02	J2348921M	DIODE 1N4531
DA03	T531067	DIODE BAS216 S/MOUNT
DS42	T531067	DIODE BAS216 S/MOUNT
DS60	T531067	DIODE BAS216 S/MOUNT
E002	E843366	OSD SHIELDED LEAD
E04	E843369	SPEAKER LEAD
E10	E846825	A5 SCREEN LD 2PIN EHUK
E1015	E843304	4 WAY LD 430mm(PS06/E413)
E206	E843314	CPT EARTH LEAD
E207	E843314	CPT EARTH LEAD
E208	E843286	GROUND LEAD FEMALE
E30	E846825	A5 SCREEN LD 2PIN EHUK
E500	E843376	OSD SHIELDED LEAD
E601	J2661752	3P PLUG PIN/BASE UL BEAB
E802	E843351	A20 8 WAY CRT BASE LEAD
E803	E846902	A7 CRT BASE LEAD 550mm
F900	J2722446	FUS-4A T4AH 250V BEABT
F900A	J2721792	FUSE HOLDER UL/BEAB
F901	E882359	FUSE GLASS T2.0AL BEABT
F901A	J2721792	FUSE HOLDER UL/BEAB
HS01	E826160	H/P SKT HSJ3000-01-010
I001	T900956	LE33CZ TO92
I003	E730303	IC M8_IP
I003A	E823935	52WAY IC SKT ~ FELCO
I004	T900779	74HC595
I006	T900989	M24C16-W SMT

A529449 PARTS LIST

I.D.	Part No.	Description
I007	T900980	M62703ML
I302	T900762	IC 4053 SO16N
I303	T900762	IC 4053 SO16N
I304	T900762	IC 4053 SO16N
I401	T901008	MSP3411G
I403	T901002	BA10358
I501	T900959	TDA8879
I601	T900951	TDA8358J
I601A	H235475	HEATSINK A20
I601B	G884020	SPRING CLIP 56379-MULLARD
I900	T900452	UC3844 SGS/UNITRODE
I902	T900815	& UC3843N SGS
I903	T901000	L78M05CV 500MA REGULATOR
I903A	H224085	F9-4-220D-2LS
I904	T900345	REG 7805 SGS/MOTO/NEC
I904A	G884023	SPRING CLIP
I905	T900963	IC VIPER 20
I905A	H224085	F9-4-220D-2LS
I943	T900796	&TL431CZ-AP SGS
I964	T548013	CNY17F1/6 SIEMENS BEABT
I997	T548016	PC817B OPTO BEAB
I998	T548016	PC817B OPTO BEAB
I999	T548013	CNY17F1/6 SIEMENS BEABT
IA01	T900955	TDA7490L
IA04	T900978	TDA2822D SO8
IR01	T549018	& IR REC TSOP2838UH1 TEMIC
K118	J0796491R	RMC73M-000R
K120	J0195248R	RMC73--000R
K121	J0195248R	RMC73--000R
K126	J0796491R	RMC73M-000R
K129	J0195250R	RMC73S 000R
K132	J0195248R	RMC73--000R
K133	J0796491R	RMC73M-000R
K135	J0195248R	RMC73--000R
K136	J0195248R	RMC73--000R
K137	J0796491R	RMC73M-000R
K139	J0195248R	RMC73--000R
K141	J0195250R	RMC73S 000R
K142	J0195250R	RMC73S 000R
K146	J0195248R	RMC73--000R
K152	J0195250R	RMC73S 000R
K157	J0195248R	RMC73--000R
K16	J0195250R	RMC73S 000R
K161	J0195248R	RMC73--000R
K165	J0195248R	RMC73--000R
K166	J0796491R	RMC73M-000R
K167	J0195250R	RMC73S 000R
K168	J0195250R	RMC73S 000R
K170	J0796491R	RMC73M-000R
K171	J0195248R	RMC73--000R
K175	J0195250R	RMC73S 000R
K176	J0195250R	RMC73S 000R
K182	J0796491R	RMC73M-000R
K183	J0796491R	RMC73M-000R
K189	J0796491R	RMC73M-000R
K192	J0796491R	RMC73M-000R
K197	J0195248R	RMC73--000R
K198	J0195248R	RMC73--000R
K199	J0195250R	RMC73S 000R
K20	J0195250R	RMC73S 000R
K200	J0195248R	RMC73--000R
K202	J0195250R	RMC73S 000R
K203	J0195248R	RMC73--000R
K206	J0796491R	RMC73M-000R
K216	J0796491R	RMC73M-000R
K220	J0796491R	RMC73M-000R
K225	J0195248R	RMC73--000R
K231	J0195248R	RMC73--000R
K233	J0195250R	RMC73S 000R
K236	J0195250R	RMC73S 000R
K237	J0195250R	RMC73S 000R
K240	J0195250R	RMC73S 000R
K241	J0195250R	RMC73S 000R
K242	J0195250R	RMC73S 000R
K243	J0195250R	RMC73S 000R
K25	J0195248R	RMC73--000R
K262	J0195250R	RMC73S 000R
K266	J0195250R	RMC73S 000R
K267	J0796491R	RMC73M-000R
K271	J0796491R	RMC73M-000R
K288	J0195248R	RMC73--000R
K289	J0796491R	RMC73M-000R
K293	J0195248R	RMC73--000R
K299	J0796491R	RMC73M-000R
K300	J0195250R	RMC73S 000R
K303	J0195250R	RMC73S 000R
K310	J0195250R	RMC73S 000R
K333	J0796491R	RMC73M-000R
K341	J0195248R	RMC73--000R
K343	J0195248R	RMC73--000R
K345	J0796491R	RMC73M-000R
K346	J0796491R	RMC73M-000R
K350	J0195248R	RMC73--000R
K39	J0195250R	RMC73S 000R
K504	J0195250R	RMC73S 000R
K510	J0796491R	RMC73M-000R
K512	J0195248R	RMC73--000R
K513	J0796491R	RMC73M-000R
K64	J0195250R	RMC73S 000R
K66	J0195248R	RMC73--000R
K67	J0195248R	RMC73--000R
K68	J0796491R	RMC73M-000R
K84	J0195248R	RMC73--000R
K85	J0195250R	RMC73S 000R
K86	J0195250R	RMC73S 000R
K87	A306099	BRACKET ASSEMBLY
K88	J0195248R	RMC73--000R
KVR900	W024001	0.56ML SFT TIN'D COP WIRE
L001	J2122943M	AXIAL COIL 10UH-J
L002	J2122943M	AXIAL COIL 10UH-J

A529449 PARTS LIST

I.D.	Part No.	Description
L003	J2122943M	AXIAL COIL 10UH-J
L200	J0195250R	RMC73S 000R
L201	J0195250R	RMC73S 000R
L202	J0195250R	RMC73S 000R
L203	J0195250R	RMC73S 000R
L204	J0195250R	RMC73S 000R
L205	J0195250R	RMC73S 000R
L208	J0195250R	RMC73S 000R
L210	J0195250R	RMC73S 000R
L256	J2123781R	FILTER COIL EL101K
L309	L420187	BLM11A102S
L310	L420187	BLM11A102S
L311	J0796491R	RMC73M-000R
L312	J0195250R	RMC73S 000R
L313	J0796491R	RMC73M-000R
L314	J0796491R	RMC73M-000R
L315	J0796491R	RMC73M-000R
L317	J0796491R	RMC73M-000R
L318	J0796491R	RMC73M-000R
L330	J2122956M	COIL LAL 100UH K
L331	J0796491R	RMC73M-000R
L333	L420187	BLM11A102S
L334	L420187	BLM11A102S
L335	J0195250R	RMC73S 000R
L336	J0796491R	RMC73M-000R
L337	J0796491R	RMC73M-000R
L338	J0796491R	RMC73M-000R
L340	J0796491R	RMC73M-000R
L341	J0796491R	RMC73M-000R
L348	J0796491R	RMC73M-000R
L349	J2123781R	FILTER COIL EL101K
L350	J2123781R	FILTER COIL EL101K
L351	J2123781R	FILTER COIL EL101K
L358	J0796491R	RMC73M-000R
L400	J2123781R	FILTER COIL EL101K
L419	L420187	BLM11A102S
L420	J2122943M	AXIAL COIL 10UH-J
L422	L420187	BLM11A102S
L423	J2122943M	AXIAL COIL 10UH-J
L443	L420187	BLM11A102S
L444	J2122943M	AXIAL COIL 10UH-J
L446	L420187	BLM11A102S
L447	J2122943M	AXIAL COIL 10UH-J
L451	J2122253M	AXIAL COIL 100uH K TAPE
L452	J2122253M	AXIAL COIL 100uH K TAPE
L453	J2122253M	AXIAL COIL 100uH K TAPE
L540	J2123781R	FILTER COIL EL101K
L553	J2123781R	FILTER COIL EL101K
L601	J2123462M	FERRITE BEADS TYPE B2.3UH
L602	L300002	RL8010-100J-UL-HUK-B06
L604	L300002	RL8010-100J-UL-HUK-B06
L700	JBH00039	HC-820KS1 (LHL10)
L701	J2123461M	FERRITE BEAD 0.8uH
L702	L380178	LIN COIL ISKRA
L704	J2123461M	FERRITE BEAD 0.8uH
L705	J2123462M	FERRITE BEADS TYPE B2.3UH
L751	L380117	BRIDGE COIL 5MH
L752	L380147	&BRIDGE COIL
L900	L210068	M/FILTER 97192 RIFA BEAB
L901	L210068	M/FILTER 97192 RIFA BEAB
L902	J2123462M	FERRITE BEADS TYPE B2.3UH
L903	J2123462M	FERRITE BEADS TYPE B2.3UH
L904	J2125579	CHOKE COIL 47UH
L905	J2123462M	FERRITE BEADS TYPE B2.3UH
L909	J2123462M	FERRITE BEADS TYPE B2.3UH
L911	L300005	RL8010-180J-UL-HUK-B06
L921	J2123462M	FERRITE BEADS TYPE B2.3UH
L931	J2123462M	FERRITE BEADS TYPE B2.3UH
L932	J2123462M	FERRITE BEADS TYPE B2.3UH
L935	J2123462M	FERRITE BEADS TYPE B2.3UH
L939	J2123462M	FERRITE BEADS TYPE B2.3UH
L955	J2123462M	FERRITE BEADS TYPE B2.3UH
L957	J2123462M	FERRITE BEADS TYPE B2.3UH
L961	L380184	BUCK COIL E20/10/5
L965	J2123462M	FERRITE BEADS TYPE B2.3UH
L992	J2123462M	FERRITE BEADS TYPE B2.3UH
LA01	JBH00034	HC-330K SI LH10TK
LA02	L380176	33UH PANASONIC ELC12E330
LA03	JBH00034	HC-330K SI LH10TK
LA04	L380176	33UH PANASONIC ELC12E330
LED2	T547049	SLR-325VC LED RED
LS201	J2122956M	COIL LAL 100UH K
LS42	J2123103M	LAL 02 AXIAL COIL 10uH
LS60	J2123103M	LAL 02 AXIAL COIL 10uH
P10	J2902261	PLG-02P2R5VPWB
P1015	J2902263	PLG-04P2R5VPWB
P302	J2902261	PLG-02P2R5VPWB
P303	J2902261	PLG-02P2R5VPWB
P701	J2661753	4 PIN PLUG WITH BASE
P802	J2902267	PLG-08P2R5V PWB
P803	J2902264	PLG-05P 2R5V PWB
P9	J2902261	PLG-02P2R5VPWB
P900	E825259	2 WAY MAIN HEADER UL BEAB
P902	J2661751	2P PIN PLUG & BASE
PA04	J2902263	PLG-04P2R5VPWB
PHONO2	E826951	STEREO PHONO SOCKET
Q002	T633153	2N7002 MOSFET
Q003	J2325691R	TRS 2SC2412K T146Q/R
Q004	J2325691R	TRS 2SC2412K T146Q/R
Q005	T633153	2N7002 MOSFET
Q006	J2325691R	TRS 2SC2412K T146Q/R
Q007	J2325691R	TRS 2SC2412K T146Q/R
Q008	J2325691R	TRS 2SC2412K T146Q/R
Q011	J2325691R	TRS 2SC2412K T146Q/R
Q200	J2325691R	TRS 2SC2412K T146Q/R
Q212	T631302	& DTC114YKAT146
Q213	T631302	& DTC114YKAT146
Q214	T631302	& DTC114YKAT146
Q215	T631302	& DTC114YKAT146
Q216	J2328161R	TRS 2SC4265JC02TR

A529449 PARTS LIST

I.D.	Part No.	Description
Q217	J2325691R	TRS 2SC2412K T146Q/R
Q330	J2325781R	TRS 2SA1037K T146Q/R
Q332A	J2325781R	TRS 2SA1037K T146Q/R
Q400	J2325691R	TRS 2SC2412K T146Q/R
Q401	J2325691R	TRS 2SC2412K T146Q/R
Q402	J2325691R	TRS 2SC2412K T146Q/R
Q403	J2325691R	TRS 2SC2412K T146Q/R
Q412	J2325781R	TRS 2SA1037K T146Q/R
Q413	J2316691R	STC-DTC144EK T146
Q501	J2325781R	TRS 2SA1037K T146Q/R
Q505	J2325781R	TRS 2SA1037K T146Q/R
Q507	J2325691R	TRS 2SC2412K T146Q/R
Q508	J2325691R	TRS 2SC2412K T146Q/R
Q509	J2325781R	TRS 2SA1037K T146Q/R
Q605	J2325691R	TRS 2SC2412K T146Q/R
Q606	J2325781R	TRS 2SA1037K T146Q/R
Q631	T636077	&IRFS530A ISOL SAMSUNG
Q631A	G884023	SPRING CLIP
Q701	T633137	TRANS BF459 MULLARD/SES
Q702	T732016	P0109DA THYRISTOR SGS
Q711	J2325781R	TRS 2SA1037K T146Q/R
Q751	J2315451	TRS-BU2508AF
Q751A	G884020	SPRING CLIP 56379-MULLARD
Q777	J2315891R	TRS JC548B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235418	POWER HEATSINK(TERNEX)
Q903B	G884020	SPRING CLIP 56379-MULLARD
Q904	T636077	&IRFS530A ISOL SAMSUNG
Q911	T636077	&IRFS530A ISOL SAMSUNG
Q912	T631309	TRANS BC557B BANDED
Q913	T633133	TRANS BF422 BAND MULL/AEG
Q919	J2315921R	TRS JC558B
Q922	J2315891R	TRS JC548B
Q923	T900796	&TL431CZ-AP SGS
Q927	T636094	MOSFET IRF640
Q927A	H224085	F9-4-220D-2LS
Q929	W024001	0.56ML SFT TIN'D COP WIRE
Q932	T633133	TRANS BF422 BAND MULL/AEG
Q951	J2315891R	TRS JC548B
Q964	T900473	SHUNT REG TL431CLP MOT/TEX
QA01	J2325691R	TRS 2SC2412K T146Q/R
QS40	J2325691R	TRS 2SC2412K T146Q/R
QS44	J2325781R	TRS 2SA1037K T146Q/R
QS60	J2325691R	TRS 2SC2412K T146Q/R
QS61	J2325781R	TRS 2SA1037K T146Q/R
R001	J0196093R	RMC73M-1F103JR
R002	J0196043R	RMC73M-1F101JR
R004	J0196093R	RMC73M-1F103JR
R005	J0196043R	RMC73M-1F101JR
R006	J0195883R	RMC73S 2A221JR
R007	J0195001R	RMC73 2B101JR
R008	J0196093R	RMC73M-1F103JR
R009	J0196093R	RMC73M-1F103JR
R010	J0196093R	RMC73M-1F103JR
R011	J0196093R	RMC73M-1F103JR
R012	J0196093R	RMC73M-1F103JR
R013	J0196043R	RMC73M-1F101JR
R014	J0196043R	RMC73M-1F101JR
R015	J0196043R	RMC73M-1F101JR
R016	J0196043R	RMC73M-1F101JR
R017	J0196093R	RMC73M-1F103JR
R018	J0196093R	RMC73M-1F103JR
R019	J0196086R	RMC73M-1F562JR
R020	J0196093R	RMC73M-1F103JR
R021	J0196068R	RMC73M-1F102JR
R022	J0196068R	RMC73M-1F102JR
R023	J0196068R	RMC73M-1F102JR
R024	J0195927R	RMC73S 2A123JR
R025	J0196095R	RMC73M - 1F123JR
R026	J0195032R	RMC73--2B393JR 1%
R027	J0196095R	RMC73M - 1F123JR
R028	J0195927R	RMC73S 2A123JR
R029	J0195933R	RMC73S 2A223JR
R030	J0195939R	RMC73S2A393JR
R031	J0195933R	RMC73S 2A223JR
R032	J0700054M	10K 1/16W C/FILM 5%
R033	J0196093R	RMC73M-1F103JR
R036	J0700054M	10K 1/16W C/FILM 5%
R037	J0195025R	RMC73 - 2B103JR
R038	J0196093R	RMC73M-1F103JR
R039	J0700049M	4K7 1/16W C/FILM 5%
R040	J0700041M	1K 1/16W C/FILM 5%
R041	J0700041M	1K 1/16W C/FILM 5%
R042	J0195875R	RMC73S 2A101JR
R043	J0700027M	100R 1/16W C/FILM 5%
R044	J0700027M	100R 1/16W C/FILM 5%
R045	J0196043R	RMC73M-1F101JR
R046	J0700027M	100R 1/16W C/FILM 5%
R047	J0196051R	RMC73M-1F221JR
R048U	J0700027M	100R 1/16W C/FILM 5%
R052	J0195875R	RMC73S 2A101JR
R053	J0196043R	RMC73M-1F101JR
R054	J0195013R	RMC73 2B102JR
R055	J0195013R	RMC73 2B102JR
R056	J0195013R	RMC73 2B102JR
R057	J0196093R	RMC73M-1F103JR
R058	J0196093R	RMC73M-1F103JR
R059	J0196093R	RMC73M-1F103JR
R060	J0196093R	RMC73M-1F103JR
R061	J0196093R	RMC73M-1F103JR
R062	J0196093R	RMC73M-1F103JR
R063	J0196043R	RMC73M-1F101JR
R064	J0196093R	RMC73M-1F103JR
R065	J0196043R	RMC73M-1F101JR
R066	J0195894R	RMC73S2A621JR 620R
R067	J0196093R	RMC73M-1F103JR
R070	J0196093R	RMC73M-1F103JR
R071	J0196093R	RMC73M-1F103JR
R074	J0195925R	RMC73S 2A103JR
R075	J0195941R	RMC73S 2A473JR

A529449 PARTS LIST

I.D.	Part No.	Description
R078	J0196093R	RMC73M-1F103JR
R079	J0196043R	RMC73M-1F101JR
R080	J0196043R	RMC73M-1F101JR
R081	J0196053R	RMC73M - 1F271JR
R082	J0196093R	RMC73M-1F103JR
R083	J0196043R	RMC73M-1F101JR
R084	J0196043R	RMC73M-1F101JR
R085	J0195875R	RMC73S 2A101JR
R090	J0700027M	100R 1/16W C/FILM 5%
R091	J0196043R	RMC73M-1F101JR
R092	J0196078R	RMC73M-1F272JR
R093	J0196043R	RMC73M-1F101JR
R094	J0196043R	RMC73M-1F101JR
R095	J0196043R	RMC73M-1F101JR
R096	J0196043R	RMC73M-1F101JR
R097	J0700027M	100R 1/16W C/FILM 5%
R098	R120330	100R 1/4W DRG NO
R099	J0196043R	RMC73M-1F101JR
R230	J0195918R	RMC73S 2A562JR
R257	J0700027M	100R 1/16W C/FILM 5%
R258	J0700027M	100R 1/16W C/FILM 5%
R259	J0195900R	RMC73S 2A102JR
R261	J0195250R	RMC73S 000R
R263	J0195885R	RMC73S 2A271JR
R264	J0195918R	RMC73S 2A562JR
R265	J0700038M	680R 1/16W C/FILM 5%
R266	J0196078R	RMC73M-1F272JR
R267	J0195018R	RMC73 2B272JR
R268	J0195910R	RMC73S-2A272JR
R269	J0195250R	RMC73S 000R
R270	J0195250R	RMC73S 000R
R271	J0195875R	RMC73S 2A101JR
R272	J0195920R	RMC73S 2A682JR
R273	J0196070R	RMC73M - 1F122JR
R274	J0196043R	RMC73M-1F101JR
R275	J0195893R	RMC73S 2A561JR
R276	J0195001R	RMC73 2B101JR
R277	J0195895R	RMC73S 2A681JR
R281	J0195885R	RMC73S 2A271JR
R282	J0195931R	RMC73S 2A183JR
R300	J0195943R	RMC73S-2A563JR
R303	J0195871R	RMC73S 2A750JR
R305	J0195871R	RMC73S 2A750JR
R306	J0195871R	RMC73S 2A750JR
R307	J0195875R	RMC73S 2A101JR
R309	J0195868R	RM73S 2A560JR 56R
R311	J0195871R	RMC73S 2A750JR
R314	J0195950R	RMC73S 2A104JR
R315	J0196093R	RMC73M-1F103JR
R317	J0195016R	RMC73--2B182JR 1K8 1206
R319	J0195001R	RMC73 2B101JR
R320	J0195871R	RMC73S 2A750JR
R321	J0196043R	RMC73M-1F101JR
R322	J0196043R	RMC73M-1F101JR
R323	J0195871R	RMC73S 2A750JR
R326	J0195871R	RMC73S 2A750JR
R330	J0195871R	RMC73S 2A750JR
R331	J0196043R	RMC73M-1F101JR
R332	J0195950R	RMC73S 2A104JR
R333	J0196043R	RMC73M-1F101JR
R334	J0195868R	RM73S 2A560JR 56R
R335	J0195871R	RMC73S 2A750JR
R336	J0196043R	RMC73M-1F101JR
R337	J0196043R	RMC73M-1F101JR
R338	J0195875R	RMC73S 2A101JR
R339	J0113722M	RDO5S2H750JB
R340	J0195875R	RMC73S 2A101JR
R342	J0195925R	RMC73S 2A103JR
R344	J0195906R	RMC73S--2A182JR
R346	J0700027M	100R 1/16W C/FILM 5%
R347	J0195001R	RMC73 2B101JR
R349	J0195875R	RMC73S 2A101JR
R350	J0195943R	RMC73S-2A563JR
R351	J0195895R	RMC73S 2A681JR
R352	J0196111R	RMC73M - 1F563JR
R353	J0195871R	RMC73S 2A750JR
R355	J0195871R	RMC73S 2A750JR
R356	J0195871R	RMC73S 2A750JR
R357	J0196093R	RMC73M-1F103JR
R358	J0195906R	RMC73S--2A182JR
R359	J0195871R	RMC73S 2A750JR
R360	J0196093R	RMC73M-1F103JR
R361	J0196093R	RMC73M-1F103JR
R389	J0196103R	RMC73M - 1F273JR
R390	J0195895R	RMC73S 2A681JR
R400	J0195900R	RMC73S 2A102JR
R401	J0195950R	RMC73S 2A104JR
R402	J0195945R	RMC73S 2A683JR
R403	J0195875R	RMC73S 2A101JR
R404	J0195943R	RMC73S-2A563JR
R405	J0195943R	RMC73S-2A563JR
R406	J0196059R	RMC73M-1F471JR
R407	J0195875R	RMC73S 2A101JR
R408	J0196068R	RMC73M-1F102JR
R409	J0113725M	100R RES CARBON FILM 1/2W
R410	J0196072R	RMC73M-1F152JR
R411	J0195900R	RMC73S 2A102JR
R412	J0196113R	RMC73M - 1F683JR
R413	J0196059R	RMC73M-1F471JR
R414	J0196043R	RMC73M-1F101JR
R415	J0196059R	RMC73M-1F471JR
R416	J0196043R	RMC73M-1F101JR
R417	J0195037R	RMC73 2B104JR
R419	J0195950R	RMC73S 2A104JR
R423	J0195950R	RMC73S 2A104JR
R424	J0195891R	RMC73S 2A471JR
R433	J0195875R	RMC73S 2A101JR
R434	J0195875R	RMC73S 2A101JR
R435	J0196066R	RMC73M - 1F911JR
R436	J0796491R	RMC73M-000R

A529449 PARTS LIST

I.D.	Part No.	Description
R437	J0796491R	RMC73M-000R
R438	J0196060R	RMC73M-1F511JR 510R
R439	J0196060R	RMC73M-1F511JR 510R
R440	J0196066R	RMC73M - 1F911JR
R441	J0196084R	RMC73M-1F472JR
R442	J0700034M	330R 1/16W C/FILM 5%
R446	J0195950R	RMC73S 2A104JR
R447	J0195891R	RMC73S 2A471JR
R448	J0196043R	RMC73M-1F101JR
R454	J0195950R	RMC73S 2A104JR
R465	J0196093R	RMC73M-1F103JR
R467	J0196093R	RMC73M-1F103JR
R469	J0195875R	RMC73S 2A101JR
R470	J0195875R	RMC73S 2A101JR
R471	J0700027M	100R 1/16W C/FILM 5%
R474	J0196043R	RMC73M-1F101JR
R475	J0196043R	RMC73M-1F101JR
R477	J0700027M	100R 1/16W C/FILM 5%
R478	J0700027M	100R 1/16W C/FILM 5%
R479	J0700027M	100R 1/16W C/FILM 5%
R480	J0700027M	100R 1/16W C/FILM 5%
R481	J0700027M	100R 1/16W C/FILM 5%
R482	J0700027M	100R 1/16W C/FILM 5%
R483	J0195875R	RMC73S 2A101JR
R484	J0195875R	RMC73S 2A101JR
R485	J0700027M	100R 1/16W C/FILM 5%
R486	J0195925R	RMC73S 2A103JR
R487	J0700027M	100R 1/16W C/FILM 5%
R488	J0195925R	RMC73S 2A103JR
R489	J0700027M	100R 1/16W C/FILM 5%
R490	J0700027M	100R 1/16W C/FILM 5%
R491	J0195925R	RMC73S 2A103JR
R492	J0195925R	RMC73S 2A103JR
R493	J0196068R	RMC73M-1F102JR
R494	J0196068R	RMC73M-1F102JR
R496	J0196088R	RMC73M-1F682JR
R497	J0196105R	RMC73M-1F333JR
R498	J0196043R	RMC73M-1F101JR
R499	J0196051R	RMC73M-1F221JR
R500	J0195929R	RMC73S 2A153JR
R501	J0195025R	RMC73 - 2B103JR
R502	J0196090R	RMC73M-1F822JR 8K2 0603
R504	J0196088R	RMC73M-1F682JR
R509	J0195939R	RMC73S2A393JR
R532	J0195875R	RMC73S 2A101JR
R533	J0195900R	RMC73S 2A102JR
R534	J0195875R	RMC73S 2A101JR
R535	J0195875R	RMC73S 2A101JR
R536	J0195875R	RMC73S 2A101JR
R537	J0195875R	RMC73S 2A101JR
R538	J0700027M	100R 1/16W C/FILM 5%
R539	J0700027M	100R 1/16W C/FILM 5%
R540	J0195875R	RMC73S 2A101JR
R541	J0195248R	RMC73--000R
R542	J0700027M	100R 1/16W C/FILM 5%
R543	J0700027M	100R 1/16W C/FILM 5%
R544	J0195887R	RMC73S 2A331JR
R545	J0195875R	RMC73S 2A101JR
R546	J0196043R	RMC73M-1F101JR
R547	J0196043R	RMC73M-1F101JR
R548	J0195007R	RMC73--2B331JR
R549	J0195879R	RMC73S 2A151JR
R550	J0196049R	RMC73M-1F181JR 180R 0603
R560	J0195001R	RMC73 2B101JR
R571	J0196068R	RMC73M-1F102JR
R586	J0195891R	RMC73S 2A471JR
R589	J0195910R	RMC73S-2A272JR
R600	J0196093R	RMC73M-1F103JR
R602	J0113684M	RNL-2R2J1-02LT
R603	J0113684M	RNL-2R2J1-02LT
R605	J0700075M	390K 1/16W C/FILM 5%
R606	J0195941R	RMC73S 2A473JR
R607	J0196043R	RMC73M-1F101JR
R608	J0195875R	RMC73S 2A101JR
R610	R232330	2K2 1/4W DRG NO
R611	R326330	360R 1/4W DRG NO
R612	R217330	27R 1/4W DRG NO
R613	R658330	680K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R616	J0196068R	RMC73M-1F102JR
R634	R232330	2K2 1/4W DRG NO
R635	R232330	2K2 1/4W DRG NO
R636	J0700051M	5K6 1/16W C/FILM 5%
R637	R120330	100R 1/4W DRG NO
R638	J0700049M	4K7 1/16W C/FILM 5%
R639	J0700049M	4K7 1/16W C/FILM 5%
R666	J0196068R	RMC73M-1F102JR
R667	J0700049M	4K7 1/16W C/FILM 5%
R702	R333330	3K3 1/4W DRG NO
R704	R648330	68K 1/4W DRG NO
R705	J0140931S	RSL-332J7WS(BSR-Z)
R706	R437571	4K7 2W 5% M02SL
R707	R135330	1K5 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R710	R217571	27R 2W 5% MO2SL
R710A	R217571	27R 2W 5% MO2SL
R711	R217571	27R 2W 5% MO2SL
R711A	R217571	27R 2W 5% MO2SL
R712	J0195925R	RMC73S 2A103JR
R713	J0100069M	RES FLM 1/8W 1.5K
R714	J0113748M	RD14S2H821JB
R715	J0110163S	RS08B3A562JS
R716	J0700054M	10K 1/16W C/FILM 5%
R717	J0700072M	220K 1/16W C/FILM 5%
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119649M	RN14S2B563FB(KOA)
R720	J0140933S	RSL-472J7WS(BSR-Z)
R724	J0110273S	RSO8B3D153JS
R725	R232570	2K2 1W 5% MO1SL
R731	R217571	27R 2W 5% MO2SL

A529449 PARTS LIST

I.D.	Part No.	Description
R731A	R217571	27R 2W 5% MO2SL
R732	R217571	27R 2W 5% MO2SL
R732A	R217571	27R 2W 5% MO2SL
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R531330	5K1 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R738	R232330	2K2 1/4W DRG NO
R740	R457330	470K 1/4W DRG NO
R742	J0113735M	RD14S2H271JB
R745	R437330	4K7 1/4W DRG NO
R746	R120571	100R 2W 5% M02SL
R749	R242330	22K 1/4W DRG NO
R752	J0700074M	330K 1/16W C/FILM 5%
R757	J0700063M	47K 1/16W C/FILM 5%
R759	R536330	5K6 1/4W DRG NO
R764	R150330	100K 1/4W DRG NO
R765	J0700027M	100R 1/16W C/FILM 5%
R767	J0195875R	RMC73S 2A101JR
R768	J0196093R	RMC73M-1F103JR
R769	J0195902R	RMC73S 2A122JR
R770	R140730	10K 2% 1/4W MFR4
R776	J0700073M	270K 1/16W C/FILM 5%
R778	J0700056M	15K 1/16W C/FILM 5%
R779	R120571	100R 2W 5% M02SL
R780	R232330	2K2 1/4W DRG NO
R901	R242571	22K 2W M02S
R902	R546330	56K 1/4W DRG NO
R903	R222330	220R 1/4W DRG NO
R905	R150330	100K 1/4W DRG NO
R906	R130330	1K 1/4W DRG NO
R908	R130330	1K 1/4W DRG NO
R909	J0147642	RW99J3Y220JM 22R 7W
R911	R132725	1K2 MRS16T 1% M/F 1/16W
R912	R842736	82K 1% MF MFR4
R913	R447330	47K 1/4W DRG NO
R915	R658725	680K MRS16T 1% M/F
R916	J0700049M	4K7 1/16W C/FILM 5%
R917	R658725	680K MRS16T 1% M/F
R920	R140330	10K 1/4W DRG NO
R921	R546736	56K MFR4 1% 1/4W
R922	R247725	27K MRS16T1% M/FILM
R927	J0110281S	RS08B3D333JS
R932	R120330	100R 1/4W DRG NO
R933	J0700049M	4K7 1/16W C/FILM 5%
R941	R536330	5K6 1/4W DRG NO
R942	R521330	510R 1/4W DRG NO
R943	R120330	100R 1/4W DRG NO
R944	R244725	24K MRS16T 1% 1/16W
R945	R140725	10K MRS16T 1% M/FILM
R946	J0147544	RW99J3H150JM 15R 5W
R950	R433725	4K3 MRS16T 1/16W 1%
R951	R110731	10R 1/2W M/F MFR5 2%
R952	J0700058M	22K 1/16W C/FILM 5%
R953	J0700049M	4K7 1/16W C/FILM 5%
R954	J0700049M	4K7 1/16W C/FILM 5%
R956	R000618	0.5R 2W WIRE WOUND 5%
R957	R323330	330R 1/4W DRG NO
R958	R842736	82K 1% MF MFR4
R959	R556725	560K MRS16T 1% M/FILM
R960	R133725	1K3 MRS16T 1% M/FILM
R961	J0700052M	6K8 1/16W C/FILM 5%
R962	R130330	1K 1/4W DRG NO
R963	J0700041M	1K 1/16W C/FILM 5%
R966	R130330	1K 1/4W DRG NO
R967	J0700072M	220K 1/16W C/FILM 5%
R968	R000618	0.5R 2W WIRE WOUND 5%
R969	R242330	22K 1/4W DRG NO
R970	R120330	100R 1/4W DRG NO
R971	J0144050	ERF5ZK122 1K2 KOA RES 5W
R972	R150744	&100K 3W PRO3 M/F LANCET
R975	J0700041M	1K 1/16W C/FILM 5%
R976	R323330	330R 1/4W DRG NO
R977	R120330	100R 1/4W DRG NO
R978	R427330	470R 1/4W DRG NO
R980	R100551	1R 1/4W FR8225(TDK)-BEAB-
R981	J0700064M	56K 1/16W C/FILM 5%
R982	R319330	39R 1/4W DRG NO
R985	J0187072M	2K0 1/16W PHILIPS
R986	R150330	100K 1/4W DRG NO
R987	R319330	39R 1/4W DRG NO
R988	J0700067M	100K 1/16W C/FILM 5%
R989	E441045	PTC TYPE 2322-662-96624
R990	R316330	36R 1/4W
R991	R353714	330K 1/2W METAL FLM-BEAB
R992	J0700058M	22K 1/16W C/FILM 5%
R993	J0700056M	15K 1/16W C/FILM 5%
R994	R323330	330R 1/4W DRG NO
R996	R427330	470R 1/4W DRG NO
R997	J0187092M	RD14S1J133JB
R998	R323571	330R 2W 5% MO2S F
R999	R170727	10M 1W VR68 UL BEAB
RA01	J0700027M	100R 1/16W C/FILM 5%
RA02	J0196093R	RMC73M-1F103JR
RA03	J0700047M	3K3 1/16W C/FILM 5%
RA04	J0700055M	12K 1/16W C/FILM 5%
RA05	R120330	100R 1/4W DRG NO
RA06	J0196101R	RMC73M-1F223JR 1608
RA07	J0196111R	RMC73M - 1F563JR
RA08	J0196113R	RMC73M - 1F683JR
RA09	J0196101R	RMC73M-1F223JR 1608
RA10	J0196111R	RMC73M - 1F563JR
RA11	J0196084R	RMC73M-1F472JR
RA12	J0196113R	RMC73M - 1F683JR
RA13	J0196093R	RMC73M-1F103JR
RA14	R120330	100R 1/4W DRG NO
RA15	J0196084R	RMC73M-1F472JR
RA16	J0196104R	RMC73M-1F303JR 30K 0603
RA17	J0195953R	RMC73S-2A134JR 130K
RA18	J0700012M	6R8 1/16W C/FILM 5%
RA19	J0195025R	RMC73 - 2B103JR

A529449 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
RA20	J0187086M	RD14S1J752JB	W002	EC5A100A	7/0.2MM S000030
RA21	J0195025R	RMC73 - 2B103JR	W003	EC5A060A	7/0.2MM S000030
RA22	J0187086M	RD14S1J752JB	W005	EC530603	7/0.2MM S000010
RA23	J0196078R	RMC73M-1F272JR	W008	EC5A120A	7/0.2 S000030
RA24	J0700054M	10K 1/16W C/FILM 5%	W009	EC5A060A	7/0.2MM S000030
RA25	J0196093R	RMC73M-1F103JR	W010	EC530903	7/0.2MM S000029
RA26	J0195916R	RMC73S 2A472JR	W018	EC530203	7/0.2MM S000010
RA27	R427748	470R 3W PRO3 5% TAPED	W019	EC530603	7/0.2MM S000010
RA31	J0796491R	RMC73M-000R	W020	EC530303	7/0.2MM S000010
RA32	J0196078R	RMC73M-1F272JR	W021	EC5A120A	7/0.2 S000030
RA33	J0195945R	RMC73S 2A683JR	W022	EC530903	7/0.2MM S000029
RA34	J0195945R	RMC73S 2A683JR	W023	EC530203	7/0.2MM S000010
RA35	J0195910R	RMC73S-2A272JR	W024	EC5A110A	7/0.2MM S000030
RA36	J0196045R	RMC73M-1F121JR 120R 1608	X001	E516081F	CRYSTAL 6MHZ
RA37	J0196045R	RMC73M-1F121JR 120R 1608	X200	E518054	K9453M
RA38	J0196118R	RMC73M-1F104JR 100K	X219	E518053	K3953M
RA39	J0196030R	RMC73M-1F330JR 33R	X305	L420187	BLM11A102S
RA40	J0196118R	RMC73M-1F104JR 100K	X412	E516070	X'TAL 18.432MHZ
RA41	J0196030R	RMC73M-1F330JR 33R	X513	E516030F	12MHz X'TAL NDK 5MM LEG
RA45	J0113725M	100R RES CARBON FILM 1/2W	Z005	T536219	BZX79B3V3~PHILIPS~
RM01	J0196043R	RMC73M-1F101JR	Z006	T536312	PDZ-B 3.6B 2% SMT ZENER
RM02	J0196043R	RMC73M-1F101JR	Z007	T536279	BZX284-C5V6 5% S MOUNT
RM05	J0195001R	RMC73 2B101JR	Z008	T536279	BZX284-C5V6 5% S MOUNT
RM06	J0196043R	RMC73M-1F101JR	Z014	T536312	PDZ-B 3.6B 2% SMT ZENER
RM07	J0700027M	100R 1/16W C/FILM 5%	Z205	T536215	BZX 79C 33V~PHILIPS~
RM08	J0196043R	RMC73M-1F101JR	Z404	T536181	BZX79C 13V~PHILIPS~
RM09	J0196043R	RMC73M-1F101JR	Z501	T536184	BZX79C 9V1~PHILIPS~
RM10	J0196043R	RMC73M-1F101JR	Z502	T536184	BZX79C 9V1~PHILIPS~
RM13	J0196093R	RMC73M-1F103JR	Z503	T536184	BZX79C 9V1~PHILIPS~
RM14	J0196093R	RMC73M-1F103JR	Z504	T536184	BZX79C 9V1~PHILIPS~
RM15	J0195025R	RMC73 - 2B103JR	Z505	T536284	BZX284-C9V1
RM16	J0195025R	RMC73 - 2B103JR	Z506	T536284	BZX284-C9V1
RM17	J0196093R	RMC73M-1F103JR	Z507	T536277	BZX284-C 4V7 5%
RM51	J0700054M	10K 1/16W C/FILM 5%	Z600	T536178	BZX79C 3V3~PHILIPS~
RS40	J0700049M	4K7 1/16W C/FILM 5%	Z601	T536178	BZX79C 3V3~PHILIPS~
RS41	J0195900R	RMC73S 2A102JR	Z603A	T536173	BZX79C18V~PHILIPS~
RS46	J0196118R	RMC73M-1F104JR 100K	Z603B	T536215	BZX 79C 33V~PHILIPS~
RS47	J0196068R	RMC73M-1F102JR	Z604	T536259	BZX79C56V
RS49	J0700041M	1K 1/16W C/FILM 5%	Z607	T536284	BZX284-C9V1
RS60	J0196118R	RMC73M-1F104JR 100K	Z608	T536284	BZX284-C9V1
RS61	J0196084R	RMC73M-1F472JR	Z610	T536173	BZX79C18V~PHILIPS~
RS62	J0700041M	1K 1/16W C/FILM 5%	Z615	T536172	BZX79C27V~PHILIPS~
RS64	J0195900R	RMC73S 2A102JR	Z616	T536280	BZX284-C6V2
RS65	J0195900R	RMC73S 2A102JR	Z703	T536235	BZX79B18V~PHILIPS~
S001	E139506	5 WAY TACT SWITCH	Z713	J2339251M	HZS36-ILT
SCART1	E826946	A20 DOUBLE SCART	Z741	T536259	BZX79C56V
SCART2	E826945	SINGLE SCART METALLO	Z744	T536227	BZX79B7V5~PHILIPS~
SHROUD	X321241	&ACTUATOR SHROUD	Z900	T536266	BZV85-C27V
SW900	J2634732	SWITCH SDD-FC BEAB	Z927	T536173	BZX79C18V~PHILIPS~
T700	JBW01041	FBT HFL1532G BEABT	Z942	T536179	BZX79C 6V2~PHILIPS~
T702	J2260291U	H DRIVE TRANSFORMER TAW	Z964	T536236	BZX79B22V~PHILIPS~
T900	L380172	SW MODE EE4215 OREGA BEAB	Z990	T536173	BZX79C18V~PHILIPS~
T902	L380181	SW MODE XXXX CT286D8 BEAB	Z991	T536173	BZX79C18V~PHILIPS~
VR904	E311108	500R POT HORIZONTAL TAPE	Z992	T536173	BZX79C18V~PHILIPS~
VR964	J0160211R	EVND8AA03B13-TAPE(PANA)	ZA01	T536279	BZX284-C5V6 5% S MOUNT

A529449 PARTS LIST

I.D.	Part No.	Description
ZA08	T536268	BZV85-C22V
ZA10	T536172	BZX79C27V~PHILIPS~
ZR048A	W470200	1MM 1/D SLEEVING BLACK
ZR048B	W470200	1MM 1/D SLEEVING BLACK
ZS42	T536271	BZX284-C2V7
ZS60	T536271	BZX284-C2V7
ZZA08	W470200	1MM 1/D SLEEVING BLACK

A529450 PARTS LIST

I.D.	Part No.	Description
#15	E573018	FERRITE CLAMP CORE
#200	J3731082	PURSE LOCK
#27	L350016	FERRITE CORE
#270	J2123462M	FERRITE BEADS TYPE B2.3UH
#40	E573018	FERRITE CLAMP CORE
#4069	J3731082	PURSE LOCK
#500	E573018	FERRITE CLAMP CORE
#5000	N937052	CHASSIS FRAME
#5071	G291311	3X12 BT SCREW (BLACK)
#5072	G291311	3X12 BT SCREW (BLACK)
#5073	G291311	3X12 BT SCREW (BLACK)
#5075	N332067	SPACER
#5075	N332067	SPACER
#67	J3731082	PURSE LOCK
#68	J3731082	PURSE LOCK
#802	G864006	CABLE TIE T18R
#E802	JBM00041	FERRITE CORES BP53RB
AV300	JEU00581	PHONO-S/VHS CONNECTOR
B001	PC55002	A20 MAIN PCB BEAB
C001	J0893179R	CKM-104K160B-CNT1608
C002	J0893027R	CKM-104K250B-CNT2125
C003	J0800271R	ELECT CAP 0.1UF 50V SMG
C004	J0800282R	CAP ELECTRO 2.2UF-M 50V
C005	J0800291R	CAP ELEC 10uF 16V SMG
C007	J0800282R	CAP ELECTRO 2.2UF-M 50V
C008	J0800291R	CAP ELEC 10uF 16V SMG
C009	J0800291R	CAP ELEC 10uF 16V SMG
C010	J0893179R	CKM-104K160B-CNT1608
C011	J0893179R	CKM-104K160B-CNT1608
C012	J0893027R	CKM-104K250B-CNT2125
C013	J0227219R	CK73B1H104KR 100N 1206
C014	J0800317R	CP ELECTRO 47UF SMG 16
C015	J0893179R	CKM-104K160B-CNT1608
C016	J0228042R	CC73SCH1H330JR
C017	J0228042R	CC73SCH1H330JR
C019	J0893222R	CKM-103K500B-CNT1608
C020	J0800271R	ELECT CAP 0.1UF 50V SMG
C202	J0800364F	CAP ELECT 1000UF 50V SMG
C203	J0800361F	CAP ELEC 1000UF-M SMG 16V
C204	J0227219R	CK73B1H104KR 100N 1206
C205	J0800317R	CP ELECTRO 47UF SMG 16
C206	J0893044R	CKM 103K500B CNT2125
C208	J0800291R	CAP ELEC 10uF 16V SMG
C209	J0893044R	CKM 103K500B CNT2125
C210	J0893222R	CKM-103K500B-CNT1608
C211	J0893123R	CC73MCH1H560JR
C212	J0893113R	CC73MCH1H100C
C213	J0893044R	CKM 103K500B CNT2125
C215	J0893222R	CKM-103K500B-CNT1608
C220	J0893044R	CKM 103K500B CNT2125
C301	J0800352R	ELEC CAP 470UF 10V SMG
C302	J0227009R	CK73B1H102KR 1N 1206
C303	J0893027R	CKM-104K250B-CNT2125
C304	J0893027R	CKM-104K250B-CNT2125
C305	J0880194R	0.1UF 50V +-5% (100N)
C309	J0800352R	ELEC CAP 470UF 10V SMG
C310	J0893031R	CKM 102K500B CNT2125
C312	J0893179R	CKM-104K160B-CNT1608
C313	J0893027R	CKM-104K250B-CNT2125
C318	J0893027R	CKM-104K250B-CNT2125
C324	J0893179R	CKM-104K160B-CNT1608
C325	J0893179R	CKM-104K160B-CNT1608
C326	J0893179R	CKM-104K160B-CNT1608
C327	J0880194R	0.1UF 50V +-5% (100N)
C328	J0893027R	CKM-104K250B-CNT2125
C329	J0893027R	CKM-104K250B-CNT2125
C331	J0800326R	CEL-101M160WMFT
C332	J0800317R	CP ELECTRO 47UF SMG 16
C345	J0227219R	CK73B1H104KR 100N 1206
C369	J0800326R	CEL-101M160WMFT
C370	J0893027R	CKM-104K250B-CNT2125
C371	J0800326R	CEL-101M160WMFT
C372	J0893027R	CKM-104K250B-CNT2125
C373	J0800326R	CEL-101M160WMFT
C374	J0227219R	CK73B1H104KR 100N 1206
C401	J0893208R	CKM-102K500B-CNT1608
C403	J0893126R	CCM-101J500CHCNT1608
C404	J0800294R	ELECT CAP 10UF 50V SMG
C405	J0893031R	CKM 102K500B CNT2125
C406	J0228054R	CC73SCH1H101JR
C407	J0800294R	ELECT CAP 10UF 50V SMG
C408	J0893031R	CKM 102K500B CNT2125
C410	J0227009R	CK73B1H102KR 1N 1206
C411	J0228054R	CC73SCH1H101JR
C412	J0893031R	CKM 102K500B CNT2125
C413	J0228054R	CC73SCH1H101JR
C414	J0800294R	ELECT CAP 10UF 50V SMG
C415	J0893031R	CKM 102K500B CNT2125
C416	J0800294R	ELECT CAP 10UF 50V SMG
C417	J0893208R	CKM-102K500B-CNT1608
C420	J0800291R	CAP ELEC 10uF 16V SMG
C422	J0893031R	CKM 102K500B CNT2125
C423	J0893027R	CKM-104K250B-CNT2125
C424	J0800291R	CAP ELEC 10uF 16V SMG
C425	J0893027R	CKM-104K250B-CNT2125
C429	J0893208R	CKM-102K500B-CNT1608
C430	J0893208R	CKM-102K500B-CNT1608
C431	J0227449R	CK73B1E334ZR 330N 25V
C432	J0227449R	CK73B1E334ZR 330N 25V
C433	J0227449R	CK73B1E334ZR 330N 25V
C434	J0227449R	CK73B1E334ZR 330N 25V
C435	J0800291R	CAP ELEC 10uF 16V SMG
C436	J0800294R	ELECT CAP 10UF 50V SMG
C437	J0800291R	CAP ELEC 10uF 16V SMG
C438	J0893179R	CKM-104K160B-CNT1608
C439	C353883	GRM40Y5V334Z16PT
C440	J0893027R	CKM-104K250B-CNT2125
C441	J0227449R	CK73B1E334ZR 330N 25V
C442	J0227449R	CK73B1E334ZR 330N 25V
C443	J0893248R	CKM-334Z160B-CNT1608

A529450 PARTS LIST

I.D.	Part No.	Description
C444	C353883	GRM40Y5V334Z16PT
C445	C353883	GRM40Y5V334Z16PT
C446	C353883	GRM40Y5V334Z16PT
C447	C353883	GRM40Y5V334Z16PT
C448	C353883	GRM40Y5V334Z16PT
C449	J0893027R	CKM-104K250B-CNT2125
C450	J0800291R	CAP ELEC 10uF 16V SMG
C451	J0800294R	ELECT CAP 10UF 50V SMG
C452	J0893197R	CKM-223K250B-CNT1608
C454	J0893027R	CKM-104K250B-CNT2125
C455	J0893123R	CC73MCH1H560JR
C456	J0893123R	CC73MCH1H560JR
C457	J0893123R	CC73MCH1H560JR
C458	J0893126R	CCM-101J500CHCNT1608
C459	C608886	& GRM40COG6R8D50PT 6.8PF
C460	C608886	& GRM40COG6R8D50PT 6.8PF
C461	J0893123R	CC73MCH1H560JR
C462	J0893213R	CC73MCH1H222JR
C463	J0893179R	CKM-104K160B-CNT1608
C465	J0800294R	ELECT CAP 10UF 50V SMG
C466	J0800353R	CAP ELECTRO 470UF 16V
C467	J0800294R	ELECT CAP 10UF 50V SMG
C468	J0893031R	CKM 102K500B CNT2125
C470	J0893179R	CKM-104K160B-CNT1608
C471	J0800327R	ELECT CAP 100UF 25V SMG
C500	J0893039R	CKM 472K500B CNT 2125
C501	J0800279R	ELECT CAP 1.UF 50V
C502	J0195250R	RMC73S 000R
C503	J0893044R	CKM 103K500B CNT2125
C504	J0800279R	ELECT CAP 1.UF 50V
C506	J0890087R	CAP CERAMIC 1000pf-B 50V
C508	J0893222R	CKM-103K500B-CNT1608
C509	J0893222R	CKM-103K500B-CNT1608
C510	J0227436R	0.22U +/-10% 1206 SMT
C511	J0893206R	680PF +/-10% 0603 SMT
C518U	C150711	CAP 100N 36521104 100V POL
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
C572	J0228066R	GRM40CDG331J50PT
C575	J0893027R	CKM-104K250B-CNT2125
C576	J0893048R	CKM-223K500B-CNT2125
C577	J0893027R	CKM-104K250B-CNT2125
C578	J0893027R	CKM-104K250B-CNT2125
C579	J0893027R	CKM-104K250B-CNT2125
C581	J0880016R	POLY CAP FLM 0.1UF 50V
C582	J0893027R	CKM-104K250B-CNT2125
C583	J0195250R	RMC73S 000R
C585	J0800372F	CEL 332 M160WNL SMG 5MM
C586	J0893027R	CKM-104K250B-CNT2125
C588	J0893027R	CKM-104K250B-CNT2125
C589	J0893039R	CKM 472K500B CNT 2125
C590	J0195250R	RMC73S 000R
C591	J0195250R	RMC73S 000R
C592	J0195250R	RMC73S 000R
C593	J0800279R	ELECT CAP 1.UF 50V
C594	J0228038R	CC73SCH1H220JR
C595	J0228038R	CC73SCH1H220JR
C596	J0893027R	CKM-104K250B-CNT2125
C597	J0800372F	CEL 332 M160WNL SMG 5MM
C598	C457884	&GRM40X7R474K25PT 470N
C599	J0893035R	CKM--222K500B CNT2125
C602	J0800337R	CEL-221M350WMFT
C603	J0800329R	ELECT CAP 100UF 50V SMG
C604	J0880044R	CAP POLYESTER 0.01UF K50V
C605	C150711	CAP 100N 36521104 100V POL
C606	J0893027R	CKM-104K250B-CNT2125
C607	J0893027R	CKM-104K250B-CNT2125
C610	J0890092R	CAP CERAMIC 0.0022uF 50V
C616	J0800339F	CAP ELECT 220UF 63V
C617	J0227009R	CK73B1H102KR 1N 1206
C620	J0893027R	CKM-104K250B-CNT2125
C621	J0893208R	CKM-102K500B-CNT1608
C639	J0800292R	CAP ELECT 10UF 25V SMG
C644	J0890092R	CAP CERAMIC 0.0022uF 50V
C701	J0243507R	CK45B2H331KB
C702	J0257540F	ELEC CAP 4U7 250V
C703	C140760	10n 2KV R/EVOX PHE428
C704	JAJ00138F	CC-222K202R-DF 2N2 2KV
C705	J0299993F	CAP 18NF 5% 630V POLY
C706	J0890087R	CAP CERAMIC 1000pf-B 50V
C707	JAJ00134R	CK45-R3DD102K 1N 2KV
C708	J0244505R	CER CAP 2n2-K 500V
C709	J0253953R	CE04W2C2R2M
C710	J0253953R	CE04W2C2R2M
C711	C353764	&330N MKP379 44334
C712	C353764	&330N MKP379 44334
C713	C353764	&330N MKP379 44334
C714	C158764	180N MKP379 44184
C715	J0243512R	CK45B2H821KB
C716	C140707	CAP 10N 365-51103 MULARD
C719	J0257540F	ELEC CAP 4U7 250V
C720	J0880033R	CQM-152K500HFT
C724	JAJ00121R	CK45-R3DD101K 100PF 2KV
C726	J0800336R	CAP ELEC 220UF M SMG 25V
C727	J0243507R	CK45B2H331KB
C732	J0800291R	CAP ELEC 10uF 16V SMG
C735U	J0880044R	CAP POLYESTER 0.01UF K50V
C737	C160708	1UF +-10% 250V 368-45105
C740	J0244509R	CER CAP 4700PF-K 500V
C741	J0244509R	CER CAP 4700PF-K 500V
C742	J0800337R	CEL-221M350WMFT
C743	J0880053R	CQ93M1H473KEB(MF) N/PAN
C747	J0250511R	CAP POLY 0.022UF PHILIPS
C748	JAJ00134R	CK45-R3DD102K 1N 2KV
C749	J0880194R	0.1UF 50V +-5% (100N)
C764	J0800279R	ELECT CAP 1.UF 50V
C769	JAJ00134R	CK45-R3DD102K 1N 2KV
C770	J0800292R	CAP ELECT 10UF 25V SMG
C900	C150763	&100NF 20% X2 275V BEABT
C901	J0262774N	0.22UF 250VAC X2 ~BEABT
C902	J0262774N	0.22UF 250VAC X2 ~BEABT

A529450 PARTS LIST

I.D.	Part No.	Description	I.D.	Part No.	Description
C903	J0890083R	CK45 B1H471KB	C999	C232753	2N2 4KVAC PME294 UL BEABT
C904	C648763	&68NF 20% X2 275V BEABT	CA01U	J0880198R	POLY CAP 0.22UF-J 50V
C905	C001561	ELECT CAP 100UF 250V	CA02U	J0880198R	POLY CAP 0.22UF-J 50V
C908	J0800329R	ELECT CAP 100UF 50V SMG	CA03	J0880198R	POLY CAP 0.22UF-J 50V
C909	J0800352R	ELEC CAP 470UF 10V SMG	CA04	J0893031R	CKM 102K500B CNT2125
C910	J0880044R	CAP POLYESTER 0.01UF K50V	CA05	J0893031R	CKM 102K500B CNT2125
C911	J0800328R	CEL-101M350WMFT	CA06	J0893118R	CCM-270J500CHCNT1608
C912	J0244505R	CER CAP 2n2-K 500V	CA07	C001550	4700UF 25V SMG S/LEG
C913	J0800327R	ELECT CAP 100UF 25V SMG	CA08	J0893135R	CC73MCH1H471JR 1608
C914	C005046	ELECT 1000UF 25V LXY	CA09	J0893179R	CKM-104K160B-CNT1608
C915	J0800354R	470UF 25V SMG	CA10	J0893133R	CC73MCH1H331JR
C916	C005046	ELECT 1000UF 25V LXY	CA11	J0893135R	CC73MCH1H471JR 1608
C917	J0880048R	CQT223K50MB (PANASONIC)	CA12	J0893135R	CC73MCH1H471JR 1608
C918	C001561	ELECT CAP 100UF 250V	CA13	J0284623R	CEL-1R0M500WMFT(BP)E
C919	J0890078R	CK45B1H221KB (MURATA)	CA14	C001550	4700UF 25V SMG S/LEG
C920	C001561	ELECT CAP 100UF 250V	CA15	C343882	GRM40X7R333K50-550
C921	C001561	ELECT CAP 100UF 250V	CA16	J0880198R	POLY CAP 0.22UF-J 50V
C922	J0880037R	CQM332K500HFT	CA17	J0893208R	CKM-102K500B-CNT1608
C923	J0880037R	CQM332K500HFT	CA18	J0893208R	CKM-102K500B-CNT1608
C924	J0800294R	ELECT CAP 10UF 50V SMG	CA20	J0893027R	CKM-104K250B-CNT2125
C925	JAJ00121R	CK45-R3DD101K 100PF 2KV	CA21	J0228070R	MINI CHIP 470PF-J CH 50V
C926	JAJ00127R	CK45-R3DD 331K	CA22	J0893133R	CC73MCH1H331JR
C927	JAJ00121R	CK45-R3DD101K 100PF 2KV	CA24	J0893027R	CKM-104K250B-CNT2125
C929	J0800327R	ELECT CAP 100UF 25V SMG	CA25	J0880064R	CQM - 334J500HFT
C931	JAJ00138F	CC-222K202R-DF 2N2 2KV	CA27	J0893031R	CKM 102K500B CNT2125
C932	J0880037R	CQM332K500HFT	CA28	J0284623R	CEL-1R0M500WMFT(BP)E
C933	J0253491F	ELEC CAP 100UF 200V	CA29	C343882	GRM40X7R333K50-550
C936	J0880051R	CQ93M1H333KEB PANASONIC	CA30	J0893208R	CKM-102K500B-CNT1608
C942	J0880042R	CQ93M1H682KEB(MF) N/PAN	CA31	J0800291R	CAP ELEC 10uF 16V SMG
C950	J0259431F	ELEC CAP 220UF 200V	CA32	J0893179R	CKM-104K160B-CNT1608
C951	J0800362F	CAP ELECT 1000UF 25V SMG	CA33	J0893179R	CKM-104K160B-CNT1608
C952	J0800362F	CAP ELECT 1000UF 25V SMG	CA34	J0893222R	CKM-103K500B-CNT1608
C953	J0243509R	CERAMIC CAP 470p 500V	CA35	J0800316R	47u 10V ELECT CAP SMG
C954	J0243509R	CERAMIC CAP 470p 500V	CA36	J0800316R	47u 10V ELECT CAP SMG
C955	JAJ00129R	CK45-R3DD 471K	CA37	J0800325R	CEL-101M100WMFT
C957	J0243509R	CERAMIC CAP 470p 500V	CA38	J0800325R	CEL-101M100WMFT
C959	J0800353R	CAP ELECTRO 470UF 16V	CA39	J0893219R	CCM-682K500B-CNT1608
C960	J0244501R	CER CAP 1000PF-K 500V	CA40	J0893042R	CKM 682K500B CNT2125
C961	J0244501R	CER CAP 1000PF-K 500V	CA41	J0800325R	CEL-101M100WMFT
C962	J0244501R	CER CAP 1000PF-K 500V	CA42	J0284623R	CEL-1R0M500WMFT(BP)E
C963	J0244501R	CER CAP 1000PF-K 500V	CA44	J0284623R	CEL-1R0M500WMFT(BP)E
C964	J0243511R	CER CAP 680PF-K 500V	CS20	J0800326R	CEL-101M160WMFT
C967	J0243509R	CERAMIC CAP 470p 500V	CS40B	JAA00381R	10UF 6.3V SMT 3216
C970	J0800345R	ELECT CAP 330UF 25V SMG	CS44	J0893126R	CCM-101J500CHCNT1608
C971	J0880044R	CAP POLYESTER 0.01UF K50V	CS45	J0893126R	CCM-101J500CHCNT1608
C977	J0243509R	CERAMIC CAP 470p 500V	CS60B	JAA00381R	10UF 6.3V SMT 3216
C986	J0800328R	CEL-101M350WMFT	CS62	J0893126R	CCM-101J500CHCNT1608
C987	J0800352R	ELEC CAP 470UF 10V SMG	CS63	J0893126R	CCM-101J500CHCNT1608
C990	J0880048R	CQT223K50MB (PANASONIC)	CU01	J0800359R	CEL-102M100WMFT
C991	E884110	SPARK GAP 10N 2KV SDUK 16	D001	T531069	SHOTTKY 30V/200mA/BAT254
C992	J0880044R	CAP POLYESTER 0.01UF K50V	D002	T531067	DIODE BAS216 S/MOUNT
C993	C150891	100N 500V CAP	D003	T531067	DIODE BAS216 S/MOUNT
C994	J0800327R	ELECT CAP 100UF 25V SMG	D004	T531069	SHOTTKY 30V/200mA/BAT254
C995	J0880037R	CQM332K500HFT	D006	T531069	SHOTTKY 30V/200mA/BAT254
C997	J0880031R	CQ93M1H102KEB (MF) N/PAN	D007	T531069	SHOTTKY 30V/200mA/BAT254

A529450 PARTS LIST

I.D.	Part No.	Description
D008	T531069	SHOTTKY 30V/200mA/BAT254
D009	T531069	SHOTTKY 30V/200mA/BAT254
D011	J2343963M	MPG06J (TAPE) GI
D015	T531067	DIODE BAS216 S/MOUNT
D016	T531069	SHOTTKY 30V/200mA/BAT254
D017	T531069	SHOTTKY 30V/200mA/BAT254
D018	T531069	SHOTTKY 30V/200mA/BAT254
D206	T531067	DIODE BAS216 S/MOUNT
D208	T531067	DIODE BAS216 S/MOUNT
D209	T531067	DIODE BAS216 S/MOUNT
D301	T531068	DIODE MA723/TP PANASONIC
D501	T531067	DIODE BAS216 S/MOUNT
D502	T531056	DIODE BYV10-40 ~MULLARD
D503	T531056	DIODE BYV10-40 ~MULLARD
D507	T531067	DIODE BAS216 S/MOUNT
D508	J2348921M	DIODE 1N4531
D522	T531068	DIODE MA723/TP PANASONIC
D523	T531069	SHOTTKY 30V/200mA/BAT254
D601	J2348921M	DIODE 1N4531
D603	T531067	DIODE BAS216 S/MOUNT
D604	T431113	DIODE BYD33J MULL BEAB
D607	T531053	DIODE IN4148 MULL/PHIL/ITT
D608	T531053	DIODE IN4148 MULL/PHIL/ITT
D610	T431113	DIODE BYD33J MULL BEAB
D611	T431113	DIODE BYD33J MULL BEAB
D622	J2343962M	MPG06G
D645	T536259	BZX79C56V
D701	T431113	DIODE BYD33J MULL BEAB
D702	T431113	DIODE BYD33J MULL BEAB
D703	J2343941M	RGP10G
D706	T431117F	DIODE BY228 P/F PHILIPS
D707	T531086F	BYW96E
D708	J2336612	RU3AM
D711	T531086F	BYW96E
D713	T431113	DIODE BYD33J MULL BEAB
D714	T431113	DIODE BYD33J MULL BEAB
D715	J2348921M	DIODE 1N4531
D716	J2348921M	DIODE 1N4531
D735	T431113	DIODE BYD33J MULL BEAB
D739	J2348921M	DIODE 1N4531
D745	J2348921M	DIODE 1N4531
D904	J2348921M	DIODE 1N4531
D905	T431113	DIODE BYD33J MULL BEAB
D906	T431113	DIODE BYD33J MULL BEAB
D907	T531055	DIODE BAT85 SCHOTTKY MULL
D910	J2348921M	DIODE 1N4531
D911	J2348921M	DIODE 1N4531
D913	J2348921M	DIODE 1N4531
D914	J2348921M	DIODE 1N4531
D915	T431113	DIODE BYD33J MULL BEAB
D916	T431113	DIODE BYD33J MULL BEAB
D919	T531086F	BYW96E
D920	J2342711M	DIODE EM2A (SANKEN)
D921	J2342711M	DIODE EM2A (SANKEN)
D922	J2342711M	DIODE EM2A (SANKEN)
D923	J2342711M	DIODE EM2A (SANKEN)
D924	J2342711M	DIODE EM2A (SANKEN)
D925	T431122	DIODE BYV28-200~PHILIPS~
D927	J2348921M	DIODE 1N4531
D931	J2342711M	DIODE EM2A (SANKEN)
D933	T536259	BZX79C56V
D934	T431114	& BYD33M
D939	T431113	DIODE BYD33J MULL BEAB
D953	T431145	BYW29E-200
D953A	H224075	H/SINK F9-4-220 &TAG COL
D955	T431127	BYR29F-700
D955A	H235369	FI2-32-2LA-2 HEATSINK
D955B	G291023	M2.5x8 TAPTITE SCREW
D955C	G560333	M2.5 SPRING WASHER
D960	J2342711M	DIODE EM2A (SANKEN)
D961	J2342711M	DIODE EM2A (SANKEN)
D962	J2342711M	DIODE EM2A (SANKEN)
D963	J2342711M	DIODE EM2A (SANKEN)
D970	T431113	DIODE BYD33J MULL BEAB
D977	T431122	DIODE BYV28-200~PHILIPS~
D982	J2348921M	DIODE 1N4531
D984	T531053	DIODE IN4148 MULL/PHIL/ITT
D991	T431113	DIODE BYD33J MULL BEAB
D992	T431120	DIODE BYV27-150 ~MULLARD~
D994	T531055	DIODE BAT85 SCHOTTKY MULL
D995	T531053	DIODE IN4148 MULL/PHIL/ITT
D996	J2348921M	DIODE 1N4531
D997U	J2348921M	DIODE 1N4531
DA01	T531067	DIODE BAS216 S/MOUNT
DA02	J2348921M	DIODE 1N4531
DA03	T531067	DIODE BAS216 S/MOUNT
DS42	T531067	DIODE BAS216 S/MOUNT
DS60	T531067	DIODE BAS216 S/MOUNT
E002	E843366	OSD SHIELDED LEAD
E04	E843369	SPEAKER LEAD
E10	E846825	A5 SCREEN LD 2PIN EHUK
E1015	E843304	4 WAY LD 430mm(PS06/E413)
E206	E843314	CPT EARTH LEAD
E207	E843314	CPT EARTH LEAD
E208	E843286	GROUND LEAD FEMALE
E30	E846825	A5 SCREEN LD 2PIN EHUK
E500	E843376	OSD SHIELDED LEAD
E601	J2661752	3P PLUG PIN/BASE UL BEAB
E802	E843351	A20 8 WAY CRT BASE LEAD
E803	E846902	A7 CRT BASE LEAD 550mm
F900	J2722446	FUS-4A T4AH 250V BEABT
F900A	J2721792	FUSE HOLDER UL/BEAB
F901	E882359	FUSE GLASS T2.0AL BEABT
F901A	J2721792	FUSE HOLDER UL/BEAB
HS01	E826160	H/P SKT HSJ3000-01-010
I001	T900956	LE33CZ TO92
I003	E730303	IC M8_IP
I003A	E823935	52WAY IC SKT ~ FELCO
I004	T900779	74HC595
I006	T900989	M24C16-W SMT

A529450 PARTS LIST

I.D.	Part No.	Description
I007	T900980	M62703ML
I302	T900762	IC 4053 SO16N
I303	T900762	IC 4053 SO16N
I304	T900762	IC 4053 SO16N
I401	T900936	MSP3410D C5
I403	T901002	BA10358
I501	T900959	TDA8879
I601	T900951	TDA8358J
I601A	H235475	HEATSINK A20
I601B	G884020	SPRING CLIP 56379-MULLARD
I900	T900452	UC3844 SGS/UNITRODE
I902	T900815	& UC3843N SGS
I903	T901000	L78M05CV 500MA REGULATOR
I903A	H224085	F9-4-220D-2LS
I904	T900345	REG 7805 SGS/MOTO/NEC
I904A	G884023	SPRING CLIP
I905	T900963	IC VIPER 20
I905A	H224085	F9-4-220D-2LS
I943	T900796	&TL431CZ-AP SGS
I964	T548013	CNY17F1/6 SIEMENS BEABT
I997	T548016	PC817B OPTO BEAB
I998	T548016	PC817B OPTO BEAB
I999	T548013	CNY17F1/6 SIEMENS BEABT
IA01	T900955	TDA7490L
IA04	T900978	TDA2822D SO8
IR01	T549018	& IR REC TSOP2838UH1 TEMIC
K118	J0796491R	RMC73M-000R
K120	J0195248R	RMC73--000R
K121	J0195248R	RMC73--000R
K126	J0796491R	RMC73M-000R
K129	J0195250R	RMC73S 000R
K132	J0195248R	RMC73--000R
K133	J0796491R	RMC73M-000R
K135	J0195248R	RMC73--000R
K136	J0195248R	RMC73--000R
K137	J0796491R	RMC73M-000R
K139	J0195248R	RMC73--000R
K141	J0195250R	RMC73S 000R
K142	J0195250R	RMC73S 000R
K146	J0195248R	RMC73--000R
K152	J0195250R	RMC73S 000R
K157	J0195248R	RMC73--000R
K16	J0195250R	RMC73S 000R
K161	J0195248R	RMC73--000R
K165	J0195248R	RMC73--000R
K166	J0796491R	RMC73M-000R
K167	J0195250R	RMC73S 000R
K168	J0195250R	RMC73S 000R
K170	J0796491R	RMC73M-000R
K171	J0195248R	RMC73--000R
K175	J0195250R	RMC73S 000R
K176	J0195250R	RMC73S 000R
K182	J0796491R	RMC73M-000R
K183	J0796491R	RMC73M-000R
K189	J0796491R	RMC73M-000R
K192	J0796491R	RMC73M-000R
K197	J0195248R	RMC73--000R
K198	J0195248R	RMC73--000R
K199	J0195250R	RMC73S 000R
K20	J0195250R	RMC73S 000R
K200	J0195248R	RMC73--000R
K202	J0195250R	RMC73S 000R
K203	J0195248R	RMC73--000R
K206	J0796491R	RMC73M-000R
K216	J0796491R	RMC73M-000R
K220	J0796491R	RMC73M-000R
K225	J0195248R	RMC73--000R
K231	J0195248R	RMC73--000R
K233	J0195250R	RMC73S 000R
K236	J0195250R	RMC73S 000R
K237	J0195250R	RMC73S 000R
K240	J0195250R	RMC73S 000R
K241	J0195250R	RMC73S 000R
K242	J0195250R	RMC73S 000R
K243	J0195250R	RMC73S 000R
K25	J0195248R	RMC73--000R
K262	J0195250R	RMC73S 000R
K266	J0195250R	RMC73S 000R
K267	J0796491R	RMC73M-000R
K271	J0796491R	RMC73M-000R
K288	J0195248R	RMC73--000R
K289	J0796491R	RMC73M-000R
K293	J0195248R	RMC73--000R
K299	J0796491R	RMC73M-000R
K300	J0195250R	RMC73S 000R
K303	J0195250R	RMC73S 000R
K310	J0195250R	RMC73S 000R
K333	J0796491R	RMC73M-000R
K341	J0195248R	RMC73--000R
K343	J0195248R	RMC73--000R
K345	J0796491R	RMC73M-000R
K346	J0796491R	RMC73M-000R
K350	J0195248R	RMC73--000R
K39	J0195250R	RMC73S 000R
K504	J0195250R	RMC73S 000R
K510	J0796491R	RMC73M-000R
K512	J0195248R	RMC73--000R
K513	J0796491R	RMC73M-000R
K64	J0195250R	RMC73S 000R
K66	J0195248R	RMC73--000R
K67	J0195248R	RMC73--000R
K68	J0796491R	RMC73M-000R
K84	J0195248R	RMC73--000R
K85	J0195250R	RMC73S 000R
K86	J0195250R	RMC73S 000R
K87	A306099	BRACKET ASSEMBLY
K88	J0195248R	RMC73--000R
KVR900	W024001	0.56ML SFT TIN'D COP WIRE
L001	J2122943M	AXIAL COIL 10UH-J
L002	J2122943M	AXIAL COIL 10UH-J

A529450 PARTS LIST

I.D.	Part No.	Description
L003	J2122943M	AXIAL COIL 10UH-J
L200	J0195250R	RMC73S 000R
L201	J0195250R	RMC73S 000R
L202	J0195250R	RMC73S 000R
L203	J0195250R	RMC73S 000R
L204	J0195250R	RMC73S 000R
L205	J0195250R	RMC73S 000R
L208	J0195250R	RMC73S 000R
L210	J0195250R	RMC73S 000R
L256	J2123781R	FILTER COIL EL101K
L309	L420187	BLM11A102S
L310	L420187	BLM11A102S
L311	J0796491R	RMC73M-000R
L312	J0195250R	RMC73S 000R
L313	J0796491R	RMC73M-000R
L314	J0796491R	RMC73M-000R
L315	J0796491R	RMC73M-000R
L317	J0796491R	RMC73M-000R
L318	J0796491R	RMC73M-000R
L330	J2122956M	COIL LAL 100UH K
L331	J0796491R	RMC73M-000R
L333	L420187	BLM11A102S
L334	L420187	BLM11A102S
L335	J0195250R	RMC73S 000R
L336	J0796491R	RMC73M-000R
L337	J0796491R	RMC73M-000R
L338	J0796491R	RMC73M-000R
L340	J0796491R	RMC73M-000R
L341	J0796491R	RMC73M-000R
L348	J0796491R	RMC73M-000R
L349	J2123781R	FILTER COIL EL101K
L350	J2123781R	FILTER COIL EL101K
L351	J2123781R	FILTER COIL EL101K
L358	J0796491R	RMC73M-000R
L400	J2123781R	FILTER COIL EL101K
L419	L420187	BLM11A102S
L420	J2122943M	AXIAL COIL 10UH-J
L422	L420187	BLM11A102S
L423	J2122943M	AXIAL COIL 10UH-J
L443	L420187	BLM11A102S
L444	J2122943M	AXIAL COIL 10UH-J
L446	L420187	BLM11A102S
L447	J2122943M	AXIAL COIL 10UH-J
L451	J2122253M	AXIAL COIL 100uH K TAPE
L452	J2122253M	AXIAL COIL 100uH K TAPE
L453	J2122253M	AXIAL COIL 100uH K TAPE
L540	J2123781R	FILTER COIL EL101K
L553	J2123781R	FILTER COIL EL101K
L601	J2123462M	FERRITE BEADS TYPE B2.3UH
L602	L300002	RL8010-100J-UL-HUK-B06
L604	L300002	RL8010-100J-UL-HUK-B06
L700	JBH00039	HC-820KS1 (LHL10)
L701	J2123461M	FERRITE BEAD 0.8uH
L702	L380178	LIN COIL ISKRA
L704	J2123461M	FERRITE BEAD 0.8uH
L705	J2123462M	FERRITE BEADS TYPE B2.3UH
L751	L380117	BRIDGE COIL 5MH
L752	L380147	&BRIDGE COIL
L900	L210068	M/FILTER 97192 RIFA BEAB
L901	L210068	M/FILTER 97192 RIFA BEAB
L902	J2123462M	FERRITE BEADS TYPE B2.3UH
L903	J2123462M	FERRITE BEADS TYPE B2.3UH
L904	J2125579	CHOKE COIL 47UH
L905	J2123462M	FERRITE BEADS TYPE B2.3UH
L909	J2123462M	FERRITE BEADS TYPE B2.3UH
L911	L300005	RL8010-180J-UL-HUK-B06
L921	J2123462M	FERRITE BEADS TYPE B2.3UH
L931	J2123462M	FERRITE BEADS TYPE B2.3UH
L932	J2123462M	FERRITE BEADS TYPE B2.3UH
L935	J2123462M	FERRITE BEADS TYPE B2.3UH
L939	J2123462M	FERRITE BEADS TYPE B2.3UH
L955	J2123462M	FERRITE BEADS TYPE B2.3UH
L957	J2123462M	FERRITE BEADS TYPE B2.3UH
L961	L380184	BUCK COIL E20/10/5
L965	J2123462M	FERRITE BEADS TYPE B2.3UH
L992	J2123462M	FERRITE BEADS TYPE B2.3UH
LA01	JBH00034	HC-330K SI LH10TK
LA02	L380176	33UH PANASONIC ELC12E330
LA03	JBH00034	HC-330K SI LH10TK
LA04	L380176	33UH PANASONIC ELC12E330
LED2	T547049	SLR-325VC LED RED
LS201	J2122956M	COIL LAL 100UH K
LS42	J2123103M	LAL 02 AXIAL COIL 10uH
LS60	J2123103M	LAL 02 AXIAL COIL 10uH
P10	J2902261	PLG-02P2R5VPWB
P1015	J2902263	PLG-04P2R5VPWB
P302	J2902261	PLG-02P2R5VPWB
P303	J2902261	PLG-02P2R5VPWB
P701	J2661753	4 PIN PLUG WITH BASE
P802	J2902267	PLG-08P2R5V PWB
P803	J2902264	PLG-05P 2R5V PWB
P9	J2902261	PLG-02P2R5VPWB
P900	E825259	2 WAY MAIN HEADER UL BEAB
P902	J2661751	2P PIN PLUG & BASE
PA04	J2902263	PLG-04P2R5VPWB
PHONO2	E826951	STEREO PHONO SOCKET
Q002	T633153	2N7002 MOSFET
Q003	J2325691R	TRS 2SC2412K T146Q/R
Q004	J2325691R	TRS 2SC2412K T146Q/R
Q005	T633153	2N7002 MOSFET
Q006	J2325691R	TRS 2SC2412K T146Q/R
Q007	J2325691R	TRS 2SC2412K T146Q/R
Q008	J2325691R	TRS 2SC2412K T146Q/R
Q011	J2325691R	TRS 2SC2412K T146Q/R
Q200	J2325691R	TRS 2SC2412K T146Q/R
Q212	T631302	& DTC114YKAT146
Q213	T631302	& DTC114YKAT146
Q214	T631302	& DTC114YKAT146
Q215	T631302	& DTC114YKAT146
Q216	J2328161R	TRS 2SC4265JC02TR

A529450 PARTS LIST

I.D.	Part No.	Description
Q217	J2325691R	TRS 2SC2412K T146Q/R
Q330	J2325781R	TRS 2SA1037K T146Q/R
Q332A	J2325781R	TRS 2SA1037K T146Q/R
Q400	J2325691R	TRS 2SC2412K T146Q/R
Q401	J2325691R	TRS 2SC2412K T146Q/R
Q402	J2325691R	TRS 2SC2412K T146Q/R
Q403	J2325691R	TRS 2SC2412K T146Q/R
Q412	J2325781R	TRS 2SA1037K T146Q/R
Q413	J2316691R	STC-DTC144EK T146
Q501	J2325781R	TRS 2SA1037K T146Q/R
Q505	J2325781R	TRS 2SA1037K T146Q/R
Q507	J2325691R	TRS 2SC2412K T146Q/R
Q508	J2325691R	TRS 2SC2412K T146Q/R
Q509	J2325781R	TRS 2SA1037K T146Q/R
Q605	J2325691R	TRS 2SC2412K T146Q/R
Q606	J2325781R	TRS 2SA1037K T146Q/R
Q631	T636077	&IRFS530A ISOL SAMSUNG
Q631A	G884023	SPRING CLIP
Q701	T633137	TRANS BF459 MULLARD/SES
Q702	T732016	P0109DA THYRISTOR SGS
Q711	J2325781R	TRS 2SA1037K T146Q/R
Q751	J2315451	TRS-BU2508AF
Q751A	G884020	SPRING CLIP 56379-MULLARD
Q777	J2315891R	TRS JC548B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235418	POWER HEATSINK(TERNEX)
Q903B	G884020	SPRING CLIP 56379-MULLARD
Q904	T636077	&IRFS530A ISOL SAMSUNG
Q911	T636077	&IRFS530A ISOL SAMSUNG
Q912	T631309	TRANS BC557B BANDED
Q913	T633133	TRANS BF422 BAND MULL/AEG
Q919	J2315921R	TRS JC558B
Q922	J2315891R	TRS JC548B
Q923	T900796	&TL431CZ-AP SGS
Q927	T636094	MOSFET IRF640
Q927A	H224085	F9-4-220D-2LS
Q929	W024001	0.56ML SFT TIN'D COP WIRE
Q932	T633133	TRANS BF422 BAND MULL/AEG
Q951	J2315891R	TRS JC548B
Q964	T900473	SHUNT REG TL431CLP MOT/TEX
QA01	J2325691R	TRS 2SC2412K T146Q/R
QS40	J2325691R	TRS 2SC2412K T146Q/R
QS44	J2325781R	TRS 2SA1037K T146Q/R
QS60	J2325691R	TRS 2SC2412K T146Q/R
QS61	J2325781R	TRS 2SA1037K T146Q/R
R001	J0196093R	RMC73M-1F103JR
R002	J0196043R	RMC73M-1F101JR
R004	J0196093R	RMC73M-1F103JR
R005	J0196043R	RMC73M-1F101JR
R006	J0195883R	RMC73S 2A221JR
R007	J0195001R	RMC73 2B101JR
R008	J0196093R	RMC73M-1F103JR
R009	J0196093R	RMC73M-1F103JR
R010	J0196093R	RMC73M-1F103JR
R011	J0196093R	RMC73M-1F103JR
R012	J0196093R	RMC73M-1F103JR
R013	J0196043R	RMC73M-1F101JR
R014	J0196043R	RMC73M-1F101JR
R015	J0196043R	RMC73M-1F101JR
R016	J0196043R	RMC73M-1F101JR
R017	J0196093R	RMC73M-1F103JR
R018	J0196093R	RMC73M-1F103JR
R019	J0196086R	RMC73M-1F562JR
R020	J0196093R	RMC73M-1F103JR
R021	J0196068R	RMC73M-1F102JR
R022	J0196068R	RMC73M-1F102JR
R023	J0196068R	RMC73M-1F102JR
R024	J0195927R	RMC73S 2A123JR
R025	J0196095R	RMC73M - 1F123JR
R026	J0195032R	RMC73--2B393JR 1%
R027	J0196095R	RMC73M - 1F123JR
R028	J0195927R	RMC73S 2A123JR
R029	J0195933R	RMC73S 2A223JR
R030	J0195939R	RMC73S2A393JR
R031	J0195933R	RMC73S 2A223JR
R032	J0700054M	10K 1/16W C/FILM 5%
R033	J0196093R	RMC73M-1F103JR
R036	J0700054M	10K 1/16W C/FILM 5%
R037	J0195025R	RMC73 - 2B103JR
R038	J0196093R	RMC73M-1F103JR
R039	J0700049M	4K7 1/16W C/FILM 5%
R040	J0700041M	1K 1/16W C/FILM 5%
R041	J0700041M	1K 1/16W C/FILM 5%
R042	J0195875R	RMC73S 2A101JR
R043	J0700027M	100R 1/16W C/FILM 5%
R044	J0700027M	100R 1/16W C/FILM 5%
R045	J0196043R	RMC73M-1F101JR
R046	J0700027M	100R 1/16W C/FILM 5%
R047	J0196051R	RMC73M-1F221JR
R048U	J0700027M	100R 1/16W C/FILM 5%
R052	J0195875R	RMC73S 2A101JR
R053	J0196043R	RMC73M-1F101JR
R054	J0195013R	RMC73 2B102JR
R055	J0195013R	RMC73 2B102JR
R056	J0195013R	RMC73 2B102JR
R057	J0196093R	RMC73M-1F103JR
R058	J0196093R	RMC73M-1F103JR
R059	J0196093R	RMC73M-1F103JR
R060	J0196093R	RMC73M-1F103JR
R061	J0196093R	RMC73M-1F103JR
R062	J0196093R	RMC73M-1F103JR
R063	J0196043R	RMC73M-1F101JR
R064	J0196093R	RMC73M-1F103JR
R065	J0196043R	RMC73M-1F101JR
R066	J0195894R	RMC73S2A621JR 620R
R067	J0196093R	RMC73M-1F103JR
R070	J0196093R	RMC73M-1F103JR
R071	J0196093R	RMC73M-1F103JR
R074	J0195925R	RMC73S 2A103JR
R075	J0195941R	RMC73S 2A473JR

A529450 PARTS LIST

I.D.	Part No.	Description
R078	J0196093R	RMC73M-1F103JR
R079	J0196043R	RMC73M-1F101JR
R080	J0196043R	RMC73M-1F101JR
R081	J0196053R	RMC73M - 1F271JR
R082	J0196093R	RMC73M-1F103JR
R083	J0196043R	RMC73M-1F101JR
R084	J0196043R	RMC73M-1F101JR
R085	J0195875R	RMC73S 2A101JR
R090	J0700027M	100R 1/16W C/FILM 5%
R091	J0196043R	RMC73M-1F101JR
R092	J0196078R	RMC73M-1F272JR
R093	J0196043R	RMC73M-1F101JR
R094	J0196043R	RMC73M-1F101JR
R095	J0196043R	RMC73M-1F101JR
R096	J0196043R	RMC73M-1F101JR
R097	J0700027M	100R 1/16W C/FILM 5%
R098	R120330	100R 1/4W DRG NO
R099	J0196043R	RMC73M-1F101JR
R230	J0195918R	RMC73S 2A562JR
R257	J0700027M	100R 1/16W C/FILM 5%
R258	J0700027M	100R 1/16W C/FILM 5%
R259	J0195900R	RMC73S 2A102JR
R261	J0195250R	RMC73S 000R
R263	J0195885R	RMC73S 2A271JR
R264	J0195918R	RMC73S 2A562JR
R265	J0700038M	680R 1/16W C/FILM 5%
R266	J0196078R	RMC73M-1F272JR
R267	J0195018R	RMC73 2B272JR
R268	J0195910R	RMC73S-2A272JR
R269	J0195250R	RMC73S 000R
R270	J0195250R	RMC73S 000R
R271	J0195875R	RMC73S 2A101JR
R272	J0195920R	RMC73S 2A682JR
R273	J0196070R	RMC73M - 1F122JR
R274	J0196043R	RMC73M-1F101JR
R275	J0195893R	RMC73S 2A561JR
R276	J0195001R	RMC73 2B101JR
R277	J0195895R	RMC73S 2A681JR
R281	J0195885R	RMC73S 2A271JR
R282	J0195931R	RMC73S 2A183JR
R300	J0195943R	RMC73S-2A563JR
R303	J0195871R	RMC73S 2A750JR
R305	J0195871R	RMC73S 2A750JR
R306	J0195871R	RMC73S 2A750JR
R307	J0195875R	RMC73S 2A101JR
R309	J0195868R	RM73S 2A560JR 56R
R311	J0195871R	RMC73S 2A750JR
R314	J0195950R	RMC73S 2A104JR
R315	J0196093R	RMC73M-1F103JR
R317	J0195016R	RMC73--2B182JR 1K8 1206
R319	J0195001R	RMC73 2B101JR
R320	J0195871R	RMC73S 2A750JR
R321	J0196043R	RMC73M-1F101JR
R322	J0196043R	RMC73M-1F101JR
R323	J0195871R	RMC73S 2A750JR
R326	J0195871R	RMC73S 2A750JR
R330	J0195871R	RMC73S 2A750JR
R331	J0196043R	RMC73M-1F101JR
R332	J0195950R	RMC73S 2A104JR
R333	J0196043R	RMC73M-1F101JR
R334	J0195868R	RM73S 2A560JR 56R
R335	J0195871R	RMC73S 2A750JR
R336	J0196043R	RMC73M-1F101JR
R337	J0196043R	RMC73M-1F101JR
R338	J0195875R	RMC73S 2A101JR
R339	J0113722M	RDO5S2H750JB
R340	J0195875R	RMC73S 2A101JR
R342	J0195925R	RMC73S 2A103JR
R344	J0195906R	RMC73S--2A182JR
R346	J0700027M	100R 1/16W C/FILM 5%
R347	J0195001R	RMC73 2B101JR
R349	J0195875R	RMC73S 2A101JR
R350	J0195943R	RMC73S-2A563JR
R351	J0195895R	RMC73S 2A681JR
R352	J0196111R	RMC73M - 1F563JR
R353	J0195871R	RMC73S 2A750JR
R355	J0195871R	RMC73S 2A750JR
R356	J0195871R	RMC73S 2A750JR
R357	J0196093R	RMC73M-1F103JR
R358	J0195906R	RMC73S--2A182JR
R359	J0195871R	RMC73S 2A750JR
R360	J0196093R	RMC73M-1F103JR
R361	J0196093R	RMC73M-1F103JR
R389	J0196103R	RMC73M - 1F273JR
R390	J0195895R	RMC73S 2A681JR
R400	J0195900R	RMC73S 2A102JR
R401	J0195950R	RMC73S 2A104JR
R402	J0195945R	RMC73S 2A683JR
R403	J0195875R	RMC73S 2A101JR
R404	J0195943R	RMC73S-2A563JR
R405	J0195943R	RMC73S-2A563JR
R406	J0196059R	RMC73M-1F471JR
R407	J0195875R	RMC73S 2A101JR
R408	J0196068R	RMC73M-1F102JR
R409	J0113725M	100R RES CARBON FILM 1/2W
R410	J0196072R	RMC73M-1F152JR
R411	J0195900R	RMC73S 2A102JR
R412	J0196113R	RMC73M - 1F683JR
R413	J0196059R	RMC73M-1F471JR
R414	J0196043R	RMC73M-1F101JR
R415	J0196059R	RMC73M-1F471JR
R416	J0196043R	RMC73M-1F101JR
R417	J0195037R	RMC73 2B104JR
R419	J0195950R	RMC73S 2A104JR
R423	J0195950R	RMC73S 2A104JR
R424	J0195891R	RMC73S 2A471JR
R433	J0195875R	RMC73S 2A101JR
R434	J0195875R	RMC73S 2A101JR
R435	J0196066R	RMC73M - 1F911JR
R436	J0796491R	RMC73M-000R

A529450 PARTS LIST

I.D.	Part No.	Description
R437	J0796491R	RMC73M-000R
R438	J0196060R	RMC73M-1F511JR 510R
R439	J0196060R	RMC73M-1F511JR 510R
R440	J0196066R	RMC73M - 1F911JR
R441	J0196084R	RMC73M-1F472JR
R442	J0700034M	330R 1/16W C/FILM 5%
R446	J0195950R	RMC73S 2A104JR
R447	J0195891R	RMC73S 2A471JR
R448	J0196043R	RMC73M-1F101JR
R454	J0195950R	RMC73S 2A104JR
R465	J0196093R	RMC73M-1F103JR
R467	J0196093R	RMC73M-1F103JR
R469	J0195875R	RMC73S 2A101JR
R470	J0195875R	RMC73S 2A101JR
R471	J0700027M	100R 1/16W C/FILM 5%
R474	J0196043R	RMC73M-1F101JR
R475	J0196043R	RMC73M-1F101JR
R477	J0700027M	100R 1/16W C/FILM 5%
R478	J0700027M	100R 1/16W C/FILM 5%
R479	J0700027M	100R 1/16W C/FILM 5%
R480	J0700027M	100R 1/16W C/FILM 5%
R481	J0700027M	100R 1/16W C/FILM 5%
R482	J0700027M	100R 1/16W C/FILM 5%
R483	J0195875R	RMC73S 2A101JR
R484	J0195875R	RMC73S 2A101JR
R485	J0700027M	100R 1/16W C/FILM 5%
R486	J0195925R	RMC73S 2A103JR
R487	J0700027M	100R 1/16W C/FILM 5%
R488	J0195925R	RMC73S 2A103JR
R489	J0700027M	100R 1/16W C/FILM 5%
R490	J0700027M	100R 1/16W C/FILM 5%
R491	J0195925R	RMC73S 2A103JR
R492	J0195925R	RMC73S 2A103JR
R493	J0196068R	RMC73M-1F102JR
R494	J0196068R	RMC73M-1F102JR
R496	J0196088R	RMC73M-1F682JR
R497	J0196105R	RMC73M-1F333JR
R498	J0196043R	RMC73M-1F101JR
R499	J0196051R	RMC73M-1F221JR
R500	J0195929R	RMC73S 2A153JR
R501	J0195025R	RMC73 - 2B103JR
R502	J0196090R	RMC73M-1F822JR 8K2 0603
R504	J0196088R	RMC73M-1F682JR
R509	J0195939R	RMC73S2A393JR
R532	J0195875R	RMC73S 2A101JR
R533	J0195900R	RMC73S 2A102JR
R534	J0195875R	RMC73S 2A101JR
R535	J0195875R	RMC73S 2A101JR
R536	J0195875R	RMC73S 2A101JR
R537	J0195875R	RMC73S 2A101JR
R538	J0700027M	100R 1/16W C/FILM 5%
R539	J0700027M	100R 1/16W C/FILM 5%
R540	J0195875R	RMC73S 2A101JR
R541	J0195248R	RMC73--000R
R542	J0700027M	100R 1/16W C/FILM 5%
R543	J0700027M	100R 1/16W C/FILM 5%
R544	J0195887R	RMC73S 2A331JR
R545	J0195875R	RMC73S 2A101JR
R546	J0196043R	RMC73M-1F101JR
R547	J0196043R	RMC73M-1F101JR
R548	J0195007R	RMC73--2B331JR
R549	J0195879R	RMC73S 2A151JR
R550	J0196049R	RMC73M-1F181JR 180R 0603
R560	J0195001R	RMC73 2B101JR
R571	J0196068R	RMC73M-1F102JR
R586	J0195891R	RMC73S 2A471JR
R589	J0195910R	RMC73S-2A272JR
R600	J0196093R	RMC73M-1F103JR
R602	J0113684M	RNL-2R2J1-02LT
R603	J0113684M	RNL-2R2J1-02LT
R605	J0700075M	390K 1/16W C/FILM 5%
R606	J0195941R	RMC73S 2A473JR
R607	J0196043R	RMC73M-1F101JR
R608	J0195875R	RMC73S 2A101JR
R610	R232330	2K2 1/4W DRG NO
R611	R326330	360R 1/4W DRG NO
R612	R217330	27R 1/4W DRG NO
R613	R658330	680K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R616	J0196068R	RMC73M-1F102JR
R634	R232330	2K2 1/4W DRG NO
R635	R232330	2K2 1/4W DRG NO
R636	J0700051M	5K6 1/16W C/FILM 5%
R637	R120330	100R 1/4W DRG NO
R638	J0700049M	4K7 1/16W C/FILM 5%
R639	J0700049M	4K7 1/16W C/FILM 5%
R666	J0196068R	RMC73M-1F102JR
R667	J0700049M	4K7 1/16W C/FILM 5%
R702	R333330	3K3 1/4W DRG NO
R704	R648330	68K 1/4W DRG NO
R705	J0140931S	RSL-332J7WS(BSR-Z)
R706	R437571	4K7 2W 5% M02SL
R707	R135330	1K5 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R710	R217571	27R 2W 5% MO2SL
R710A	R217571	27R 2W 5% MO2SL
R711	R217571	27R 2W 5% MO2SL
R711A	R217571	27R 2W 5% MO2SL
R712	J0195925R	RMC73S 2A103JR
R713	J0100069M	RES FLM 1/8W 1.5K
R714	J0113748M	RD14S2H821JB
R715	J0110163S	RS08B3A562JS
R716	J0700054M	10K 1/16W C/FILM 5%
R717	J0700072M	220K 1/16W C/FILM 5%
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119649M	RN14S2B563FB(KOA)
R720	J0140933S	RSL-472J7WS(BSR-Z)
R724	J0110273S	RSO8B3D153JS
R725	R232570	2K2 1W 5% MO1SL
R731	R217571	27R 2W 5% MO2SL

A529450 PARTS LIST

I.D.	Part No.	Description
R731A	R217571	27R 2W 5% MO2SL
R732	R217571	27R 2W 5% MO2SL
R732A	R217571	27R 2W 5% MO2SL
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R531330	5K1 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R738	R232330	2K2 1/4W DRG NO
R740	R457330	470K 1/4W DRG NO
R742	J0113735M	RD14S2H271JB
R745	R437330	4K7 1/4W DRG NO
R746	R120571	100R 2W 5% M02SL
R749	R242330	22K 1/4W DRG NO
R752	J0700074M	330K 1/16W C/FILM 5%
R757	J0700063M	47K 1/16W C/FILM 5%
R759	R536330	5K6 1/4W DRG NO
R764	R150330	100K 1/4W DRG NO
R765	J0700027M	100R 1/16W C/FILM 5%
R767	J0195875R	RMC73S 2A101JR
R768	J0196093R	RMC73M-1F103JR
R769	J0195902R	RMC73S 2A122JR
R770	R140730	10K 2% 1/4W MFR4
R776	J0700073M	270K 1/16W C/FILM 5%
R778	J0700056M	15K 1/16W C/FILM 5%
R779	R120571	100R 2W 5% M02SL
R780	R232330	2K2 1/4W DRG NO
R901	R242571	22K 2W M02S
R902	R546330	56K 1/4W DRG NO
R903	R222330	220R 1/4W DRG NO
R905	R150330	100K 1/4W DRG NO
R906	R130330	1K 1/4W DRG NO
R908	R130330	1K 1/4W DRG NO
R909	J0147642	RW99J3Y220JM 22R 7W
R911	R132725	1K2 MRS16T 1% M/F 1/16W
R912	R842736	82K 1% MF MFR4
R913	R447330	47K 1/4W DRG NO
R915	R658725	680K MRS16T 1% M/F
R916	J0700049M	4K7 1/16W C/FILM 5%
R917	R658725	680K MRS16T 1% M/F
R920	R140330	10K 1/4W DRG NO
R921	R546736	56K MFR4 1% 1/4W
R922	R247725	27K MRS16T1% M/FILM
R927	J0110281S	RS08B3D333JS
R932	R120330	100R 1/4W DRG NO
R933	J0700049M	4K7 1/16W C/FILM 5%
R941	R536330	5K6 1/4W DRG NO
R942	R521330	510R 1/4W DRG NO
R943	R120330	100R 1/4W DRG NO
R944	R244725	24K MRS16T 1% 1/16W
R945	R140725	10K MRS16T 1% M/FILM
R946	J0147544	RW99J3H150JM 15R 5W
R950	R433725	4K3 MRS16T 1/16W 1%
R951	R110731	10R 1/2W M/F MFR5 2%
R952	J0700058M	22K 1/16W C/FILM 5%
R953	J0700049M	4K7 1/16W C/FILM 5%
R954	J0700049M	4K7 1/16W C/FILM 5%
R956	R000618	0.5R 2W WIRE WOUND 5%
R957	R323330	330R 1/4W DRG NO
R958	R842736	82K 1% MF MFR4
R959	R556725	560K MRS16T 1% M/FILM
R960	R133725	1K3 MRS16T 1% M/FILM
R961	J0700052M	6K8 1/16W C/FILM 5%
R962	R130330	1K 1/4W DRG NO
R963	J0700041M	1K 1/16W C/FILM 5%
R966	R130330	1K 1/4W DRG NO
R967	J0700072M	220K 1/16W C/FILM 5%
R968	R000618	0.5R 2W WIRE WOUND 5%
R969	R242330	22K 1/4W DRG NO
R970	R120330	100R 1/4W DRG NO
R971	J0144050	ERF5ZK122 1K2 KOA RES 5W
R972	R150744	&100K 3W PRO3 M/F LANCET
R975	J0700041M	1K 1/16W C/FILM 5%
R976	R323330	330R 1/4W DRG NO
R977	R120330	100R 1/4W DRG NO
R978	R427330	470R 1/4W DRG NO
R980	R100551	1R 1/4W FR8225(TDK)-BEAB-
R981	J0700064M	56K 1/16W C/FILM 5%
R982	R319330	39R 1/4W DRG NO
R985	J0187072M	2K0 1/16W PHILIPS
R986	R150330	100K 1/4W DRG NO
R987	R319330	39R 1/4W DRG NO
R988	J0700067M	100K 1/16W C/FILM 5%
R989	E441045	PTC TYPE 2322-662-96624
R990	R316330	36R 1/4W
R991	R353714	330K 1/2W METAL FLM-BEAB
R992	J0700058M	22K 1/16W C/FILM 5%
R993	J0700056M	15K 1/16W C/FILM 5%
R994	R323330	330R 1/4W DRG NO
R996	R427330	470R 1/4W DRG NO
R997	J0187092M	RD14S1J133JB
R998	R323571	330R 2W 5% MO2S F
R999	R170727	10M 1W VR68 UL BEAB
RA01	J0700027M	100R 1/16W C/FILM 5%
RA02	J0196093R	RMC73M-1F103JR
RA03	J0700047M	3K3 1/16W C/FILM 5%
RA04	J0700055M	12K 1/16W C/FILM 5%
RA05	R120330	100R 1/4W DRG NO
RA06	J0196101R	RMC73M-1F223JR 1608
RA07	J0196111R	RMC73M - 1F563JR
RA08	J0196113R	RMC73M - 1F683JR
RA09	J0196101R	RMC73M-1F223JR 1608
RA10	J0196111R	RMC73M - 1F563JR
RA11	J0196084R	RMC73M-1F472JR
RA12	J0196113R	RMC73M - 1F683JR
RA13	J0196093R	RMC73M-1F103JR
RA14	R120330	100R 1/4W DRG NO
RA15	J0196084R	RMC73M-1F472JR
RA16	J0196104R	RMC73M-1F303JR 30K 0603
RA17	J0195953R	RMC73S-2A134JR 130K
RA18	J0700012M	6R8 1/16W C/FILM 5%
RA19	J0195025R	RMC73 - 2B103JR

A529450 PARTS LIST

I.D.	Part No.	Description
RA20	J0187086M	RD14S1J752JB
RA21	J0195025R	RMC73 - 2B103JR
RA22	J0187086M	RD14S1J752JB
RA23	J0196078R	RMC73M-1F272JR
RA24	J0700054M	10K 1/16W C/FILM 5%
RA25	J0196093R	RMC73M-1F103JR
RA26	J0195916R	RMC73S 2A472JR
RA27	R427748	470R 3W PRO3 5% TAPED
RA31	J0796491R	RMC73M-000R
RA32	J0196078R	RMC73M-1F272JR
RA33	J0195945R	RMC73S 2A683JR
RA34	J0195945R	RMC73S 2A683JR
RA35	J0195910R	RMC73S-2A272JR
RA36	J0196045R	RMC73M-1F121JR 120R 1608
RA37	J0196045R	RMC73M-1F121JR 120R 1608
RA38	J0196118R	RMC73M-1F104JR 100K
RA39	J0196030R	RMC73M-1F330JR 33R
RA40	J0196118R	RMC73M-1F104JR 100K
RA41	J0196030R	RMC73M-1F330JR 33R
RA45	J0113725M	100R RES CARBON FILM 1/2W
RM01	J0196043R	RMC73M-1F101JR
RM02	J0196043R	RMC73M-1F101JR
RM05	J0195001R	RMC73 2B101JR
RM06	J0196043R	RMC73M-1F101JR
RM07	J0700027M	100R 1/16W C/FILM 5%
RM08	J0196043R	RMC73M-1F101JR
RM09	J0196043R	RMC73M-1F101JR
RM10	J0196043R	RMC73M-1F101JR
RM13	J0196093R	RMC73M-1F103JR
RM14	J0196093R	RMC73M-1F103JR
RM15	J0195025R	RMC73 - 2B103JR
RM16	J0195025R	RMC73 - 2B103JR
RM17	J0196093R	RMC73M-1F103JR
RM51	J0700054M	10K 1/16W C/FILM 5%
RS40	J0700049M	4K7 1/16W C/FILM 5%
RS41	J0195900R	RMC73S 2A102JR
RS46	J0196118R	RMC73M-1F104JR 100K
RS47	J0196068R	RMC73M-1F102JR
RS49	J0700041M	1K 1/16W C/FILM 5%
RS60	J0196118R	RMC73M-1F104JR 100K
RS61	J0196084R	RMC73M-1F472JR
RS62	J0700041M	1K 1/16W C/FILM 5%
RS64	J0195900R	RMC73S 2A102JR
RS65	J0195900R	RMC73S 2A102JR
S001	E139506	5 WAY TACT SWITCH
SCART1	E826946	A20 DOUBLE SCART
SCART2	E826945	SINGLE SCART METALLO
SHROUD	X321241	&ACTUATOR SHROUD
SW900	J2634732	SWITCH SDD-FC BEAB
T700	JBW01041	FBT HFL1532G BEABT
T702	J2260291U	H DRIVE TRANSFORMER TAW
T900	L380172	SW MODE EE4215 OREGA BEAB
T902	L380181	SW MODE XXXX CT286D8 BEAB
VR904	E311108	500R POT HORIZONTAL TAPE
VR964	J0160211R	EVND8AA03B13-TAPE(PANA)
W002	EC5A100A	7/0.2MM S000030
W003	EC5A060A	7/0.2MM S000030
W005	EC530603	7/0.2MM S000010
W008	EC5A120A	7/0.2 S000030
W009	EC5A060A	7/0.2MM S000030
W010	EC530903	7/0.2MM S000029
W018	EC530203	7/0.2MM S000010
W019	EC530603	7/0.2MM S000010
W020	EC530303	7/0.2MM S000010
W021	EC5A120A	7/0.2 S000030
W022	EC530903	7/0.2MM S000029
W023	EC530203	7/0.2MM S000010
W024	EC5A110A	7/0.2MM S000030
X001	E516081F	CRYSTAL 6MHZ
X200	E518054	K9453M
X219	E518053	K3953M
X305	L420187	BLM11A102S
X412	E516070	X'TAL 18.432MHZ
X513	E516030F	12MHz X'TAL NDK 5MM LEG
Z005	T536219	BZX79B3V3~PHILIPS~
Z006	T536312	PDZ-B 3.6B 2% SMT ZENER
Z007	T536279	BZX284-C5V6 5% S MOUNT
Z008	T536279	BZX284-C5V6 5% S MOUNT
Z014	T536312	PDZ-B 3.6B 2% SMT ZENER
Z205	T536215	BZX 79C 33V~PHILIPS~
Z404	T536181	BZX79C 13V~PHILIPS~
Z501	T536184	BZX79C 9V1~PHILIPS~
Z502	T536184	BZX79C 9V1~PHILIPS~
Z503	T536184	BZX79C 9V1~PHILIPS~
Z504	T536184	BZX79C 9V1~PHILIPS~
Z505	T536284	BZX284-C9V1
Z506	T536284	BZX284-C9V1
Z507	T536277	BZX284-C 4V7 5%
Z600	T536178	BZX79C 3V3~PHILIPS~
Z601	T536178	BZX79C 3V3~PHILIPS~
Z603A	T536173	BZX79C18V~PHILIPS~
Z603B	T536215	BZX 79C 33V~PHILIPS~
Z604	T536259	BZX79C56V
Z607	T536284	BZX284-C9V1
Z608	T536284	BZX284-C9V1
Z610	T536173	BZX79C18V~PHILIPS~
Z615	T536172	BZX79C27V~PHILIPS~
Z616	T536280	BZX284-C6V2
Z703	T536235	BZX79B18V~PHILIPS~
Z713	J2339251M	HZS36-ILT
Z741	T536259	BZX79C56V
Z744	T536227	BZX79B7V5~PHILIPS~
Z900	T536266	BZV85-C27V
Z927	T536173	BZX79C18V~PHILIPS~
Z942	T536179	BZX79C 6V2~PHILIPS~
Z964	T536236	BZX79B22V~PHILIPS~
Z990	T536173	BZX79C18V~PHILIPS~
Z991	T536173	BZX79C18V~PHILIPS~
Z992	T536173	BZX79C18V~PHILIPS~
ZA01	T536279	BZX284-C5V6 5% S MOUNT

A529450 PARTS LIST

I.D.	Part No.	Description
ZA08	T536268	BZV85-C22V
ZA10	T536172	BZX79C27V~PHILIPS~
ZR048A	W470200	1MM 1/D SLEEVING BLACK
ZR048B	W470200	1MM 1/D SLEEVING BLACK
ZS42	T536271	BZX284-C2V7
ZS60	T536271	BZX284-C2V7
ZZA08	W470200	1MM 1/D SLEEVING BLACK

HITACHI

Hitachi, Ltd. Tokyo, Japan
International Sales Division
THE HITACHI ATAGO BUILDING,
No. 15 –12 Nishi Shinbashi, 2 – Chome,
Minato – Ku, Tokyo 105-8430, Japan.
Tel: 03 35022111

HITACHI EUROPE LTD.
Dukes Meadow
Millboard Road
Bourne End
Buckinghamshire
SL8 5XF
UNITED KINGDOM
Tel: 01628 643000
Fax: 01628 643400
Email: consumer-service@hitachi-eu.com

HITACHI EUROPE S.A.
364, Kifissias Ave. & 1, Delfon Str.
152 33 Chalandri
Athens
GREECE
Tel: 1-6837200
Fax: 1-6835694
Email: service.hellas@hitachi-eu.com

HITACHI EUROPE GmbH
Munich Office
Dornacher Strasse 3
D-85622 Feldkirchen bei München
GERMANY
Tel: +49 -89-991 80-0
Fax: +49 - 89 - 991 80 -224
Hotline: +49 - 180 - 551 25 51 (12ct/min.)
Email: HSE-DUS.Service@Hitachi-eu.com

HITACHI EUROPE S.A.
Gran Via Carlos III, 101 - 1
08028 Barcelona
SPAIN
Tel: 93 409 2550
Fax: 93 491 3513
Email: rplan@hitachi-eu.com

HITACHI EUROPE SRL
Via T. Gulli n.39
20147 MILAN
ITALY
Tel: 02 487861
Fax: 02 48786381
Servizio Clienti
Tel. 02 38073415
Email: customerservice.italy@hitachi-eu.com

HITACHI EUROPE AB
Box 77
S-164 94 KISTA
SWEDEN
Tel: 08 562 711 00
Fax: 08 562 711 11
Email: csgswe@hitachi-eu.com

HITACHI EUROPE S.A.S
Lyon Office
B.P. 45, 69671 Bron Cedex
FRANCE
Tel: 04 72 14 29 70
Fax: 04 72 14 29 99
Email: france.consommateur@hitachi-eu.com

HITACHI EUROPE LTD.
Norwegian Branch Office
Strandveien 18
1366 Dysaker
NORWAY
Tel: 02205 9060
Fax: 02205 9061
Email csgnor@hitachi-eu.com

ITEM N.V./S.A. (INTERNATIONAL TRADE FOR ELECTRONIC MATERIAL & MEDIA N.V./S.A)
UCO Tower – Bellevue, 17
B – 9050 GENT
BELGIUM (for BENELUX)
Tel: 09 230 48 01
Fax: 09 230 96 80
Email: hitachi.item@skynet.be

www.hitachi-consumer-eu.com

SM00031
January 2001